



System Control Operational Document – Policy

System Knowledge – Power System Knowledge

Secure System Guidelines

Table of contents

1	Scope.....	2
2	Definitions	3
3	Determining Base Capacity.....	6
4	Determining Standby Reserve.....	7
5	Inertia Ancillary Service.....	9
6	Determining adequate Regulating Reserve.....	11
7	Contingency Frequency Control Ancillary Service (FCAS) / Spinning Reserve.....	12
8	Determining adequate voltage levels for the System.....	16
9	Determining adequate Reactive Power Reserve for the System.....	17
10	Determining adequate frequency levels	18
11	Determining adequate energy for the System	19
12	Determining capacity of transmission assets	20
13	Determining fault level requirements.....	21
14	System stability	22
15	Adoption of Reliability Criteria for networks.....	23
16	Power system outage planning	24
17	Determining adequate protection integrity	25
18	Generator and Load Registration Thresholds.....	26
19	Special Control and Protection Requirements or Schemes	27
20	Black Start and System Black Restart procedures	29
21	Records	30
22	Document History.....	31

Document Control		
HPE No: BDOC####/#####	Document Type: Policy	View Access: Unrestricted
Document release/reviewed date: dd/mm/yyyy	Review period: 1 Year	
Document Owner: Operational Systems Manager - System Control	Document Sponsor: General Manager - System Control	

1 Scope

This policy applies to Secure System Guidelines.

This Reference Document details Guidelines setting out the principles for determining whether a Power System operated under Licence from the NT Utilities Commission is in a Secure Operating State.

This Document is produced under the auspices of the System Control Technical Code. Should any conflict arise between this document and the System Control Technical Code, the Code shall prevail.

For further understanding or resolution of issues relating to this document, please refer all matters to the Power System Controller.

Where potentially commercial-in-confidence information is necessary to ensure the Guidelines are sufficiently clear, the relevant information will be detailed in Participant-specific attachments and are negotiated separately.

2 Definitions

AGC	Automatic Generator Control
AS	Ancillary Service
BA	Bachelor (Zone Substation)
Base Capacity	As defined in Section 3 (Determining Base Capacity)
CI	Channel Island (Zone Substation)
CIPS	Channel Island Power Station
Credible Contingency	As defined in Section 15 (Adoption of Reliability Criteria for networks)
DKTL	Darwin – Katherine Transmission Line
Embedded Generator	As defined in the SCTC
FCAS or: Contingency Raise or Lower or: Contingency Reserve	As defined in Section 7 (Contingency Frequency Control Ancillary Service (FCAS) / Spinning Reserve)
Gould AR PLC	A programmable logic circuit installed at MT, PK and KA for the DKTS signalling Scheme.
HRSG	Heat Recovery Steam Generator
HV	High Voltage
Inertia Ancillary Service (IAS)	As per Section 5 (Inertia Ancillary Service)
Isochronous (Isoch)	Governor in speed (or Frequency) control mode.
KA	Katherine (Zone Substation)
KPS	Katherine Power Station
kW	Kilo Watt (1000 W)
Lack of Standby Generation (LOS)	As defined in the SCTC and Section 4 (Determining Standby Reserve)
LDC	Line Drop Compensation
LORR	Lack of Reactive Reserve

Material load	Load of a sufficient size such that sudden disconnection may result in a measurable frequency disruption.
MT	Manton (Zone Substation)
MW	Mega Watt (1000 kW)
N Criteria	Equipment operated without redundancy.
N-1 Criteria	Equipment operated with a single level of redundancy.
NCTC	Network Connection Technical Code
Network Operator	As defined in the SCTC
OFGS	Over Frequency Generator Shedding
OLTC	On Load Tap Change
PC	Pine Creek 66kV (Zone Substation)
PCPS	Pine Creek Power Station
PK	Pine Creek 132kV (Zone Substation)
Power System Controller (PSC)	As defined in the SCTC
Protected Event	As defined in Section 15 (Adoption of Reliability Criteria for networks)
PWC	Power and Water Corporation
Reactive Power Reserve	As defined in the SCTC and Section 9 (Determining adequate Reactive Power Reserve for the System)
Regulating Reserve	As defined in the SCTC and Section 6 (Determining adequate Regulating Reserve)
SCTC	System Control Technical Code
Shall, will	Mandatory
Should, may	Recommended
Spinning Reserve	As defined in the SCTC and Section 7 (Contingency Frequency Control Ancillary Service (FCAS) / Spinning Reserve)
SSG	Secure System Guidelines
UFLS	Under Frequency Load Shedding

WD	Weddell (Zone Substation)
WPS	Weddell Power Station
ZSS	Zone Substation

3 Determining Base Capacity

Base capacity of generating units shall not take into account use of facilities that might provide short term (defined as 4 hours or less) capacity gains.

Base Capacity is defined as the maximum sustainable output in a generation unit under the worst seasonal ambient conditions.

For a generating unit with a staged output capability (such as water injection) the unit will have a variable base capacity. This base capacity of such unit will consider the availability of the staged output, whether it is currently online and the intended utilization of this capacity. I.e. if a staged output is available but offline, it may count towards planning criteria for maintenance outages, but not to spinning reserve/FCAS.

Base Capacity will be according to advice from the System Participant to the Power System Controller. System Participants shall provide the Power System Controller with advice of any variation to the Base Capacity of a unit promptly in writing. The Power System Controller is responsible for accrediting these Base Capacities provided by the System Participants and may amend the figure as required.

The Power System Controller will take a conservative approach in accrediting Base Capacity of a generating unit. An untested increase in Base Capacity may be accredited at a lower value than the Participants' advice until there is an appropriate opportunity to test under the worst expected seasonal ambient conditions.

The Power System Controller is cognisant of the business requirements involved with tests and will endeavour to undertake these tests where they minimise impact to System Participants (e.g. following a machine start where there is a surplus of Spinning Reserve/FCAS).

Application

Refer to document "Secure System Guidelines Generation Specifics".

4 Determining Standby Reserve

The Power System Controller will determine the required generation capacity of a power system according to the summation of:

- the actual or forecasted load of the power system,
- the required spinning reserve or FCAS raise of the power system, and
- the capacity at risk from a credible or protected contingency event.

The Power System Controller will declare a Lack of Standby Generation (LOS) condition when the available generation plant capacity is below the calculated required generation capacity. LOS Conditions will be classified according to the considered actual or expected severity of generation shortfall.

LOS1 Condition

LOS1 is declared when the occurrence of a protected contingency event involving the loss of the largest available generation node in the power system will result in the power system operating outside the technical envelope.

LOS2 Condition

LOS2 is declared when the occurrence of a single credible contingency event involving the loss of the largest generation unit available in the power system, will result in the power system operating outside the technical envelope.

In determining the largest available generation unit, the effective load of an online combined cycle unit is deemed to be the load of the open cycle unit plus the inferred load derived from its associated HRSG.

LOS3 Condition

LOS3 is declared when the power system is operating outside of the technical envelope, the minimum spinning reserve or FCAS raise has been breached and/or the Power System Controller is implementing measures to maintain system security.

LOS Margins

LOS Margins set the boundaries for determining and declaring when the power system is in any of the three LOS Conditions. The following figure provides the formulae the Power System Controller will utilise to calculate the three LOS margins, and illustrates the application of the LOS Margins to determine LOS Conditions.

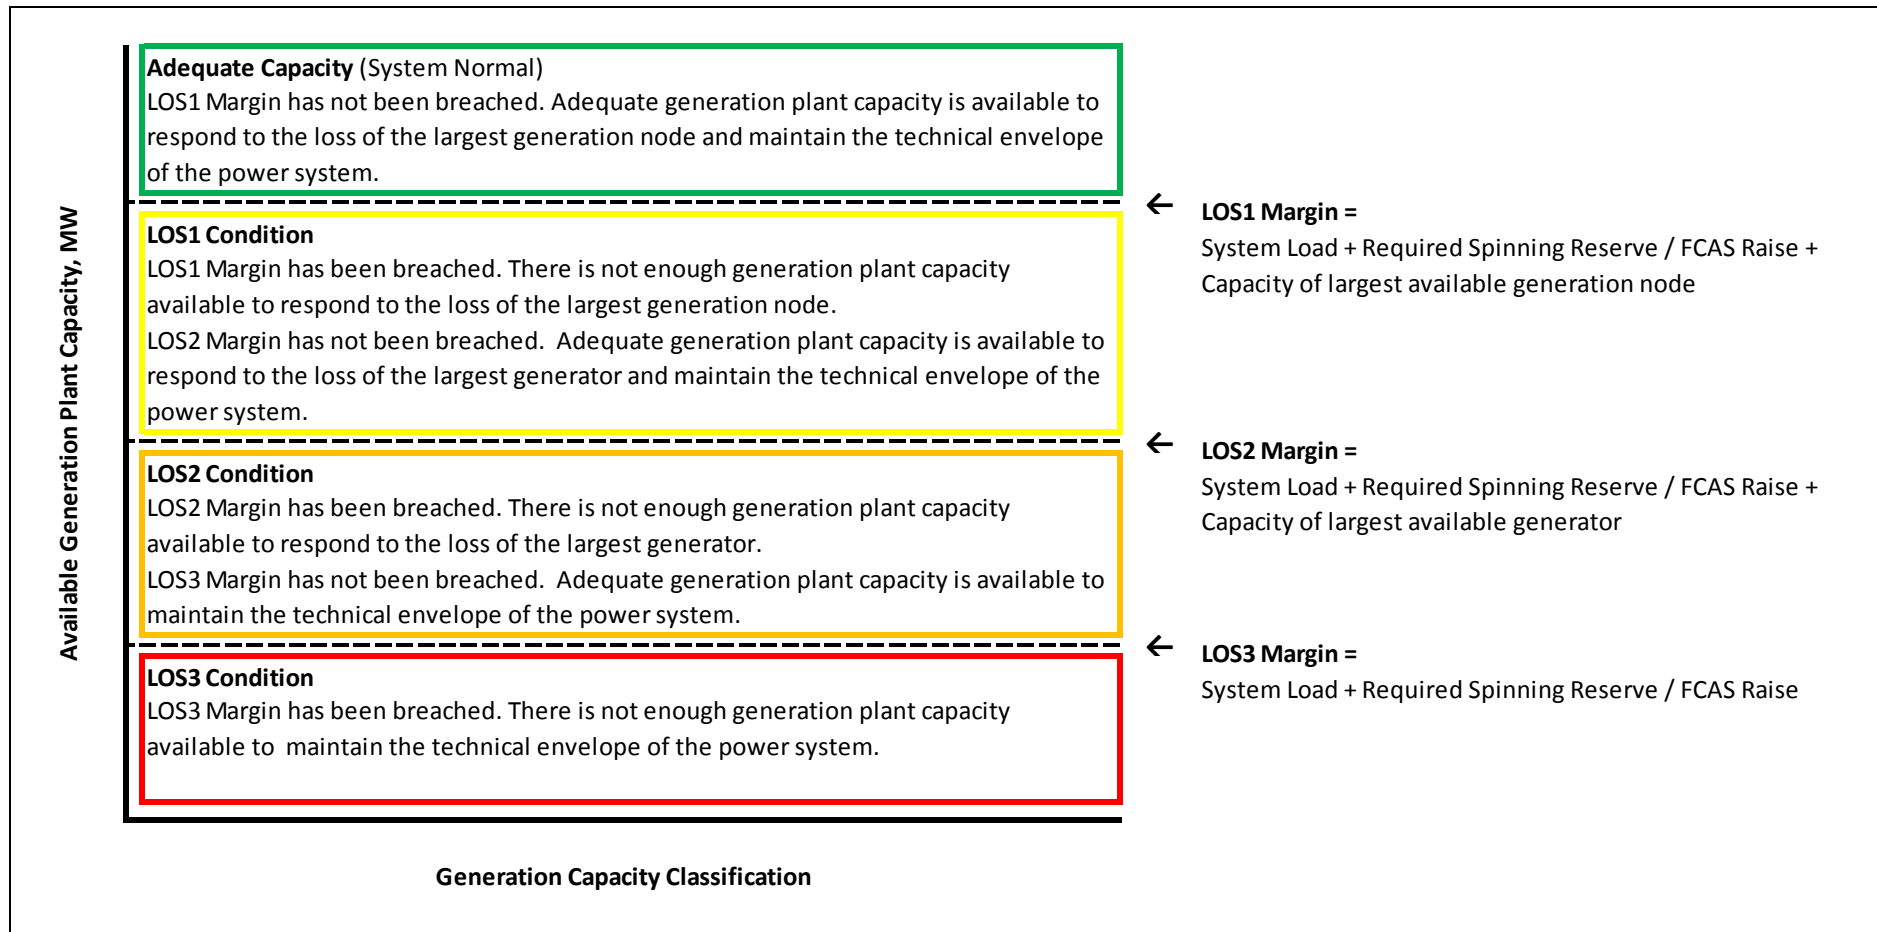


Figure 1: LOS Classification

5 Inertia Ancillary Service

The amount of inertia online determines the rate at which frequency changes immediately following a sudden imbalance between the supply (generation) and demand (load) which results from:

- an unexpected disconnection of generating units,
- an unexpected disconnection of transmission equipment, or
- sudden loss of load or fault on the system.

The less inertia online the greater the rate of frequency change immediately following such an event.

For a protected contingency event, there is a large demand/supply mismatch and the post-contingent inertia online is a determining factor for the Rate of Change of Frequency (RoCoF). Frequency control ancillary services are not intended to prevent loss of supply in such situations; the under frequency load shedding (UFLS) scheme is designed to operate to prevent a cascading failure leading to system black.

For protected contingency events a minimum amount of post contingent inertia is required to limit the initial RoCoF. This is required to ensure RoCoF is sufficiently low such that:

- Orderly UFLS or OFGS occurs and;
- RoCoF remains within the capabilities of the dispatched generation to prevent pole slipping (leading to cascading failure).

The current assessed allowable initial RoCoF is 4Hz/sec. This figure is preliminary only and further assessment is required, however in the interim it will be used to manage protected events until the RoCoF limits are accurately determined for each system.

The Power System controller may take actions to constrain additional inertia online where required or other constraints to minimise the contingency size to prevent system black from a protected contingency event.

For single contingency generator events, the frequency control ancillary services are dispatched to prevent an operation of the UFLS. The amount of frequency control raise service dispatched is dependent upon the post-contingent inertia online.

This IAS places a requirement for the Power System to maintain a minimum amount of inertia online following a single contingent event.

AS Principle:

IAS is specified as a minimum required amount of post single contingency online inertia. This:

- Ensures that the rate of frequency change for single contingency events can be managed by the Frequency Control Ancillary Service (FCAS) raise/lower
- Provides a degree of consideration for multiple contingency events regarding settings for the UFLS and generator over-frequency protection.

For determination of IAS, inertia connected to the power system is categorised in two groups.

- Inertia with post-contingent frequency disruption (Group 1)
- Inertia without post-contingent frequency disruption (Group 2)

Specifically, any inertia lost by a single credible contingency that does not also result in a frequency disruption is considered as "Inertia without post-contingent frequency disruption". An

example of this would be loss of a synchronous condenser connected at an interconnected section of the grid.

However, if an inertia source is connected with material load, it may disconnect with load resulting in a post-contingent frequency disruption. Similarly, generators providing inertia and supplying real power if tripped would result in a frequency disturbance due to the loss of MW output.

IAS is determined by:

$$\text{Post Contingent Inertia} = \left(\sum \text{Inertia}_{G2} + \sum \text{Inertia}_{G1} \right) - \max\{\text{Inertia}_{G1}\}$$

It is noted that Synchronous and Non-Synchronous (emulated) inertia sources have different operational performance. Synchronous Inertia is to be independently tested and the determined inertia provided to the Power System Controller for assessment. Emulated Inertia will be assessed on additional factors of operational performance including, but not limited to the following:

- Measurement time
- Signalling time
- Activation time
- Ramping time

Based on the assessment of an emulated inertia or engineering technology, the technology may be accredited with an inertia contribution, an FCAS raise/lower contribution or another determination as deemed appropriate by the Power System Controller.

All inertia contributions (whether synchronous or emulated) towards the IAS are only accredited by the Power System Controller.

Regional Application

Darwin/Katherine

Implementation Date: TBD.
 Minimum IAS: TBD.
 Material load defined as: 1 MW or greater

Tennant Creek

Implementation Date: TBD.
 Minimum IAS: TBD.
 Material load defined as: 30 kW or greater

Alice Springs

Implementation Date: TBD.
 Minimum IAS: TBD.
 Material load defined as: 200 kW or greater

6 Determining adequate Regulating Reserve

Regulating Reserve is that capacity of a generating unit or units available to regulate frequency to within the defined normal operating limits including time error correction. Regulating Reserve is only the amount required to follow the normal load changes and output variation in unregulated generation (embedded or registered), not the loss of load or load restoration following loss of load; this is covered by Contingency Reserve – refer to Section 7 (Contingency Frequency Control Ancillary Service (FCAS) / Spinning Reserve).

The minimum amount of Regulating Reserve will be a dynamic requirement based as per the following:

$$\text{Minimum Regulating Reserve} = \text{Greater of } \left\{ \begin{array}{l} \text{Minimum Regional Figure} \\ \text{System Load Rate of Change} \end{array} \right.$$

System Load Rate of Change is a dynamic figure determined by the change (or anticipated change) in the summation of all online machine MW output over the region specific duration. The region specific duration is defined as two times the Average Regulating Unit Start Time. This allows for a single failure to start a regulating unit without breaching the Minimum Regulating Reserve requirement.

System Load Rate of Change will require to take into account anticipated load changes such as rain storms approaching populated areas.

Where this is not practical, the Power System Controller will determine the appropriate course of action.

The Power System Controller will appoint the regulating units which operate to regulate frequency, and determine the control mode for all regulating units.

Regulating Reserve will be altered as required under planned/forced outages (e.g. Islanding) on a case by case basis; expectations are that the minimum requirements will increase in these circumstances.

The Power System Controller will ensure regulating reserves are such that normal load changes and output variation in unregulated generation (embedded or registered) do not result in frequency deviations outside the normal operating frequency band.

Regional Application

Darwin/Katherine

Minimum Regional Figure of 5 MW

System Load Rate of Change defined as change in system load over 30 minutes.

Tennant Creek

Minimum Regional Figure of 0.5 MW

System Load Rate of Change defined as change in system load over 10 minutes.

Alice Springs

Minimum Regional Figure of 2 MW

System Load Rate of Change defined as change in system load over 10 minutes.

7 Contingency Frequency Control Ancillary Service (FCAS) / Spinning Reserve

FCAS and Contingency Reserve are used interchangeably in this context.

Implementation Plan

The three regulated power systems in the Northern Territory; Darwin-Katherine, Alice Springs and Tennant Creek are to have their existing spinning reserve policies replaced with the Frequency Control Ancillary Service (FCAS). Until further notice the Spinning Reserve requirements outlined in this document will be in effect for each regulated system.

The algorithms for FCAS provision and system FCAS requirement will be implemented in a consistent manner across all regulated power systems. However, prior to announcement of a changeover date, specific requirements of the FCAS policy will be established with system participants such as the accreditation of machine FCAS provision or reference times for FCAS services.

When all systems are in place to implement FCAS policy within a regulated system, System Control will provide all system participants with formal advice of a changeover date by updating the Secure System Guidelines. The changeover date will be updated in the Secure System Guidelines a minimum of two weeks in advance. From the changeover date the regulated system will operate with FCAS requirements in place of Spinning Reserve requirements.

Frequency Control Ancillary Service (FCAS)

FCAS provides a means for the Power System to respond to some disruption resulting from an unexpected disconnection of generating units, items of transmission equipment or sudden loss of load. The FCAS policy will also account for the UFLS scheme in place at the time in determining the system requirements.

The principle of FCAS is as follows:

- Dispatch sufficient contingency raise (fast, slow and delayed) to prevent an under frequency load shed for the loss of any single machine (allow for impact of combined cycle) and return the frequency to a stable level (not fully to 50Hz) and maintain until other generation can be dispatched to return the system to a normal operating state.
- Dispatch sufficient contingency lower (fast, slow and delayed) to prevent an over frequency generator trip (full speed no load) for the loss of any load and return the frequency to a stable level (not fully to 50Hz) and maintain until the dispatch can be changed to return the system to a normal operating state.

FCAS is broken down into 3 different services: Fast, Slow and Delayed, each covering a different section of time following the event.

The reference times for each service are tabulated below. Currently this only applies to the Darwin-Katherine System. Alice Springs and Tennant Creek will require extensive review and analysis to generate similar requirements.

	Fast Reference Times	Slow Reference Times	Delayed Reference Times
Time A	0 – 2 Seconds	2 – 60 Seconds	60 – 300 Seconds
Time B	2 – 60 Seconds	60 – 300 Seconds	300 – 900 Seconds

FCAS provision is based on the following:

$$F_{fast} = \min \left\{ \begin{array}{l} \frac{2}{t_{reffast}} \int_{t_m}^{t_m+t_{reffast}} \Delta P_g dt \\ \frac{2}{(t_{refslow} - t_{reffast})} \int_{t_m+t_{reffast}}^{t_m+t_{refslow}} \Delta P_g dt \end{array} \right.$$

$$F_{slow} = \min \left\{ \begin{array}{l} \frac{2}{(t_{refslow} - t_{reffast})} \int_{t_m+t_{reffast}}^{t_m+t_{refslow}} \Delta P_g dt \\ \frac{2}{(t_{refdelayed} - t_{refslow})} \int_{t_m+t_{refslow}}^{t_m+t_{refdelayed}} \Delta P_g dt \end{array} \right.$$

$$F_{delayed} = \min \left\{ \begin{array}{l} \frac{2}{(t_{refdelayed} - t_{refslow})} \int_{t_m+t_{refslow}}^{t_m+t_{refdelayed}} \Delta P_g dt \\ \frac{1}{(t_{refdelayed})} \int_{t_m+t_{refslow}}^{t_m+3t_{refdelayed}} \Delta P_g dt \end{array} \right.$$

ΔP_g and ΔP_e are the FCAS providers' responses ignoring any inertial response.

The system requirements are calculated based on the following process and equations. Note the amount of delayed raise is similar to the requirement for slow raise.

Identify and Calculate Post Contingent System MVA and H:

$$\text{System MVA} - \sum \text{Remaining Online MVA}$$

$$\text{System H} - (\sum \text{Remaining Online MVAs}) / \text{System MVA}$$

Define:

ΔP_m (Contingency Size);

f_{min} and n_{min} (Lowest Frequency/Speed Change – Based on UFLS Scheme);

t_{ref} (Fast Reference Time – 2 Seconds); &

t_g (Time assumed for all governor actions – Declared at 4 Seconds)

Calculate:

ΔP_g (Calculated Governor Response); &

$$P_g = - \frac{\Delta P_m^2 t_g}{4Hn_{min}}$$

t_{min} (Time of Minimum Frequency)

$$t_{min} = \frac{\Delta P_m t_g}{\Delta P_g} + t_m$$

t_m is event time, and is assumed to be 0 Seconds unless stated otherwise.

Check t_{min} against t_{ref} and determine FCAS Fast and Slow requirements:

Case 1: $t_{min} < t_{ref}$

$$F_{fast} = \frac{2\Delta P_m}{t_{ref}} \left[t_{ref} - \frac{t_{min} - t_m}{2} \right]$$

$$F_{slow} = 2\Delta P_m$$

Case 2: $t_{min} > t_{ref}$

$$F_{fast} = -\frac{\Delta P_m^2 t_{ref}}{4Hn_{min}}$$

$$F_{slow} = \Delta P_m \left(1 - \frac{\Delta P_m t_{ref}}{4Hn_{min}} \right)$$

The provision of FCAS and determination of FCAS system requirement will be assessed by and approved at the discretion of the Power System Controller.

Based on the assessment of an engineering technology, the technology may be accredited with an inertia contribution, an FCAS raise/lower contribution or another determination as deemed appropriate by the Power System Controller. Refer to Section 5 (Inertia Ancillary Service) for Inertia accreditation and requirements.

At a minimum the combined amount of machine provided FCAS must be greater than the system requirement. By the nature of the calculations/requirements this will be spread across multiple machines.

The Power System Controller may vary the minimum amount of FCAS required to accommodate the perceived risk level to the power system or sub-system at the time. This may include specific machine/island and or region requirements.

Spinning Reserve

Spinning Reserve provides a means for the Power System to ensure that the power system can respond to some disruption resulting from an unexpected disconnection of generating units or items of transmission equipment.

At a generating unit level, Spinning Reserve is calculated as the difference between the current load and Base Capacity of a generator. The Power System Controller will assess non-generator sources of Spinning Reserve and accredit, to the extent appropriate, in accordance with the principles outlined in this document.

At a system level, Spinning Reserve is the sum of all individual generating unit Spinning Reserve amounts. Spinning Reserve must be dispatched across two or more generating machines and a minimum amount of Spinning Reserve must be maintained at all times.

The Power System Controller may vary the amount of Minimum Spinning Reserve and direct the allocation of unit Spinning Reserve, to accommodate the perceived risk level of the power system or sub-network at the time.

Regional Application

Darwin/Katherine

Minimum Spinning Reserve: 25 MW of Spinning Reserve at all times.

15 MW of the Spinning Reserve requirement is to come from Frame 6 machines at all times.

This is to be dispatched on at least two Frame 6 machines.

A node (i.e. [C4/5 Node], [C2/3 Node], [C1/7 Node]) can contribute a maximum of 7.5 MW of Frame 6 Spinning Reserve

Frame 6 Spinning Reserve must be provided by 2 or more nodes.

Changeover to FCAS: Date to be determined.
Minimum FCAS: As detailed in the equations above.

Tennant Creek

Minimum Spinning Reserve: 0.800 MW of Spinning Reserve at all times.
Changeover to FCAS: Date to be determined.
Minimum FCAS: This will undergo review to determine the application of the principles applied to the Darwin-Katherine System

Alice Springs

Minimum Spinning Reserve: the greater of:

- 8 MW (Day)
- 5 MW (Night)
- Largest Machine MW Output

Refer to document "Alice Springs System Security Dispatch Constraints".

Changeover to FCAS: Date to be determined.
Minimum FCAS: This will undergo review to determine the application of the principles applied to the Darwin-Katherine System

8 Determining adequate voltage levels for the System

System Voltage is a distributed phenomenon, and its limits are defined in various Acts, Regulations, Codes and Standards.

The Network Connection Technical Code requires that all plant be designed to operate with minimum and maximum steady state voltages to 90% and 110% of nominal design voltage respectively, unless specifically designed and approved. Generally, contestable customers are expected to design their plant to accept voltage levels of +/- 5% of nominal voltage.

The Network Connection Technical Code also defines:

- Maximum voltage perturbation for a routine switching step (excluding de-energising) +/- 3.7% nominal voltage before reactive control responses and
- Maximum voltage perturbation for an infrequent switching step (excluding de-energising) +/- 6% nominal voltage before reactive control responses.

System Voltage Reduction is a credible means of reducing load under emergency conditions, but has the impact that customers at feeder extremities may suffer out-of-standard limit voltages. Only the Power System Controller approves Voltage Reduction strategies.

Regional Application

Normal voltage control limits for all regulated voltage nodes regulated by OLTC transformers shall be +/-1.5% of a specifically defined nodal voltage value.

LDC (Line Drop Compensation) usually provides benefits for very long feeders with relatively large loads at the ends of the feeders. Typically, fixed value (no LDC) regulated voltage set-points are set slightly higher than nominal to allow for voltage drop at the ends of the feeders. The latter type is in most common use in PWC.

Control balance points are as follows:

Nominal voltage	Typical Voltage Setpoint	Tolerance
132kV	Not controlled by OLTC	+/- 10% nominal
66kV	67.6kV	+/- 10% nominal
22kV	22.5kV	+/-5% nominal
11kV	11.1kV	+/-5% nominal

9 Determining adequate Reactive Power Reserve for the System

There are nominal design voltage levels and tolerances defined within these SSG. The system voltage at each node and, corresponding reactive power requirements, are determined by power system local loading demands and the reactive impedance of the various sections of the power system.

Measures of adequate reactive power reserve include:

- voltage levels for the System meet Adequacy limits
- there is no ZSS OLTC transformer that has reached maximum or minimum tap and regulated voltage is within normal control deadbands
- voltage collapse situations are not imminent
- no generator is operating close to maximum or minimum excitation level and under automatic control
- Power Factor on ZSS Bus's are within normal ranges

Power System Controller will issue advice to all affected System Participants when:

(LORR1):

- Any OLTC transformer is operating at Top or Bottom tap and regulated voltage remaining outside normal control deadbands OR,
- any scheduled generation unit is operating within 5% of maximum or minimum excitation level and under automatic control OR,
- 2 scheduled generating units are operating under manual voltage control

(LORR2):

- Any system voltage controlled node operating outside of statutory voltage limits OR
- any system node operating outside of stable voltage control limits OR
- any generation unit operating at maximum or minimum excitation level and under automatic control OR
- 3 or more scheduled generating units operating under manual voltage control.

Power System Controller may initiate commensurate actions including Directions, load shedding, load transfer, or generation plant adjustments at any of these stages.

Regional Application

Darwin/Katherine

In addition to above, LORR1 will also be issued if the sum of in service reactive power from Capacitor Banks in the system is below 25 MVAR.

Tennant Creek

As described above

Alice Springs

As described above

10 Determining adequate frequency levels

The specification of frequency levels is to ensure frequency is held within adequate levels prior to and following a single contingent event. This principle is set out to establish a baseline frequency range for the coordination of frequency control measures such that the inertia, FCAS contingency service/Spinning Reserve respond to sudden supply/demand imbalance before frequency protection schemes (UFLS/OFGS) operate.

Normal Operating Frequency Band is the band system frequency is to be maintained within for normal load variation. This frequency control service is managed regulating reserve specified in Section 6 (Determining adequate Regulating Reserve).

Governor Deadband is the maximum frequency deviation before governor action is required to start. Governor action can start within the deadband, but governor action must start if the frequency is outside the specified deadband.

Active Frequency Control Deadband is the maximum frequency deviation required before the frequency is actively controlled by the generator dispatch control system. The generator dispatch control system must control frequency deviations outside the Active Frequency Control Deadband.

The Emergency Operating Frequency Band is the frequency band allowable after a single credible or protected contingency event has occurred and UFLS/OFGS, Contingency Lower/Raise (or Spinning Reserve) services have completed action to restore the system to a stable frequency. Emergency Operating Frequency Band is only allowable for a maximum of 30 minutes to allow for a change in generation dispatch. After 30 minutes of Emergency Operating Frequency Band, frequency shall be restored to the Normal Operating Frequency Band.

Cumulative frequency induced Time Error must be within +/- 15 seconds at all times, with no time correction action required if the error is within +/- 2 seconds.

The Power System Controller may exercise frequency reduction strategies outside of the frequency levels specified above as and when required to ensure supply is maintained. A circumstance that may require such action would be due to an imminent shortfall in fuel supply.

Normal Operating Frequency Band is: DEFINED BY REGION.

Governor Deadband is: 50.00 +/- 0.025 hz.

Active Frequency Control Deadband is: 50.00 +/- 0.05 hz.

Emergency Operating Frequency Band is: 50.00 +/- 0.5 hz.

Regional Application

Darwin/Katherine

Normal Operating Frequency Band is: 50.00 +/- 0.2 hz.

Tennant Creek

Normal Operating Frequency Band is: 50.00 +/- 0.4 hz.

Alice Springs

Normal Operating Frequency Band is: 50.00 +/- 0.2 hz.

11 Determining adequate energy for the System

Energy supply adequacy is generally measured by the quantity and quality of fuel available for use at each power station.

An Alert level is defined as a case where available fuel supply falls below that quantity or quality required for operation at forecast load levels for the next 8 hours.

Due to the complexity of arrangements required to deal with shortfalls in fuel supply, or departures from quality standards, it is necessary that there be a Preliminary Alert level where any contingency in the delivery and or storage systems for fuel supply has the potential to result in an Alert level being reached in the next 18 hours.

Generators shall immediately notify the Power System Controller when a Preliminary Alert or Alert level is reached.

Where more than one fuel source and/or fuel type is available each source/type should be monitored and subject to the Alert level process.

When the PSC has been notified of a fuel adequacy alert the PSC may then deem that the partial or complete loss of the power station is a credible contingency. The PSC will communicate with relevant parties and may take measures to mitigate this risk; these measures may include suspension of Market operations or making Directions as provided for by the SCTC.

Application

Refer to document "Secure System Guidelines Generation Specifics".

12 Determining capacity of transmission assets

The Network Operator is responsible for determining ratings of the transmission assets. The Network Operator shall advise the Power System Controller of these ratings. The Network Operator shall provide ratings for transmission equipment in the manner specified by the Power System Controller:

- A minimum of 2 weeks prior to commissioning of any transmission equipment,
- immediately upon any assessed change to the rating of an asset
- whenever requested by the Power System Controller within an agreed timeframe

The Power System Controller shall utilise any limit provided by the Network Operator for a given asset as required for normal operation, planned maintenance or otherwise.

The Network Operator shall provide ratings according to the following terms which are used to determine the capacity of transmission assets:

Transformer Rating: The Continuous and Emergency Rating provided by Power Network (Asset Management) associated with the transformer.

Line Rating: The Continuous and Emergency Rating provided by Power Network (Asset Management) associated with the Transmission Line.

Bay Rating: The Continuous and Emergency Rating provided by Power Network associated with the related assets in the bay.

Relay Load Limit: The Continuous and Emergency Rating provided by Power Network (Test and Protection).

Normal Continuous Ratings: Continuous Rating with no time restrictions.

Emergency Rating: Emergency Rating with an associated time restriction provided.

Short Term Relay Load Limit 1 & 2: The exceedance of the MVA/Amps Limits provided for the specified time duration will trip the plant.

Effective Continuous Rating: The most conservative Continuous Rating between the Transformer Rating, Bay Rating and the Relay Load Limit.

If there is a rating or restriction on plant that does not fit in the terminology provided above, the Network Operator is still obligated to advise the Power System Controller.

Application

Refer to document "Secure System Guidelines Network Specifics".

13 Determining fault level requirements

The Network Operator shall advise the Power System Controller of:

- the fault level rating of all transmission equipment down to feeder circuit breaker equipment at zone substations. This may include the fault level rating of distribution equipment as seen at the zone substation.
- any system configuration that may result in prospective fault levels above fault level rating of transmission, or distribution equipment.
- any system configuration that may result in prospective fault levels below the requirement for protection to operate as designed.

The determination of whether equipment or configuration which may breach fault level requirements shall include (but is not limited to) an assessment of the following:

- Possible configuration of distribution equipment.
- Possible network configurations (including during system restart).
- Possible generation dispatches (including dispatch for minimum/maximum demand or other worst case).
- Any other factor likely to contribute or detract from the fault level rating or minimum required fault level of switchgear.

The Network Operator will work in conjunction with the Power System Controller to develop operational configurations to mitigate risk of prospective fault levels exceeding ratings or below the requirement for protection to operate as designed.

The Network Operator shall assess fault levels for any relevant change to distribution or transmission equipment. This may include (but is not limited to) the following:

- Commissioning of equipment
- De-commissioning of equipment
- Protection setting modification
- Significant change in network or distribution configuration.

Specific requirements for fault level capacity are outlined in the Network Connection Technical Code.

14 System stability

Any equipment identified as causing a Voltage instability or Frequency instability event may be disconnected as directed by the Power System Controller or directed to undertake rectification actions to ensure such an event is not caused in future.

Definition:

The AEMO Power System Stability Guidelines definitions of stability are used in this section.

Voltage stability is the ability of the power system to maintain or recover voltage magnitudes to acceptable levels following a contingency event.

Instability would result in voltage magnitudes in part of the power system exhibiting an uncontrolled sustained increase or decrease over time (a "run-away" condition) or sustained or undamped oscillatory behaviour. Voltage instability can occur rapidly (over seconds) or slowly (over minutes).

Frequency stability is the ability of a power system to maintain acceptable frequency following a contingency event. Typically, that contingency event causes an unbalance between generation and load in the power system. It depends on the ability of the power system to maintain or restore equilibrium between generation and load and recover the power system frequency to acceptable levels. Refer to Section 10 (Determining adequate frequency levels) for acceptable levels.

Instability results in an uncontrolled sustained increase or decrease over time (a "run-away" condition) or sustained undamped oscillatory behaviour.

Determination:

System Stability will be determined based on the specific requirements obtained from the Network Connection Technical Code.

15 Adoption of Reliability Criteria for networks

The Power System Controller adopts the following reliability criterion for network primary plant. Such criterion will be employed for maintenance planning and coordination:

Equipment that cannot be operated to 'N-1 Criteria' due to means of connection, are operated to 'N Criteria'. E.g. distribution feeders.

Equipment could be operated according to N-1 Criteria are classified into 3 groups:

- Non-Credible (Operated to 'N Criteria')
- Protected (Operated to prevent system black)
- Credible (Operated to 'N-1 Criteria')

Under normal conditions the following are deemed to be non-credible contingencies:

- Bus faults
- Three phase faults

Under normal conditions, the following contingencies are classified as protected:

- Loss of the 132kV Transmission line south of Channel Island – Only to the extent that the southern region may go black, impact to the remainder of the Darwin-Katherine System is managed as a credible contingency and should not result in UFLS.
- 132kV Channel Island Nodes are operated as protected events. Outage planning and dispatch is managed to prevent System Black, however UFLS may occur.
- Loss of multiple transmission lines due to shared towers.

Fuel Supply contingencies are handled under Section 11(Determining adequate energy for the System).

The remainder of contingency events are considered credible.

Under planned or forced outage contingencies, the Power System Controller may reclassify contingencies.

Protected events and credible contingencies:

The Power System is operated under the principle that credible contingencies wherever possible shall not result in involuntary load shedding. There are exceptions for planned outages where risk of involuntary load shedding is unavoidable, however in these cases risk analysis and mitigation is undertaken. This requires system constraints in place and scheduling of planned generation and network outages to ensure reliability criteria are at acceptable levels.

There are single contingency events that are plausible to occur, however the impact of enforcing constraints to prevent involuntary load shedding for these contingencies are impractical to apply on a permanent basis. These contingency events are classified as protected events such that constraints and scheduling of planned generation and network outages will only be enforced to ensure Power System Security is maintained to the extent required to avoid System Black. These events may be reclassified as credible if the Power System Controller deems necessary due to an identified increase in risk.

For the contingency of a radial line, the resultant impact to the wider system is considered and treated as credible (constraints are enforced to prevent UFLS/OFGS). The local impact (Loads/generation) on the radial is managed under 'N criteria' for reliability, unless determined otherwise by the Power System Controller.

16 Power system outage planning

In approving the disconnection of power system elements for scheduled and planned, generation or transmission outages, the Power System Controller will determine the specific requirements necessary to maintain the security and reliability of the power system for the duration of the outage. The requirements to maintain security and reliability will extend to cover the occurrence of credible contingency events that have been identified or reclassified as part of the assessment.

Generation outage approval

Planned generation outages, or planned transmission outages which place a constraint on generation, will be assessed based on reliability of the power system under a credible or protected contingency event. The Lack of Standby Generation criteria defined in Section 4 (Determining Standby Reserve) of the Secure System Guidelines will apply. Planned outages which trigger a breach of the LORR1 or LOS2 margin will not be granted approval. Planned outages which trigger a breach of the LOS1 margin will be assessed on a case by case basis and may be approved under the majority of circumstances, however a LOS1 condition will be declared.

When generation units are undergoing online testing, the Power System Controller will define the required spinning reserve or FCAS requirements necessary to facilitate the testing while maintaining power system security and reliability.

Network outage approval

At all times, the power system must operate within its defined technical envelope and maintain system reliability. The ratings of power system elements supplied by the System Participant will be utilised to determine the technical envelope of the power system. Planned outages which trigger a breach of the LORR1 margin will not be granted approval.

In circumstances where planned network outages pose heightened risk to system reliability due to extended recall time, the System Controller may require a System Participant to submit an appropriate emergency restoration plan. Approval of such planned outages will be conditional on the acceptance of the emergency restoration plan.

Timeframe for Outage Planning

Refer to the SCTC for specific details associated with Annual Plant Maintenance Forecasts and Application for Planned Outages.

Any Application for Planned Outage less than the duration specified in the SCTC must provide sufficient justification for the lack of notice and requires approval by the Power System Controller.

17 Determining adequate protection integrity

When a planned outage of a protection scheme for a transmission element is requested, the Power System Controller will assess the risk to system security and make a determination on the most appropriate action, be it to leave the transmission element in service for a limited duration, to take the transmission element out of service, and/or to put temporary protection equipment or measures in place.

When a planned outage is scheduled for one of two independent protection schemes on a transmission element, the duration shall be kept to a minimum, and not exceed eight hours, unless the Power System Controller has granted prior approval.

Protection schemes will only be considered independent if appropriate redundancy and separation of equipment exists, each protection system is capable of performing the same fault detection / isolation functionality, and each protection system has the facility to alert the Power System Controller via SCADA in the event of equipment failure. The requirement for separation of protection equipment extends to secondary equipment including, but not limited to, CT and VT secondaries, auxiliary supplies, cabling and wiring, circuit breaker trip coils, and battery and intertripping arrangements.

In accordance with the SCTC, a System Participant must advise the Power System Controller immediately whenever the System Participant becomes aware that any protection scheme equipment is not operating correctly. The System Participant is responsible for ensuring that the Power System Controller is kept informed while any such scheme is promptly and diligently repaired or replaced. The Power System Controller shall make a determination regarding the continued serviceability of affected HV equipment, and initiate any additional operational actions to mitigate the perceived risks.

18 Generator and Load Registration Thresholds

The Power System Controller must be aware of any material step change in load or change in output of embedded generation to ensure supply to all customers is within the technical envelope and appropriate generation dispatched. As such thresholds for registration of generation (embedded or otherwise) and switchable loads are specified by region.

As part of the Network Connection process, a generator or load exceeding the region specific threshold shall be registered with the Power System Controller prior to connection.

The System Controller may impose various connection requirements for a registered generator or load including, but not limited to:

- High speed data recording
- Remote control capabilities
- Inter-trip or other protection schemes
- Operational communication requirements
- Ramp rates

These connection requirements will be determined on a case by case basis.

The Power System Controller may require a registered generator or load to exercise any of the following actions (the list is not exhaustive) for system security:

- Adjust output/load
- Voltage Control
- Frequency Control
- Disconnect

Regional Application

Darwin/Katherine

Registration Threshold:	Connection in possible radial islands at Katherine, Pine Creek, Batchelor, or Manton Zone Substations: 200 kW
	Connection in possible radial islands at Archer, Humpty Doo, Marrakai, Mary River, Palmerston, Strangways, Weddell or Wishart Zone Substations: 500 kW
	Elsewhere within Darwin/Katherine System: 1000 kW

Tennant Creek

Registration Threshold: 30 kW

Alice Springs

Registration Threshold: 200 kW

19 Special Control and Protection Requirements or Schemes

The Power System Controller has oversight of the following control and protection schemes to cater for credible system security contingencies such that supply is maintained or returned to within the technical envelope:

DKTS System Status Signalling Scheme.

The Darwin Katherine Transmission System (DKTS) has connections to generation facilities at Pine Creek Power Station (PCPS) and Katherine Power Station (KPS).

In normal circumstances, if these facilities are on-line, PCPS and/or KPS will be under AGC control and their governors in Droop mode.

However, if any of the Lines, Busbars or Transformers become isolated under protection action or deliberate switching it is necessary to have governor and excitation modes switch to Isochronous (Isoch) and voltage control within a matter of seconds in order that frequency and voltage control be maintained. Table 1 shows Scheme responses to potential events:

DKTS element isolated	PCPS on-line	PCPS control mode	KPS control mode (if on-line)
CI-MT	Y	Isoch/Voltage	No change
CI-MT	N	No Change	Isoch/Voltage
MT-BA-PK	Y	Isoch/Voltage	No change
MT-BA-PK	N	No Change	Isoch/Voltage
PK-KA	Y	No Change	Isoch/Voltage
PK-KA	N	No Change	Isoch/Voltage

Further detail:

Connectivity is based on circuit breaker status, taken from the Gould AR PLC at MT, PK and KA. Circuit breaker status at CI is taken from the 132CI210 Circuit Breaker C60 relay. So a circuit breaker isolated for maintenance, and closed as part of the work, will cause a status change. The scheme was designed to deal with faults; if the outage is planned then part of the planning should be to manually select Isoch at the appropriate site for the duration of the work after the initial switching.

Signalling is carried out by microwave communications which are duplicated and pilot wire communications between PK and PC, which are not.

Both PCPS and KPS have separate and independent "Local Isoch" functions whereby circuit elements local to the power stations are monitored and also cause a change to Isoch mode.

Power Station Anti-Islanding Requirements

A Power Station that is not capable of maintaining appropriate Frequency and Voltage Limits while not operating in parallel with one or more other Power Stations connected to the Power System, shall have control/protection systems in place to immediately disconnect from the Power System at the relevant Connection Point, if that parallel connection is interrupted.

Under-Frequency Load Shedding Scheme.

Under the terms of the SCTC a UFLS scheme shall be implemented to ensure that where other provisions of the Secure System Guidelines fail to maintain frequency within the appropriate

Limits appropriate Circuits/Load will be disconnected to the extent, and within the time required, that will return the Power System to a Satisfactory State.

Under normal operating conditions at least 75% of all load in each region is to be selected for UFLS.

Refer to document "Under Frequency Load Shed Schedule".

Over-Frequency Generator Shedding Requirements.

Over-Frequency Generator Shedding (OFGS) may be in place where other provisions of the Secure System Guidelines fail to maintain frequency within the appropriate limits appropriate generators will be disconnected to the extent, and within the time required, that will return the Power System to a Satisfactory State.

There are no current or planned OFGS schemes in place as the configuration and operation of the three regulated systems is such that the above requirements are met by generator protection. Within each region the generator over frequency protection settings shall be unique and provided to the Power System Controller. The System Controller may require changes made to over frequency protection settings of any generating unit and the participant will ensure these settings are changed promptly.

Refer to document "Secure System Guidelines Generation Specifics".

Embedded Generation Anti-Islanding requirements.

All Embedded Generation Plant (of any type/technology) that is permanently or occasionally connected in parallel with the Power System, shall have control/protection systems in place to prevent the possibility of exporting power into the Power System, unless that export is:

- in parallel with Power System source(s), and,
- explicitly permitted by a Connection Agreement, and, on each and every occasion of such export, by explicit permission from System Control.

Embedded Generation Anti-Paralleling requirements.

Where an Embedded Generation plant has multiple Connection Points to the Power System, control/protection systems shall be in place that prevent a parallel connection between one or more Connection Points, unless explicitly permitted by a Connection Agreement, and, on each and every occasion of such parallel, by explicit permission from System Control.

Power System Islanding Requirements

Depending on the topology and configuration of a Power System there may exist points at which connections may be opened in order that autonomous generation and load areas be formed, usually consequent to a major system wide disturbance, with the aim being to facilitate preventing a System Black event. Whilst not implemented as of 2016 this is a provision that may in future be implemented if feasible.

20 Black Start and System Black Restart procedures

The SCTC requires that each Generation site capable of Black Start shall submit to the Power System Controller a procedure to start generation plant and prepare to take load when connected to the power system. To maintain the effectiveness of Black Start procedures they must be regularly audited, updated and resubmitted. The Power System Controller shall from time to time require that Black Start procedures be tested in a manner that will be agreed by the parties.

The SCTC requires that the Power System Controller develop a Black System Restart procedure. The guiding principles of the Black System Restart are:

1. Safety of public and personnel.
2. Integrity of Power System Plant and Equipment
3. Restoration of normal supply whilst maintaining conformance with the provisions of relevant Technical Codes and Secure System Guidelines.

In determining the priority for restoration of normal supply the guiding principles of the Black System Restart are:

1. Essential to any System Black Restart is the early identification of the cause of the System Black, in order that any causal condition is avoided in the process of Black System Restart.
2. The connection of a generation site that has completed its' Black Start to an appropriate type of load.
3. The interconnection of generation sites and the restarting of generation sites without black start capability.
4. The continued connection of load to the power system with priority given to Hospitals and facilities necessary to maintain the health and security of the public. Priorities may also be set as part of Disaster response processes of PWC and/or the NT Government.

Refer to document "Regulated Power System – Black System Procedures", or station specific black start procedures.

21 Records

This policy is to be stored in:

- The System Control Operational Document Facility accessed through the intranet web site for System Control.
- Power and Water's Records Management System (HPE) in accordance with the Corporate Document and Record Control Procedure.
- Records are to be retrievable through Power and Water's Record Management System (HPE).

Upon specific request to the Power System Controller a record may be made available in part or full where appropriate.

References

References			
No.	Document	Date	Location/HPE No.
1	System Control Technical Code	May 2015	Published Online
2	Network Technical Code and Network Planning Criteria	Dec 2013	Published Online
3	Secure System Guidelines Generation Specifics		
4	Secure System Guidelines Network Specifics		
5	Alice Springs System Security Dispatch Constraints	05/08/2016	D2016/316637
6	Under Frequency Load Shedding Schedule	29/11/2016	BDOC2015/135
7	Regulated Power System – Black System Procedures	03/06/2014	BDOC2013/405
8	Channel Island Power Station Black Start	10/03/2017	TGEN DOC
9	Weddell Power Station Black Start	08-03-2017	TGEN DOC
10	Katherine Power Station Automated Black Start Procedure	13/03/2017	TGEN DOC
11	Ron Goodin Power Station Black Start		TGEN DOC
12	Owen Springs Power Station Black Start		TGEN DOC
13	Tennant Creek Power Station Black Start		TGEN DOC

22 Document History

As indicated in the cover page, the nominal review period of the Secure System Guidelines is one year, however it shall be reviewed earlier if a substantial change or addition is required.

Document History				
Revision	Date	Status/Change	Updated by	Remarks
2.6	Aug 2008	Issued	Ken Lewis	Issued
3	Dec 2016	Reviewed for consultation	Power System Controller	Reviewed. Substantive changes throughout. Ready for consultation.