

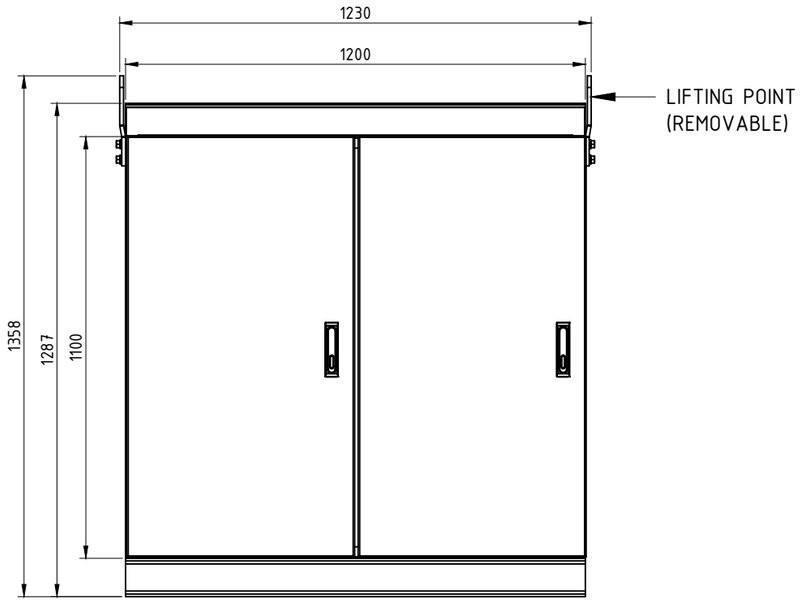



FRONT VIEW

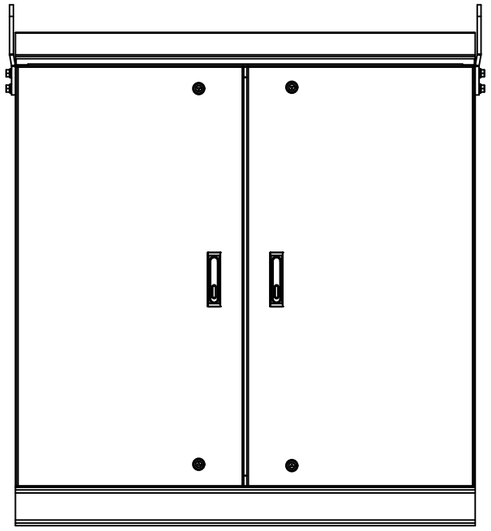


REAR VIEW

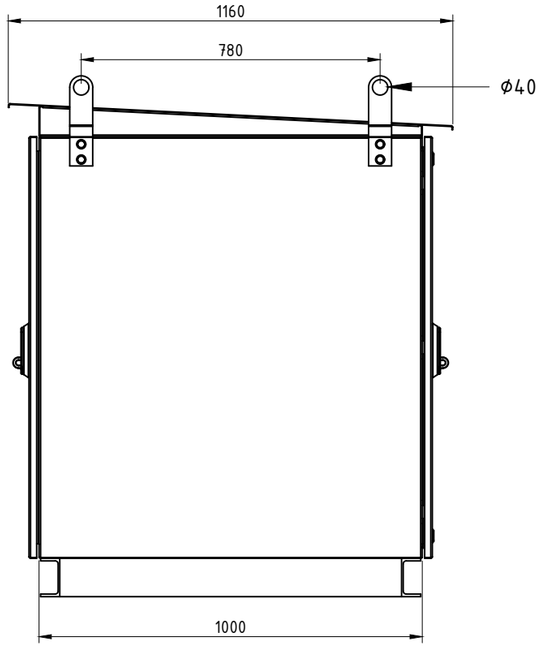


SIDE VIEW

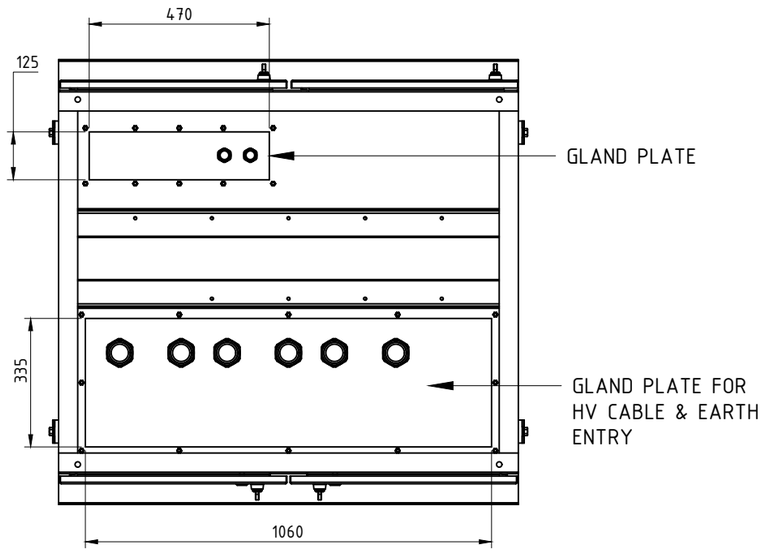

BOTTOM VIEW

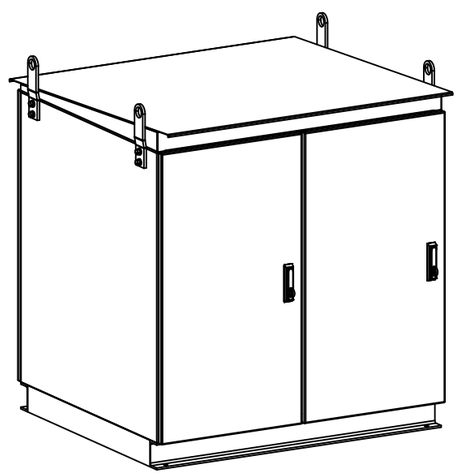

ITEM NUMBER : TBA

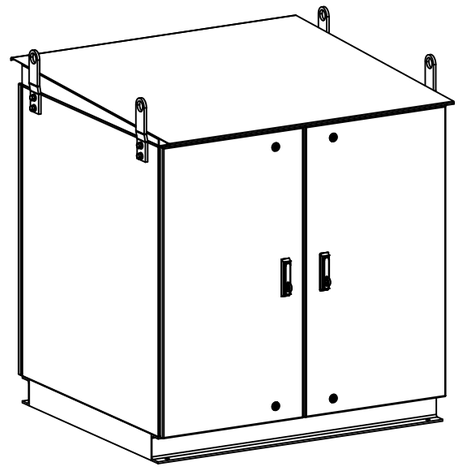

MASS	500 kg
MATERIAL	STAINLESS STEEL 304 ENCLOSURE FULLY WELDED PFC100 STEEL BASE
PLATING	ENCLOSURE - POWDER COATED TO APO GREY BASE - HOT DIPPED GALVANISED TO AS/NZS 4680:2006
SURFACE FINISH	RIPPLE

NO	DESCRIPTION	DRN	DATE	CKD	APPD
0	ISSUED FOR CONSTRUCTION	P.G.	OCT'26	B.C.	B.V.

AMENDMENTS

PowerWater
NORTHERN TERRITORY


DES	B.VANDERSTELT
DRN	P.GUNA
CKD	B.CHEUNG
APPD	B.VANDERSTELT
SCALE	NTS
ISSUED	OCT'26
ALL DIM. IN mm	
DRAFTING STANDARD TO A.S.1100	

POWER STANDARD DRAWING

SWITCHGEAR, NOJA GMK1000 3 PHASE GROUND MOUNT RECLOSER GENERAL ARRANGEMENT & COMMUNICATIONS HARDWARE
SHEET 1 OF 3


A3 | DRAWING NUMBER S02-01-04-31_1 | 0 AMDT

CAD PRODUCT - DO NOT AMEND MANUALLY

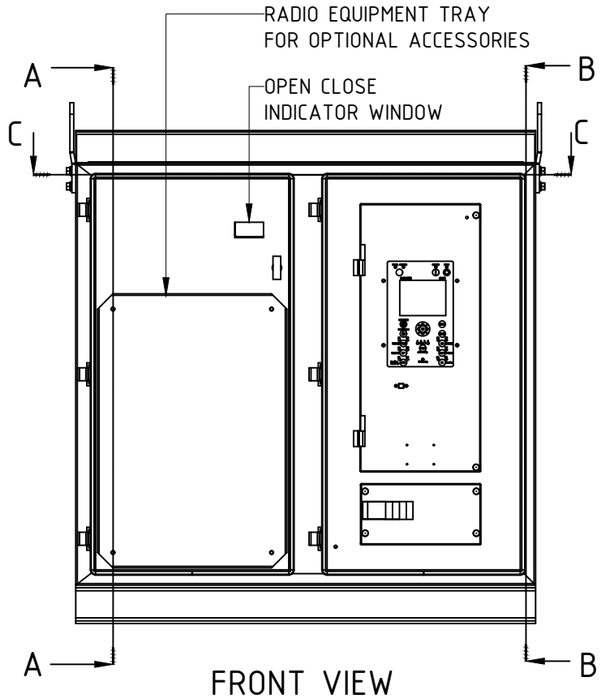

FRONT VIEW


(DOORS NOT SHOWN)

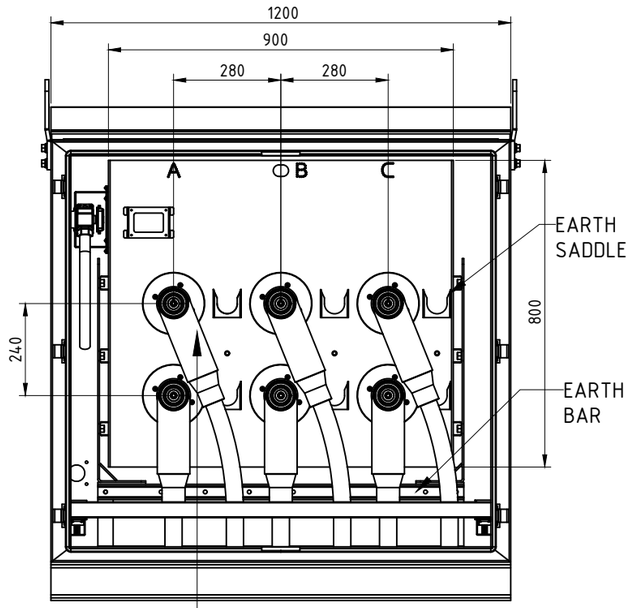


DEAD BREAK ELBOWS & CABLES NOT INCLUDED.
SHOWN FOR ILLUSTRATION PURPOSE ONLY
PLEASE REFER VIEW A FOR ACTUAL PRODUCT

REAR VIEW


(DOORS & MULLION NOT SHOWN)

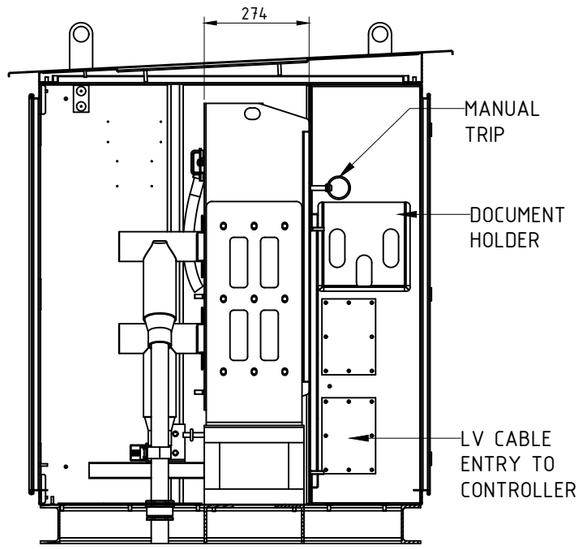


SECTION: A-A

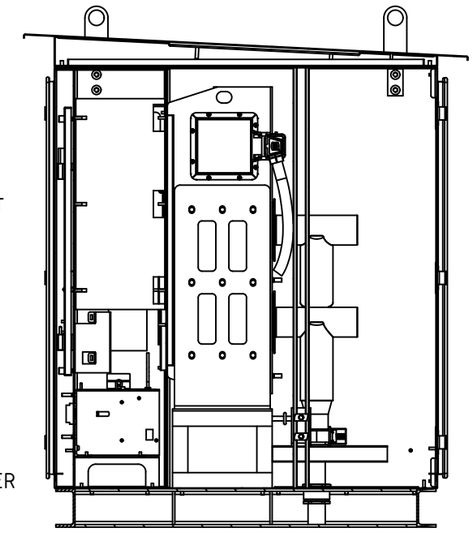


SECTION: C-C

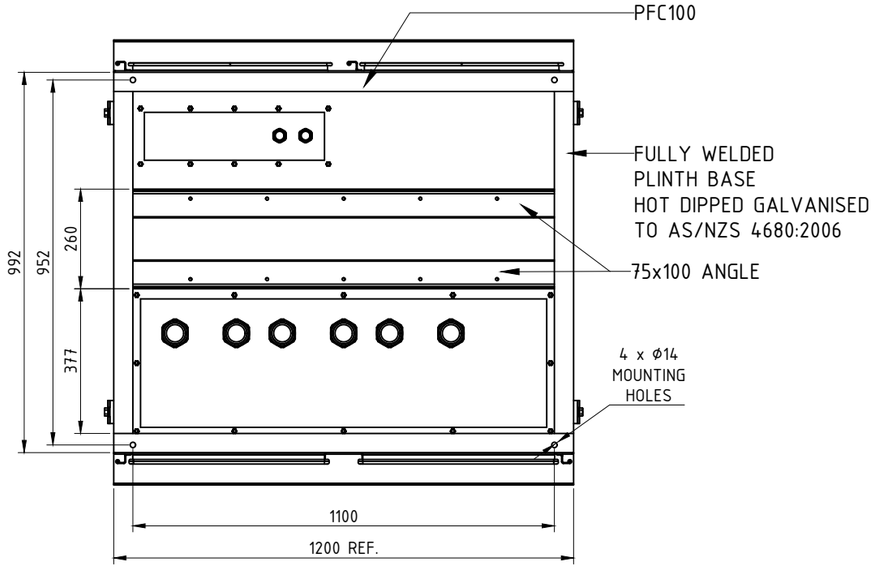

MOUNTING DETAILS

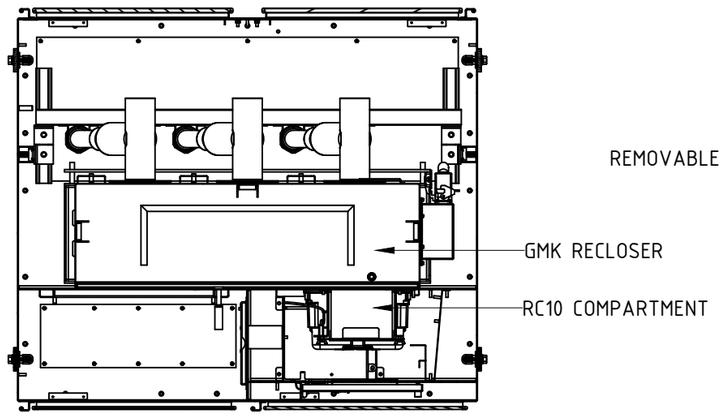

SECTION: C-C

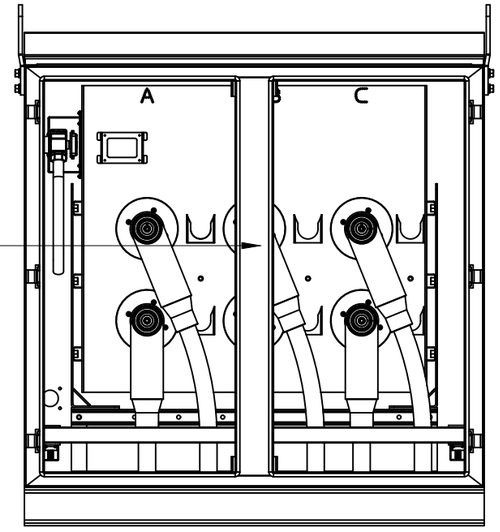

VIEW: A

REAR VIEW
(DOORS NOT SHOWN)

NO	DESCRIPTION	DRN	DATE	CKD	APPD
0	ISSUED FOR CONSTRUCTION	P.G.	OCT'26	B.C.	B.V.

AMENDMENTS

PowerWater
NORTHERN TERRITORY

DES	B.VANDERSTELT
DRN	P.GUNA
CKD	B.CHEUNG
APPD	B.VANDERSTELT
SCALE	NTS
ISSUED	OCT'26
ALL DIM. IN mm	

POWER STANDARD DRAWING

SWITCHGEAR, NOJA GMK1000 3 PHASE GROUND MOUNT RECLOSER GENERAL ARRANGEMENT & COMMUNICATIONS HARDWARE
SHEET 2 OF 3

A3 | DRAWING NUMBER S02-01-04-31_2 | 0 AMDT

DRAFTING STANDARD TO A.S.1100 | CAD PRODUCT - DO NOT AMEND MANUALLY

MATERIAL SCHEDULE

THE FOLLOW IS THE COMPLETE LIST OF PARTS REQUIRED FOR THE INSTALLATION OF A GCR RECLOSER.

NAME	QTY	SUPPLIER	PART NO	INSTALLED BY
CYBERTECH MODEM	1	CSE CROSSCOMM	2155X	PWC IN WORKSHOP
DIPOLE ANTENNA (DEPENDING ON INSTALL REQUIREMENTS)	1	CSE CROSSCOMM	CSM700-N	CONTRACTOR ON SITE
MIRROR MOUNT BRACKET	1	CSE CROSSCOMM	MM-2	CONTRACTOR ON SITE
COAXIAL CABLE	10m	CSE CROSSCOMM	CNT-400	CONTRACTOR ON SITE
N-MALE CLAMP-TYPE CONNECTOR	3	CSE CROSSCOMM	N-207	PWC ON SITE
SMA MALE TO N-FEMALE FLY LEAD	1	MAKE IN HOUSE	-	PWC IN WORKSHOP
SCOTCH 23 RUBBER TAPE	1	CSE CROSSCOMM	-	CONTRACTOR ON SITE
SCOTCH 33+ PVC TAPE	1	CSE CROSSCOMM	-	CONTRACTOR ON SITE
3mm RED/ BLACK DC POWER CABLE	5m	CSE CROSSCOMM	-	PWC IN WORKSHOP
J-POLE	1	MM ELECTRICAL	HILFB603004	CONTRACTOR ON SITE
20mm STEEL CONDUIT	10m	MM ELECTRICAL	RATRT-2030-B	CONTRACTOR ON SITE
CONDUIT FITTINGS	2	MM ELECTRICAL	RATRTF-20	CONTRACTOR ON SITE
FLANGE NUT	1	MM ELECTRICAL	ALCPLN20	PWC IN WORKSHOP
EARTH TAG	1	MM ELECTRICAL	ALCET20	PWC IN WORKSHOP
20mm SADDLE	10	MM ELECTRICAL	CLIPSAL 180/20	CONTRACTOR ON SITE
HOSE CLAMPS	2	NORMIST (DARWIN BOLT SUPPLIES)	9064-HAS028P	CONTRACTOR ON SITE
SURGE ARRESTOR	1	NOVARIS	CN-FF-230-3	PWC IN WORKSHOP

NO	DESCRIPTION	DRN	DATE	CKD	APPD
0	ISSUED FOR CONSTRUCTION	P.G.	OCT'26	B.C.	B.V.

AMENDMENTS

PowerWater
NORTHERN TERRITORY

DES	B.VANDERSTELT
DRN	P.GUNA
CKD	B.CHEUNG
APPD	B.VANDERSTELT
SCALE	NTS
ISSUED	OCT'26
ALL DIM. IN mm	
DRAFTING STANDARD TO A.S.1100	

POWER STANDARD DRAWING

SWITCHGEAR, NOJA GMK1000 3 PHASE GROUND MOUNT RECLOSER GENERAL ARRANGEMENT & COMMUNICATIONS HARDWARE
SHEET 3 OF 3

A3

DRAWING NUMBER S02-01-04-31_3

CAD PRODUCT - DO NOT AMEND MANUALLY

0
AMDT