


XLPE CABLE	CONDUIT SIZE
UP TO 5 SINGLE CORE 120mm	80mm
UP TO 5 SINGLE CORE 240mm	100mm

NOTES:

1. THE OPEN ENDS OF ALL CONDUITS SHALL HAVE THE LAST 50mm FILLED WITH EXPANDING FOAM.
2. ENSURE CABLE DESTINATION TAGS ARE PLACED ON THE CABLE ABOVE THE CABLE PROTECTION CHANNEL AT EACH CABLE TERMINATION POLE.
3. HEAT SHRINK COLOURED CODED PHASE ID ON EACH CABLE BELOW THE CABLE TERMINATION POINT.
4. CABLE PROTECTION CHANNEL SHALL BE SPOT WELDED TO THE POLE AS SHOWN IN S01-2-4-12.

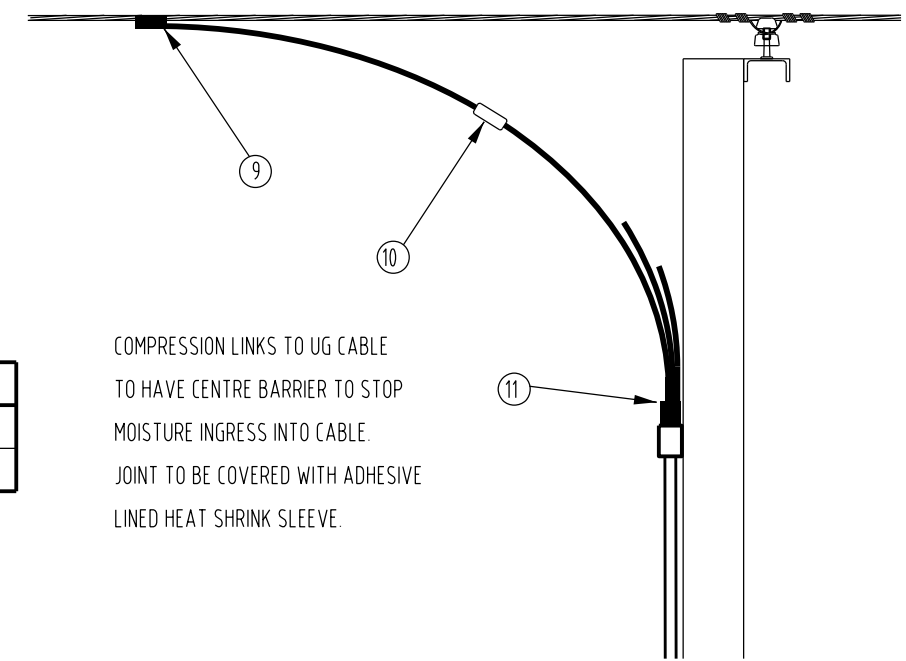

QTY	TAG NO	DESCRIPTION	DRG NO	ITEM NUMBER
AR	13	ORANGE HD CONDUIT 100MM DIAMETER	-	3947
AR	12	POLYMERIC CABLE COVER	S02-1-8-06	-
1	11	LV MOULDED GLOVE	-	-
4	10	COMPRESSION LINK TO SUIT CABLE	-	-
4	9	CLAMP PARALLEL GROOVE AL.	S01-1-4-25	-
AR	8	CONDUIT PVC GREY	-	-
1	7	POLE LINE	-	-
AR	6	CONDUCTOR ALL ALUMINIUM	-	-
1	5	PROTECTION CHANNEL	S01-1-4-30	-
4	4	SADDLE CONDUIT STEEL	-	-
3	3	LV ISOLATING SWITCH	S01-1-6-01	-
1	2	LV CABLE TERMINATION X-ARM	-	-
5	1	LV PIN INSULATOR ASSEMBLY	S01-2-1-03	-

DRG NO	DESCRIPTION	NO	DESCRIPTION	DRN	DATE	CKD	APPD
x	x	8	ROAD AND PROPERTY SIDE LABEL ADDED	C.C.	OCT'18	B.V.	B.V.
		7	NOTES ADDED	A.T.	MAY'13	B.C.	B.C.
		6	CONDUIT DATA UPDATED SAND PIT, ITEMS 12 AND 13 ADDED	A.T.	OCT'11	B.C.	S.C.
		5	CROSS ARM REFERENCES ADDED, CONDUIT DATA UPDATED	C.C.	MAR'11	A.T.	S.C.
ASSOCIATED DRAWINGS		AMENDMENTS					



DES	J.HASSENAN	POWER STANDARD DRAWING		
DRN	C.HUNTER	CABLE TERMINATION		
CKD	D.HENDERSON	LV - UG/OH		
APPD	F.EVA	XLPE		
SCALE	AS SHOWN	A3	DRAWING NUMBER	S01-2-4-02
ISSUED	JUNE 1979			
ALL DIM. IN mm				
DRAFTING STANDARD TO A.S.1100		CAD PRODUCT - DO NOT AMEND MANUALLY		

