


- NOTES
1. CABLE COVER TO FULLY COMPLY WITH AS4702
 2. MIN WIDTH OF COVER STRIP TO BE 150mm AND THICKNESS OF 5mm IN ACCORDANCE WITH AS4702
 3. TO BE PLACED AT A MAXIMUM HEIGHT OF 150mm ABOVE CABLES
 4. COVER STRIPS TO OVERLAP 40mm MIN
 5. REFER S02-2-6-01, 02, 03 FOR TRENCHING DETAILS

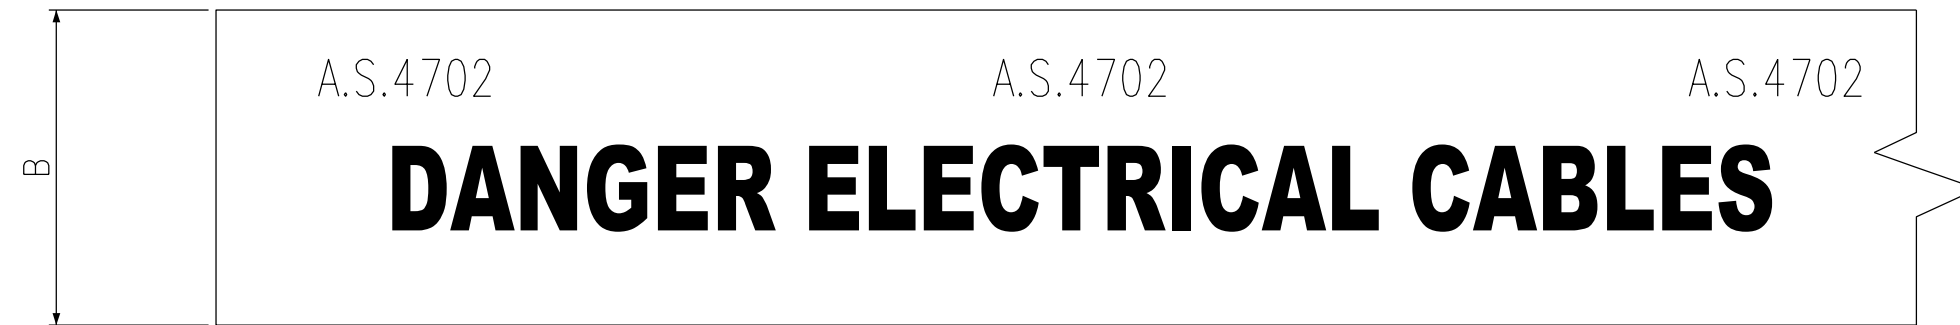

ITEM	STOCK CODE	DIM 'B'
1	413386	150mm
2	413387	200mm
3	500716	300mm

						DES	A.TALYOR	POWER STANDARD DRAWING			
						DRN	C.COPPINS	SIGNS COVER CABLE PROTECTION			
						CKD	A.TALYOR				
						APPD	A.TALYOR				
						SCALE	1:5				
						ISSUED	NOV'10	A3	DRAWING NUMBER	S02-1-8-06	AMDT
						ALL DIM. IN	mm				
						DRAFTING STANDARD TO AS.1100			CAD PRODUCT - DO NOT AMEND MANUALLY		
12	ITEM 3 STOCK CODE & NOTE 5 ADDED	K.T.	APR'16	I.B.	B.C.						
11	STOCK CODES ADDED	A.T.	JUL'11	B.N.	S.C.						
10	PVC COVER REPLACED WITH POLYMERIC	C.C.	APR'11	A.T.	S.C.						
9	NOTES UPDATED, REDRAWN IN CAD	C.C.	NOV'10	A.T.	S.C.						
	AMENDMENTS	NO	DESCRIPTION	DRN	DATE						CKD