



ITEM 5 STOCK CODE 501207
EXIT STRAIGHT AHEAD

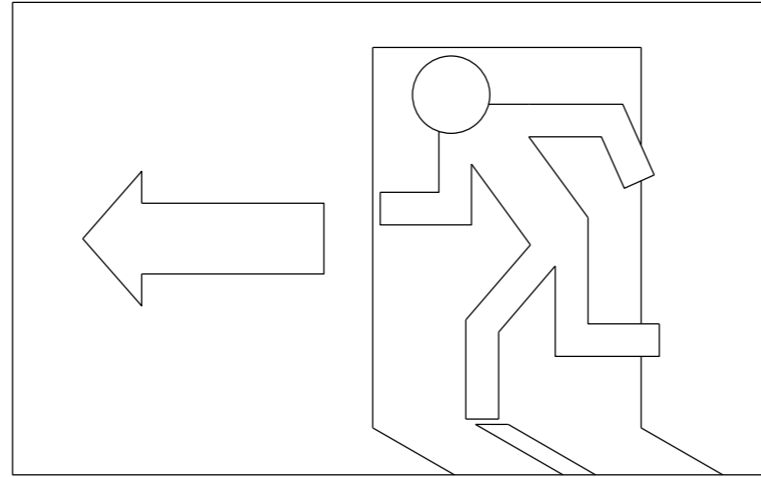

ITEM 6 STOCK CODE 501206
EXIT TO THE LEFT

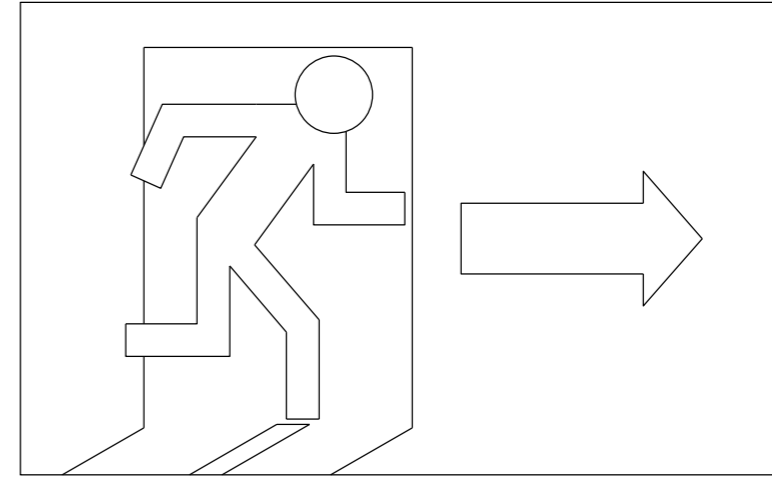

ITEM 7 STOCK CODE 501208
EXIT TO THE RIGHT

NOTES

- 1 MATERIAL TO BE NON-RADIOACTIVE FILM LUMINESCENT OR PHOSPHORESCENT CAPABLE OF STORING AMBIENT LIGHT AND EMITTING LIGHT AS STATED IN NOTE 2 AFTERGLOW.
- 2 AFTERGLOW (EMISSION) MUST BE PERCEPTABLE TO DARK ADAPTED EYE FOR 10 HOURS AS FOLLOWS:
PHASE ONE -FIRST 30 MINUTES - BRIGHTNESS DECREASES BY APPROXIMATELY 80%.
PHASE TWO - 8 HOURS - BRIGHTNESS DECREASES GRADUALLY AT A RATE EQUIVALENT TO THE PERCEPTION OF A DARK ADAPTING HUMAN EYE.
- 3 MATERIAL MUST RECHARGE IN APPROX 4 MINUTES WHEN EXPOSED TO NORMAL OFFICE LIGHTING.
- 4 MUST BE WASHABLE AND HAVE A MINIMUM 20 YEAR LIFE UNDER INDDOR CONDITIONS.
- 5 BACKING TO BE SUITABLY ROBUST MATERIAL COMPATIBLE WITH LUMINESCENT FILM.
- 6 COLOURS:
 LUMINOUS GREEN (BACKGROUND)
 LUMINOUS YELLOW (SYMBOLS)

| 4 | ITEMS 1, 2, 3 AND 4 REMOVED STOCK CODES AND NOTES UPDATED REDRAWN IN CAD | C.C. | MAY'13 | A.T. | B.C. |
|------------|--|------|--------|------|------|
| NO | DESCRIPTION | DRN | DATE | CKD | APPD |
| AMENDMENTS | | | | | |



| | | | | | |
|-------------------------------|-----------|--|---------------------------|-------------------|--|
| DES | A.TALYOR | POWER STANDARD DRAWING | | | |
| DRN | C.COPPINS | SIGNS EMERGENCY EXIT LUMINOUS | | | |
| CKD | A.TALYOR | | | | |
| APPD | A.TALYOR | | | | |
| SCALE | N.T.S. | | | | |
| ISSUED | NOV'10 | A3 | DRAWING NUMBER | S02-1-8-09 | |
| ALL DIM. IN | mm | | | | |
| DRAFTING STANDARD TO A.S.1100 | | | | | |