

CRITCHLEY K-TYPE TAG COMPONENT STOCK CODES:

CARRIER STRIP, 7 DIGIT: 412490


CHARACTER	STOCK CODE
A	412454
B	412455
C	412456
D	412457
E	412458
F	412459
G	412460
H	412461
I	412462
J	412463
K	412464
L	412465

CHARACTER	STOCK CODE
M	412466
N	412467
O	412468
P	412469
Q	412470
R	412471
S	412472
T	412473
U	412474
V	412475
W	412476
X	412477

CHARACTER	STOCK CODE
Y	412478
Z	412479
0	412489
1	412480
2	412481
3	412482
4	412483
5	412484
6	412485
7	412486
8	412487
9	412488

NOTES

1. INCLUDED ON TAG IS SWITCH/SUBSTATION/LOT/CIRCUIT BREAKER/POLE NUMBER AND DESTINATION.
2. TAG SHALL BE ALUMINUM OF AT LEAST 2.0mm THICKNESS, TEXT SHALL BE STAMPED ONTO THE TAG.
3. MINIMUM HEIGHT OF TEXT IS 6mm FOR HV DESTINATION TAG.
MINIMUM DEPTH OF TEXT IMPRINT IS 1mm.
HV TAG SHALL BE HELD BY STAINLESS STEEL CABLE TIE REFER S02-1-9-01.
4. TAGS SHALL BE USED FOR ALL CABLES GOING UNDERGROUND, INCLUDING BUT NOT LIMITED TO CABLES ON CABLE TERMINATION POLES, INSIDE PACKAGE SUBSTATIONS, LV PILLARS, RING MAIN UNITS, SWITCHING STATIONS AND ZONE SUBSTATIONS.
5. LV TAGGING SHALL BE VIA CRITCHLEY K-TYPE TAGS. CRITCHLEY TAGS SHALL BE HELD TO THE CABLE WITH NYLON CABLE TIES.
6. ALL CRITCHLEY K-TYPE CHARACTERS SHALL BE BLACK TEXT ON YELLOW BACKGROUND.
ALL CRITCHLEY STOCK CODES ARE FOR A PACK OF 500.

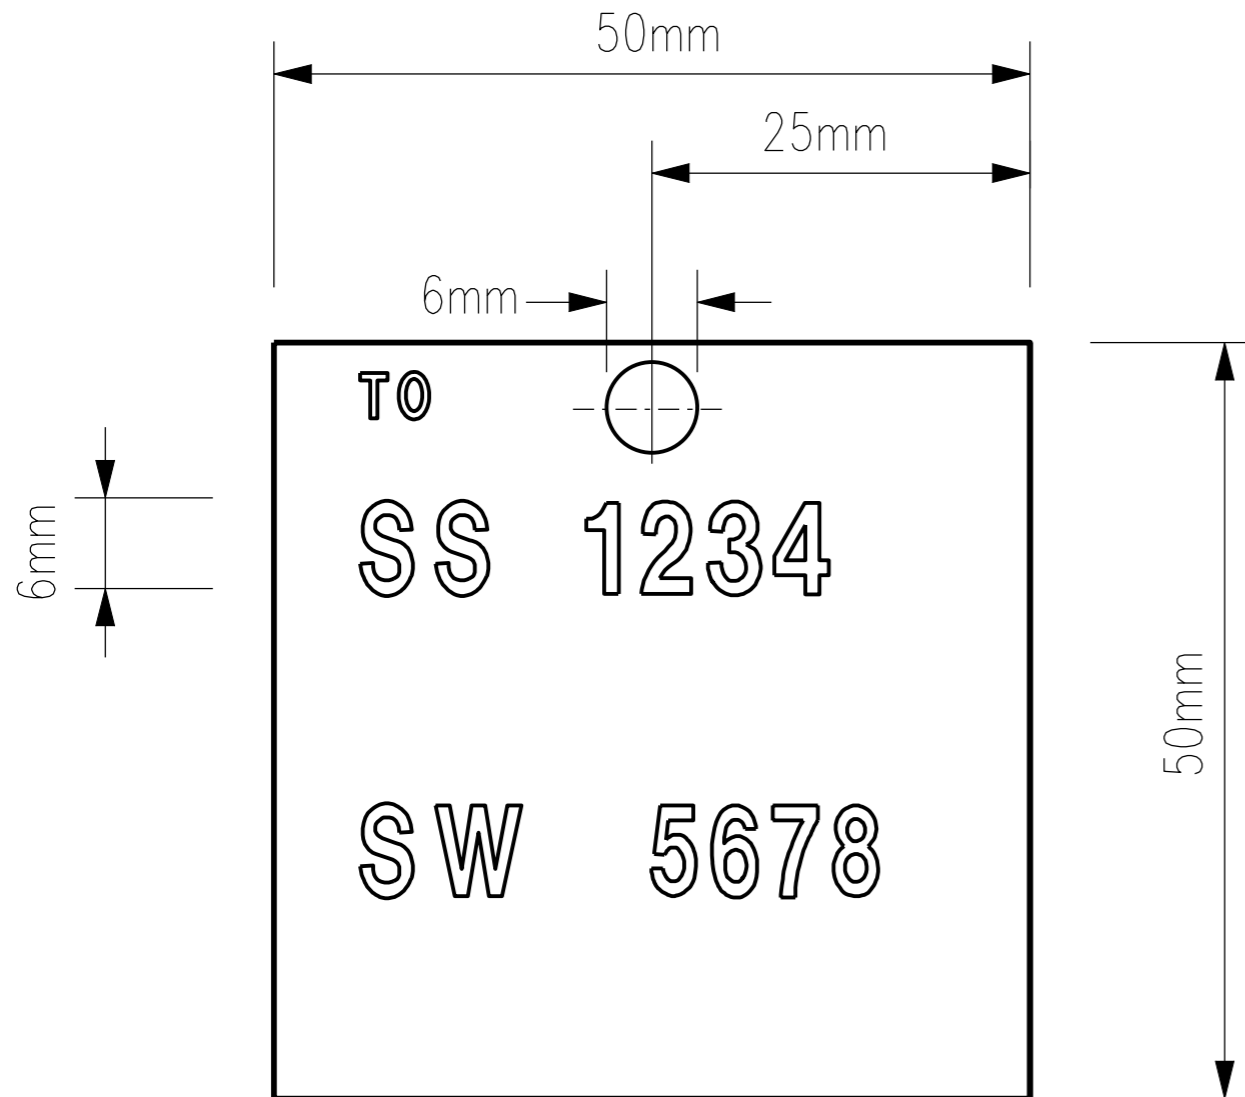

ITEM 1
HV DESTINATION TAG

NO	DESCRIPTION	DRN	DATE	CKD	APPD
3	CRITCHLEY TYPE TAG STOCK CODES ADDED. NOTE 5, 6 ADDED NOTE 1 AND 3 AMENDED	A. T.	MAY '13	B. C.	B. C.
2	ITEM 2 (LV DESTINATION TAG) REMOVED	A. S.	MAY '07	R. S.	S. C.
1	TAG THICKNESS CHANGED TO 1.0mm	A. S.	FEB '06	C. C.	C. C.
0	ISSUED FOR CONSTRUCTION	K. I.	FEB '05	C. C.	C. C.
AMENDMENTS					



DES	C.C.	POWER STANDARD DRAWING			
DRN	K. I.	SIGNS DESTINATION TAGS DISTRIBUTION CABLING			
CKD	C. C.				
APPD	C. C.				
SCALE	1:5				
ISSUED	FEB '05	A3	DRAWING NUMBER	S02-1-8-25	
ALL DIM. IN	mm				
DRAFTING STANDARD TO A.S.1100					