

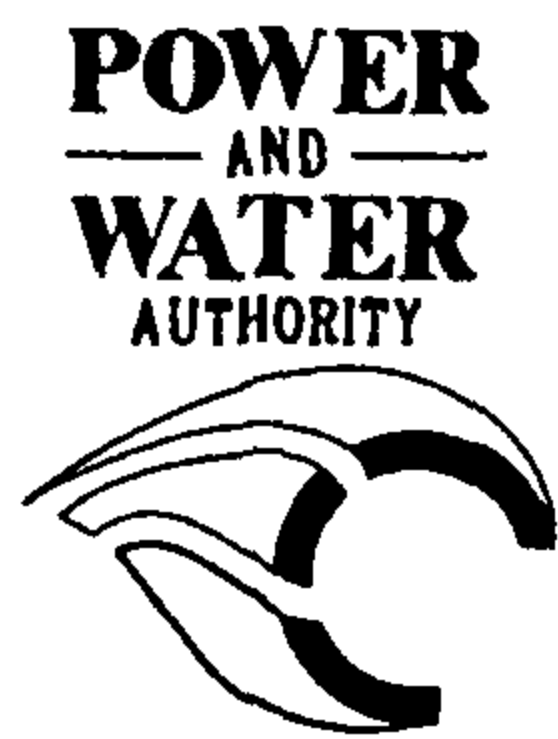

ITEM	STOCK CODE	DESCRIPTION
2	11072	CARTRIDGE STRIPLE FUSE 250 A FAST ACTING 500 V AC SIZE 1 DIN 43-620
3	258210	LINK BLADE 250 A 500 V AC SIZE 1 DIN 43-620

**NOTES :**

1. UNIT TO BE SUPPLIED WITH GALVANIZED MOUNTING BRACKET. REFER TO DRAWING S1-1-4-31 FOR ALTERNATIVE BRACKET FOR CROSSARM MOUNTING.
2. ISOLATOR RATING - 250 AMPS WITH LINK BLADES  
- 250 AMPS WITH FUSES
3. UNIT TO BE SUPPLIED WITH HARDWARE TO TERMINATE TWIN 95 sq.mm ALUMINIUM XLPE INSULATED CABLE, BUT SHOULD BE CAPABLE OF CONVERSION TO LUG TERMINATION.

**ITEM 1 SWITCH LV COMBINATION ISOLATOR/FUSE 250 A**

( STOCK CODE 255943 )

1	REDRAWN ON C.A.D. NOTE 3 ADDED. NOTE 1 AMENDED.	J.A.L.	S.C.M.	P.J.D.	JUN'95	 <p><b>POWER AND WATER AUTHORITY</b></p>	DES -	<b>N.T. STANDARD DRAWING</b>  SWITCHGEAR LV - ABC COMBINATION SWITCH 250 AMP ISOLATOR / FUSE			
							DRN G.R.				
No.	AMENDMENT	DRN	CKD	APPD	DATE	NORTHERN TERRITORY	CKD pmc	A3	DRAWING NUMBER	S4-1-3-5	
							APPD C.H.Y.				
							SCALE 1 : 5				
							ISSUED FEB'94				
							ALL DIM. IN mm				