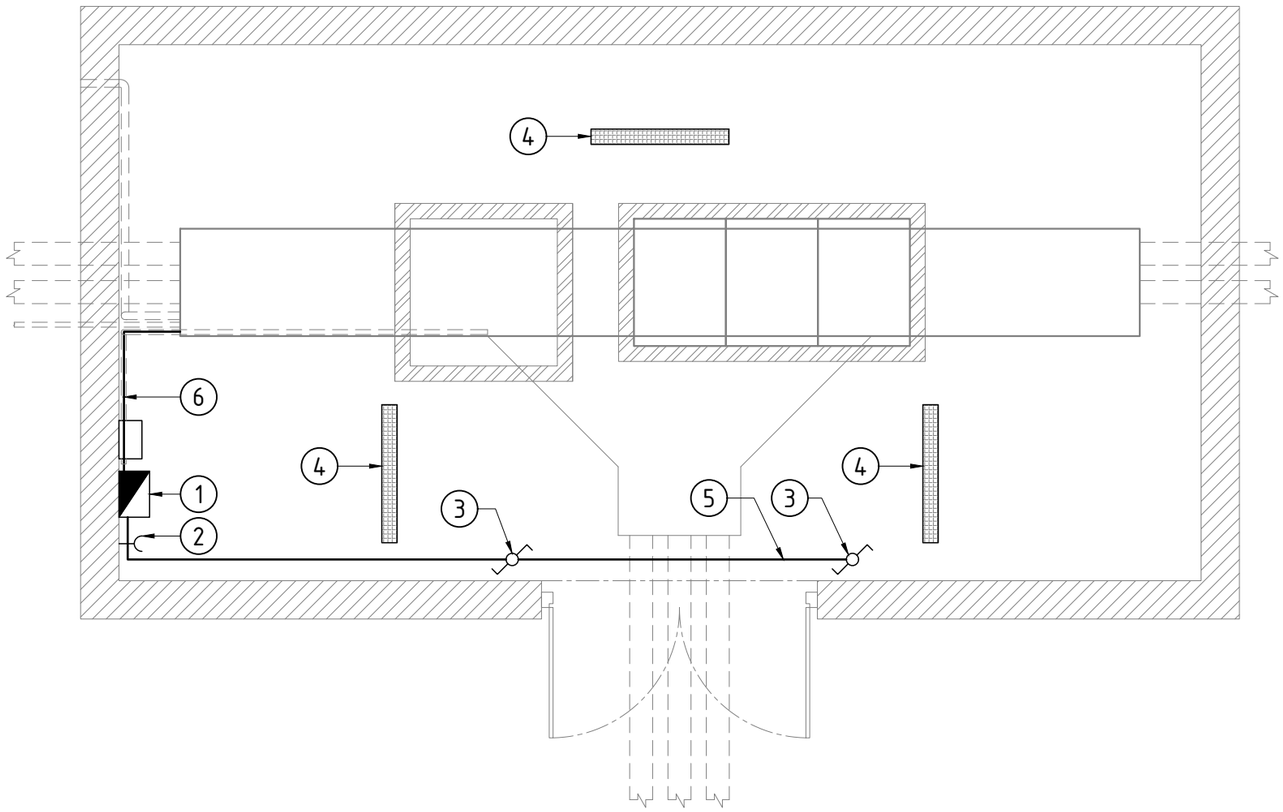


PLAN VIEW

LIGHT AND POWER SERVICES

SCALE - NTS

NOTES

1. NO FIRE DETECTORS ARE REQUIRED IN THE SWITCHING STATION.
2. CONDUITS AND CABLING FOR LIGHT, POWER AND COMMUNICATION CIRCUITS MAY BE EITHER SURFACE RUN OR CAST IN WALLS AND CEILING.
3. ANY SIGNS OR LABELS THAT ARE TO BE AFFIXED TO THE SWITCHING STATION WILL BE SUPPLIED AND INSTALLED BY THE DEVELOPER/CONTRACTOR.
4. CONSUMER TO PROVIDE ELECTRICAL SUPPLY TO ITEM 1.
5. SM6 SWITCHGEAR SHALL HAVE HEATER CIRCUITS POWERED VIA A 10A CIRCUIT BREAKER FOR EACH GROUP OF SWITCHBOARD.
6. FOR ALL GMK1000 RECLOSER COMMS AND LV SUPPLY CONDUIT/ANACONDA REQUIREMENT, REFER TO S02-02-06-47 & S02-01-04-31

ITEM No.	MOUNTING HEIGHT FROM FLOOR
1	2000
2	500
3	1500

EQUIPMENT SUPPLIED AND INSTALLED BY DEVELOPER/CONTRACTOR

ITEM No.	QTY	DESCRIPTION	SIMILAR
1	1	SWITCHBOARD 250V 11 POSITION 10KA MCD WITH RCD	
2	1	GENERAL PURPOSE OUTLET 15A GRAY	CLIPSAL - 25/15N
3	2	SWITCH - 2 WAY - 250V 10A GRAY	CLIPSAL - 31VA
4	3	FLUORESCENT LIGHT 2x36W T8 CEILING MTG	
5	A/R	ASSOCIATED CONDUIT FITTING AND CABLE FOR LIGHT AND POWER CIRCUITS	
6	1	NOJA GMK1000 LV SUPPLY	

NO	DESCRIPTION	DRN	DATE	CKD	APPD
0	ISSUED FOR CONSTRUCTION	P.G.	OCT'26	B.C.	B.V.

AMENDMENTS

PowerWater
NORTHERN TERRITORY

DES	B.VANDERSTELT
DRN	P.GUNA
CKD	B.CHEUNG
APPD	B.VANDERSTELT
SCALE	NTS
ISSUED	OCT'26
ALL DIM. IN mm	

POWER STANDARD DRAWING

IMPORT & EXPORT STATION
MISCELLANEOUS SERVICES

A3

DRAWING NUMBER S02-02-07-66

0 AMDT

DRAFTING STANDARD TO A.S.1100

CAD PRODUCT - DO NOT AMEND MANUALLY