NTESMO

B2B Procedure Service Order Process

Contents

1 Introduction 3
1.1 Purpose and scope 3
1.2 Definitions and interpretation 3
1.3 Related documents 3
1.4 Exclusions 4
1.5 Guidance Reference notes 4
2 Business communication 5
2.1 Process overview 5
2.2 General principles 10
2.3 Not used in the NT procedures 11
2.4 Acknowledging receipt of the ServiceOrderRequest 12
2.5 Service orders requiring customer consultation 12
2.6 Scheduled date and customer preferred date and time 13
2.7 Where work will not be completed within the required timeframe 14
2.8 Delivery priorities 15
2.9 Raising a ServiceOrderResponse 15
2.10 Use of status, exception and product codes in ServiceOrderResponses 15
2.11 Closing the service order process 16
2.12 Cancelling a ServiceOrderRequest 16
2.13 Updating a ServiceOrderRequest 17
2.14 Service paperwork 17
2.15 Explanation of use of *ExceptionCodes* 19
2.16 Specific service order requirements 22
2.17 Multiple service orders 27
2.18 Multiple service orders sent to the metering provider 34
3 Timing requirements 34
3.1 Overview of timing requirements 34
3.2 Definition of timing points and timing periods 36
3.3 Specific timing requirements 38
4 Transactions 42
4.1 ServiceOrderRequest transaction data 42
4.2 ServiceOrderRequest transaction data 57
4.3 ServiceOrderResponse transaction data 64
4.4 BusinessAcceptance/Rejection transaction data 66

Version Release History

Version	Date	Comments
1.0	2 October 2023	Initial NT procedure based on IEC version 3.8.
1.1	1 September 2024	Change of effective date only
1.2	1 September 2024	Timing update to Table 11
1.5	1 December 2025	Updated based on IEC v3.9
1.6	1 November 2026	Updated based on IEC v4.1

Document preparation and effective date	
Prepared by:	NT Electricity System & Market Operator
Version:	1.6
Effective date:	1 November 2026
Status:	Final

Approved for distribution and use by	
Approved by:	Simon Middleton
Title:	Senior Manager Electricity Market and Reform
Date:	20 July 2026

1 Introduction

1.1 Purpose and scope

a. This B2B Procedure: Service Order Process (Procedure) is *published* by NTESMO in accordance with clause S7A.1.3 of the NT NER, and specifies the Service Order communication and transaction data.

b. This Procedure has effect only for the purposes set out in the NT NER, and jurisdictional codes. The NT NER and jurisdictional codes prevail over this Procedure to the extent of any inconsistency.

c. This Procedure defines standard process and transaction data requirements, which enables Participants to request defined services ("Service Orders") and to receive confirmation that the work will or will not be undertaken (or attempted) and subsequently that the work has or has not been completed as requested using a consistently understood process and transactions.

1.2 Definitions and interpretation

a. The Communications Guideline:

   i. is incorporated into and forms part of this Procedure; and

   ii. should be read with this Procedure.

b. In the event of any inconsistency between this Procedure and the NTESMO B2B Procedure: Technical Delivery Specification for B2B Procedures, unless this Procedure provides otherwise, the relevant NTESMO B2B Technical Procedure shall prevail to the extent of the inconsistency.

c. In some instances certain B2B communications can only be initiated by a nominated role in the NT NER and therefore have been specified in this Procedure.

d. All times (related to the conduct of the work) refer to the local time for the Site (where the work requested is to be carried out). Local time is inclusive of daylight-saving time changes.

The NT Procedures are based on the equivalent MSATS and B2B procedure documents from the National Electricity Market (NEM). To maintain document alignment where a section or element of the NEM MSATS and B2B procedures is not used in the NT procedures this has been replaced with the phrase 'Not used in the NT Procedures' rather than that section or element be deleted from the NT Procedures.

1.3 Related documents

Table 1 Related Documents

Title	Location
Communications Guideline	NTESMO library
B2B Procedure: Technical Delivery Specifications	NTESMO library
B2B Procedure: One Way Notification	NTESMO library
B2B Procedure: Meter Data Process	NTESMO library

Title	Location
B2B Procedure: Customer and Site Details Notification Process	NTESMO library
MDFF Specification NEM12, NEM13	NTESMO library
B2B Guide	NTESMO library

1.4 Exclusions

a. This Procedure does not apply to:

   i. requests for network augmentation;

   ii. automated / electronic Service Order status requests;

   iii. any updates to MSATS that may be required during any of these Service Order processes;

   iv. the technical infrastructure and delivery mechanism allowing Participants to send and receive Service Order transactions;

   v. the reporting of faults and emergencies; or

   vi. Market Settlement and Transfer Solution (MSATS).

1.5 Guidance Reference notes

a. This document contains Guidance Notes that provides the reader with a reference point where an obligation for services is provided in the NTEM.

   i. A number of timing requirements that represent common industry practice have also been included. These timings are not associated with the communication of B2B transactions, but have been included as good industry practice and/or to support Participants in meeting obligations arising from other instruments, but do not have a head of power and are not enforceable.

   ii. Guidance Notes are indicated by the use of **[Guidance Note #]** at the commencement of the clause in this procedure.

   iii. The table below lists the document or documents for reference.

Table 2 Guidance Notes

Reference	Document Name
[Guidance Note 1]	This is an accepted or common industry practice that does not have a direct reference to a specific legal or jurisdictional requirement.
[Guidance Note 4]	NT National Electricity Rule (NT NER)

2 Business communication

2.1 Process overview

a. Table 3 describes each Service Order type and related subtypes to be used where the required type of work at a *connection point* or *metering point* is known and covered by the available codes.

b. The use of *ServiceOrderType* and *ServiceOrderSubType* combination must be applied as identified in the table below.

Table 3 Service Order Types and Subtypes

Service Order Type	Service Order Sub Type	Description	Description of use
Service Order Type	Service Order Sub Type	Description	Description of use
Supply Service Works	Allocate NMI	The Initiator requests a *NMI* for a Site or a Secondary Settlement point	Used where the *retailer* wants the Site or registered in MSATS, with the *retailer* as the current FRMP (at the time of *NMI* allocation).
Supply Service Works	Tariff Change	DNSP is requested to change the Network Tariff.	This is used where the Initiator wishes to change the tariff. Where a *meter* is required to be reconfigured, a Metering Service Works – Meter Reconfiguration SO should be raised.
Supply Service Works	Supply Alteration	DNSP is requested to alter the *supply*. It does not include new *supply* connections and *supply* abolishment.	Examples of use: Increasing *supply* from 1 phase to 3 phase. Relocation of the service line not involving a change of *NMI*.
Supply Service Works	Supply Abolishment	This involves decommissioning a *NMI*. In all jurisdictions other than NSW and the ACT, the DNSP is requested to remove the service line/cable as *supply* is no longer required at the Site. Further information on jurisdictional differences is available in section 2.16.6.	For example, where a building is to be demolished, and a *supply* is no longer required or *supply* to the *NMI* is no longer required at the customer's premise. Note: A De-energisation request is not required unless it is to occur prior to the *supply* abolishment.
Supply Service Works	Establish Temporary Supply	DNSP is requested to arrange a new physical connection to a temporary *connection point*.	Where a customer wants to establish temporary *supply* to a builder's temporary *supply* pole at a construction Site.
Supply Service Works	Establish Temporary in Permanent	DNSP is requested to arrange a new physical connection to a temporary *connection point* that will convert to the permanent location after building construction.	Where a customer wants to establish temporary *supply* to a construction Site and when completed will remain as the permanent *supply*.

Service Order Type	Service Order Sub Type	Description	Description of use
Supply Service Works	Establish Permanent Supply	DNSP is requested to arrange a new physical connection.	Where a customer wants to establish a new permanent *supply* at a connection point.
Supply Service Works	Temporary Isolation-Scoping Request	The DNSP is requested to determine all NMIs requiring interruption of supply at a shared supply point and coordinate a distributor planned interruption.	A metering party has advised that metering works cannot proceed due to a shared supply point.
Supply Service Works	Temporary Isolation	DNSP is requested to temporarily isolate (disconnect) *supply* at a *supply* point for a limited time, usually just for the day.	Where *supply* at a connection point requires isolation for a limited time without the need for a Re-energisation. For example where a service line needs to be dropped and reconnected within a short period of time. A separate De-energisation request (for *supply* isolation or disconnection at pole top, pillar box or pit) is not required. Where *supply* isolation extends beyond 24 hours, a follow up Re-energisation Service Order to the DNSP is required to reconnect the *supply*.
Supply Service Works	Temporary Isolation-Group Supply	DNSP is requested to temporarily isolate (disconnect) *supply* where multiple *NMI*s are connected to a *supply* point, and the Shared Fusing Meter Replacement Procedure is not applicable.	E.g. needing to isolate *supply* to an apartment block for a limited time, usually just for the day.
Supply Service Works	Temporary Isolation-One In All In	DNSP is requested to temporarily isolate (disconnect) supply to enable the Shared Fusing Meter Replacement Procedure	Not used in the NT Procedures
Re-energisation	After Disconnection For Non-Payment	A re-energisation after disconnection as part of a non-payment process.	
Re-energisation	Remote	Where the Initiator requires re-energisation not requiring a physical visit to the customer's premises.	Examples: Customer is moving into a premises. Customer has previously requested that *supply* be temporarily de-energised and now wishes the *supply* restored.
Re-energisation	Retrospective Move-in	When a move-in reading is required for an already Energised Site.	

Service Order Type	Service Order Sub Type	Description	Description of use
Re-energisation	New Reading Required	Where a Retailer wants a reading taken, rather than a deemed *Meter Reading* for a manually read *meter*.	
Re-energisation	Physical Visit	Where the Initiator requires Re-energisation requiring a physical visit to the customer's premises.	
Re-energisation	Move-in	When an energisation and reading is required.	
Re-energisation	Recipient Discretion	The Recipient will re-energise the Site in the most efficient manner at the Recipient's discretion.	Where standard practice applies.
De-energisation	Disconnect at Pillar-Box Pit Or Pole-Top	A physical disconnection of the service mains at the connection to the network.	
De-energisation	Remove Fuse	The Initiator requires the physical removal of the *supply* fuse.	
De-energisation	Remote	Where the Initiator requires de-energisation not requiring a physical visit to the customer's premises.	
De-energisation	Local Meter Disconnection	Attend Site and disconnect at the *meter*, by either isolating the *meter* point itself, opening the contactors or removing tails from the *meter* terminal.	
De-energisation	Recipient Discretion	The Recipient will de-energise the Site in the most efficient manner at the Recipient's discretion.	Where standard practice applies.
Special Read	Check Read	Where there is a reported error in the *Meter Reading*.	Used to check the accuracy of the *Meter Reading* only. For example, used to obtain a Special Read (rather than a scheduled read) arises where an out of cycle reading is required.
Special Read	Final Read	The initiator requires a read from the meter(s) in order to finalise billing for the customer at site.	Used when a reading is required for preparing a final bill for the Customer.
Special Read	*<Blank>*	Where a Special Read Service Order is raised and is not a Check Read or Final	E.g. used for transfers and move ins.


Service Order Type	Service Order Sub Type	Description	Description of use
		Read, a Special Read Service Order with no Service Order Sub type is permitted.	
Metering Service Works	Commission Meter	The initiator requires a customer supplied meter to be commissioned	Not used in the NT Procedures
Metering Service Works	Exchange Meter	The Initiator requires an exchange of one or more *meters*.	Examples: Change a single phase *meter* into a multi-phase *meter*. Meter Churn.
Metering Service Works	Install Meter	The Initiator requires the installation of one or more *meters*.	
Metering Service Works	Move Meter	The Initiator requires the relocation of one or more *meters*.	For example, to facilitate building works at a Site, but not decommission the *NMI*.
Metering Service Works	Meter Reconfiguration	The Initiator requires the reconfiguration or reprogramming of the *metering installation*.	Usually required when a Retailer needs to change tariff. Examples include: Changing the hours of application of different registers (peak and off-peak). Turn on/off off-peak registers. Off-peak conversion (change from one off-peak Controlled Load tariff to another). Installation of solar.
Metering Service Works	Meter Investigation-Inspect	The Initiator requires an investigation of a *metering installation*. The Initiator must provide additional information in the special instruction field where a Service Order Sub Type of Meter Investigation-Inspect or 'Meter Investigation-Test is used.	Examples: A need to investigate a can arise where: A Customer raises a request with their Retailer to investigate a *meter* fault; or The Retailer has grounds to proceed with an investigation. A Customer believes there is a problem with the *metering installation*. A Retailer may request an investigation for example, on the grounds of suspected fraud/tampering or consistently abnormal *meter* readings.
Metering Service Works	Meter Investigation–Meter Test	The Initiator requires an investigation of a *metering installation*. The Initiator must provide additional information in the special instruction field where a Service Order Sub Type of Meter Investigation-Inspect or 'Meter Investigation-Test is	Examples: A need to investigate a can arise where: A Customer raises a request with their Retailer to investigate a *meter* fault; or The Retailer has grounds to proceed with an investigation. A Customer believes there is a problem with the *metering installation*. A Retailer may request an investigation for

Service Order Type	Service Order Sub Type	Description	Description of use
		used.	example, on the grounds of suspected fraud/tampering or consistently abnormal *meter* readings.
Metering Service Works	Remove Meter	The removal of one or more *meters* is required.	Remove redundant *meters*. A Remove Meter used to remove the last *meter* on Site should be accompanied with a *Supply* Abolishment sent to the DNSP.
Metering Service Works	Install Controlled Load	The Initiator requires the installation of Controlled Load equipment.	Installation of a controlled load. For example, hot water, pool pump.
Metering Service Works	Install Meter Isolation Device	The Initiator requires the installation of a meter isolation device only.	
Metering Service Works	Change Timeswitch settings	The Initiator requires a change to timeswitch settings.	Example: Change of timeswitch settings for daylight savings.
Metering Service Works	Reseal Device	Device seal missing and requires replacement.	
Miscellaneous	*<Blank>*	The Initiator requires a service not covered by one of the above Service Orders and the use of this transaction is covered by a bilateral agreement. A Service Order Sub Type is not to be provided for Miscellaneous Service Orders.	This Service Order type can only be used when a bilateral agreement exists.
Update Standing Data	*<Blank>*	The Initiator requires the Recipient to raise a Change Request to update MSATS Standing Data	Not used in the NT Procedures

2.1.1 Communication process diagram

a. Figure 1 illustrates the high-level communication process flow for Service Orders.

Figure 1 Service Orders request process flow

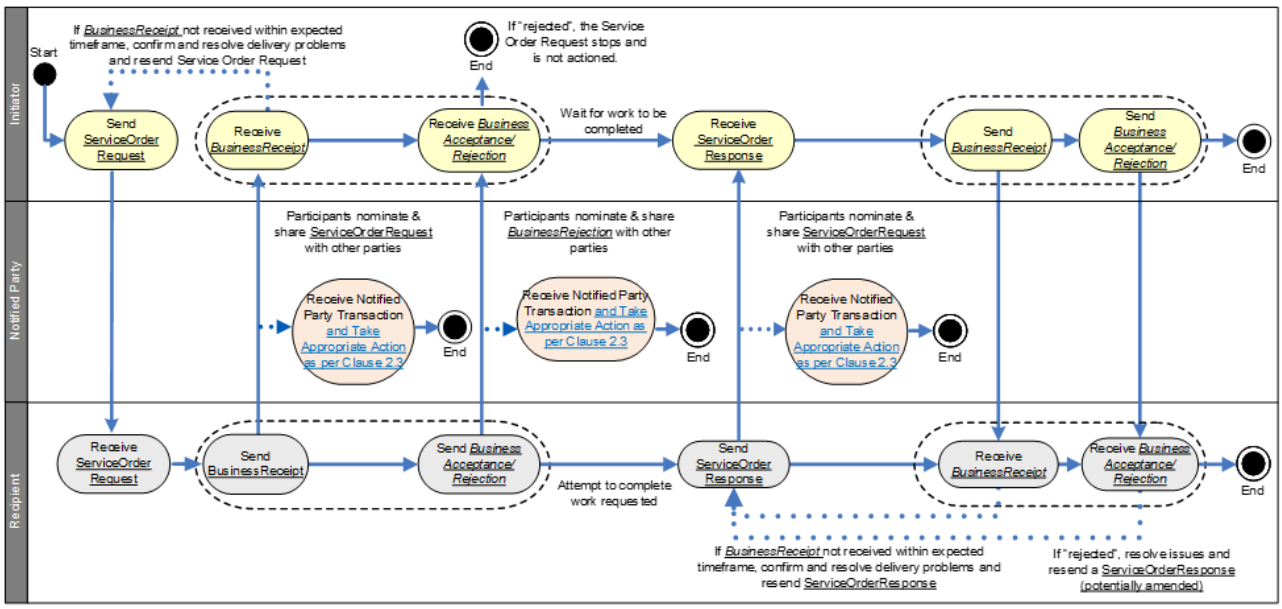

2.2 General principles

a. A ServiceOrderRequest is raised by the Initiator.

b. **[Guidance Note 1]** A prospective Retailer is only permitted to send the following ServiceOrderRequest:

   i. Supply Service Works with a ServiceOrderSubType of Allocate NMI, Establish Temporary Supply, Establish Temporary in Permanent, Establish Permanent Supply;

   ii. Special Read (excluding ones with a ServiceOrderSubType of "Check Read");

   iii. Re-energisation;

   iv. Metering Service Works ServiceOrderRequest, with a ServiceOrderSubType of Install Meter, Exchange Meter;

   v. Miscellaneous.

c. **[Guidance Note 1]** A previous Retailer for a *NMI* that is the subject of the ServiceOrderRequest is only permitted to raise a Metering Service Works (with *ServiceOrderSubType* of Meter Investigation – Inspect and Test), or Special Read (with *ServiceOrderSubType* of "Check Read") ServiceOrderRequest.

d. If a DNSP is the MC for the *NMI*, then the Initiator must send any ServiceOrderRequest to the DNSP. If the DNSP is not the MC for the *NMI*, then the Initiator must send any ServiceOrderRequest to the appropriate Participant responsible for the required service.

e. If the Recipient rejects the ServiceOrderRequest, the Initiator may seek further clarification from the Recipient or dispute the rejection. Where the Recipient has inappropriately rejected the

ServiceOrderRequest, the Initiator must raise a replacement ServiceOrderRequest if they still require the work to be done. Where the Initiator raises a replacement ServiceOrderRequest, the Initiator must:

i. Agree with the Recipient that the Initiator may issue a replacement ServiceOrderRequest with an ActionType of "Replace";

ii. Use a new ServiceOrderID value;

iii. Include the ServiceOrderID value of the rejected ServiceOrderRequest in the SpecialInstructions field; and

iv. Include details of Notified Parties (as appropriate where Notified Party is used).

f. **[Guidance Note 1]** Where a ServiceOrderRequest requires a Site visit and the *meter* is a Type 6 *meter*, then the requested work will always require the taking of a *Meter Reading*.

g. The Recipient must send a ServiceOrderResponse with details of the status of the requested work.

h. If the Recipient issues a ServiceOrderResponse with a *ServiceOrderStatus* of "Partially Completed" or "Not Completed" and the Initiator:

i. Is satisfied with the outcome, send a BusinessAcceptance/Rejection of Accept;

ii. Requires the work to be completed, raise a new ServiceOrderRequest (with a new ServiceOrderID);

iii. Considers that incomplete or incorrect information has been provided in the ServiceOrderResponse, the Initiator must send the Recipient a BusinessAcceptance/Rejection transaction of Reject.

i. The final step of the process is when the Initiator sends the Recipient a *BusinessAcceptance/Rejection* transaction to the ServiceOrderResponse.

j. **[Guidance Note 1]** Appointments for Service Orders are only supported where the relevant parties have a bilateral agreement.

k. Where required, the *CustomersPreferredDateAndTime* in the ServiceOrderRequest should be used to confirm an Appointment as agreed between the Initiator and Recipient and must include an *AppointmentReference*.

l. **[Guidance Note 1]** The Initiator must have agreement from the party nominated as the coordinating party prior to raising the ServiceOrderRequest.

2.3 Not used in the NT procedures

2.4 Acknowledging receipt of the ServiceOrderRequest

a. Upon receipt of a ServiceOrderRequest, a Recipient must acknowledge receipt of the ServiceOrderRequest using a *BusinessReceipt*. This indicates that the Service Order has been received and is readable by the Recipient.

b. The Recipient must send a *BusinessAcceptance/Rejection* to the Initiator acknowledging whether the ServiceOrderRequest has been validated by the Recipient and is understood and accepted by the Recipient, or rejected.

c. A *BusinessAcceptance/Rejection* with a Business Event of 'Accept' indicates that the Recipient reasonably believes it will be able to complete the work specified in the ServiceOrderRequest within the required timeframe.

d. Reasons for a rejection or validation errors must be advised to the Initiator using the *EventCodes* detailed in Table 17 *BusinessAcceptance/Rejection*.

e. Where the Initiator receives a *BusinessAcceptance/Rejection* transaction indicating that there were validation errors, the Initiator should address any issues and, if necessary, submit a new ServiceOrderRequest with a new *ServiceOrderID*. In this situation the Initiator must not issue a "Cancel" ServiceOrderRequest to the Recipient for the original (invalid) ServiceOrderRequest.

f. Where the Initiator does not receive a *BusinessAcceptance/Rejection* from the Recipient, the Initiator should investigate the failure of the delivery and notify the Recipient if the problem is deemed to lie with the Recipient.

2.5 Service orders requiring customer consultation

a. In order to complete the work requested by the Initiator, there are some instances where the Recipient may need to consult directly with the Customer. These situations tend to arise, for example, in De- energisations/Re-energisations or temporary disconnections for large business/commercial/industrial Customers.

b. Where the Initiator requests the Recipient to consult with the Customer to make arrangements for the completion of the work requested, the Initiator must:

   i. Use the value of "Yes" in CustomerConsultationRequired and must provide the reason for the need to consult the Customer in SpecialInstructions of the ServiceOrderRequest.

   ii. Only use the value of "Yes" in CustomerConsultationRequired where the Initiator reasonably believes that customer consultation is required for the successful completion of the requested work.

   iii. Have previously advised the Customer that the Service Order Recipient will contact the Customer.

   iv. Complete the ContactName and ContactTelephoneNumber fields in the ServiceOrderRequest.

c. **[Guidance Note 1]** The Recipient must use reasonable endeavours to consult with the Customer to make arrangements for the completion of the work requested where the Initiator has provided a value of "Yes" in *CustomerConsultationRequired*.

d. **[Guidance Note1]** In discussions between the Recipient and the Customer, the nature of the work requested must not be changed without obtaining the consent of the Initiator. Where the nature of the work changes, the Recipient must advise the Initiator and reach agreement regarding the resolution of the change in the scope of work (for example, the Initiator may need to cancel the original ServiceOrderRequest and issue a new one).

2.6 Scheduled date and customer preferred date and time

a. The following apply to the *ScheduledDate* and *CustomerPreferredDateAndTime* fields on a ServiceOrderRequest:

   i. Where only the *ScheduledDate* field is completed:

      - The Initiator must not put a retrospective date in the *ScheduledDate* field.
      - If a retrospective date is received in the *ScheduledDate* field, the Recipient must provide the Initiator with a *BusinessAcceptance/Rejection* with a rejection message of 'Invalid data. Details provided in the *Explanation.'*

   ii. Where both the ScheduledDate and CustomerPreferredDateAndTime fields are completed:

      - The Initiator must not put a retrospective date in the *ScheduledDate* field.
      - If a retrospective date is received in the *ScheduledDate* field the Recipient must provide the Initiator with a *BusinessAcceptance/Rejection* with a rejection message of 'Invalid data. Details provided in the *Explanation*.'
      - The date specified by the Initiator in the *ScheduledDate* and *CustomerPreferredDateAndTime* fields must be the same except as allowed in 2.6(c)(i)(B) and 2.6(c)(i)(C) in which case only the *CustomerPreferredDateAndTime* can be retrospective.
      - If a retrospective *CustomerPreferredDateAndTime* is provided otherwise than in accordance with 2.6(c)(i)(B) or 2.6(c)(i)(C), the Recipient must reject the ServiceOrderRequest with a rejection message of 'Invalid data. Details provided in the *Explanation*.'

b. **[Guidance Note 1]** The Recipient must use reasonable endeavours to complete the work requested and accepted on or after the *ScheduledDate* included in the ServiceOrderRequest, and within the Required Timeframe from this *ScheduledDate* or in the case of an appointment, agreed by the Initiator and Recipient, on the *ScheduledDate*.

c. Where the *CustomerPreferredDateAndTime* is provided in accordance with 2.6.(a)(ii)

   i. The CustomerPreferredDateAndTime should represent

      - The Customer's preference, as agreed with the Initiator, which becomes the *ScheduledDate* for the Service Order, or
      - A date and time agreed between the Initiator and Recipient to support exceptional Service Order requests (e.g. Re-energisation on a weekend with the ServiceOrderRequest sent the following Monday). Such requests must include details of the agreement in the *SpecialInstructions* field and have the same *ServiceOrderID* quoted by the Initiator to the Recipient by phone. In this instance,

the *CustomerPreferredDateAndTime* is the date agreed by both parties for the work to be completed; or

- Where a Customer advises the Initiator they have already moved into the Site and the Site is energised (left energised or energised by the Customer), if the Initiator requires a move-in reading the Initiator may raise a Re-energisation ServiceOrderRequest with a *ServiceOrdersubType* of "Retrospective Move-in", a *CustomerPreferredDateAndTime* that matches the move-in date, and a prospective *ScheduledDate*.

  [Guidance Note 1] The Recipient will provide a *meter* reading, undertaking field work if necessary.

ii. If the *CustomerPreferredDateAndTime* and *ScheduledDate* are not the same date, except as permitted in 2.6(c)(i)(B) and 2.6(c)(i)(C), the Recipient must provide the Initiator with a *BusinessAcceptance/Rejection* with a rejection message of 'Invalid data. Details provided in the Explanation'.

iii. If the *CustomerPreferredDateAndTime* is not reflected by the *ServiceTime*, the Recipient must provide the Initiator with a *BusinessAcceptance/Rejection* with a rejection message of 'Invalid data. Details provided in the Explanation'

d. **[Guidance Note 1]** The *ScheduledDate* must not be more than 100 calendar days in the future.

2.7 Where work will not be completed within the required timeframe

a. The term 'Required Timeframe' refers to the timeframes required for the completion of Service Order activities. See Section 3.3.3 of this Procedure.

b. Subject to specific provisions detailed in 3.3.3, the Required Timeframe is deemed to start from the *ScheduledDate*.

c. Where a Recipient and Customer agree an alternative timeframe (other than the Required Timeframe) for the completion of requested work, this arrangement takes precedence over any *ScheduledDate* or *CustomerPreferredDateAndTime*. The Recipient must inform the Initiator of the agreed alternative timeframe by an appropriate message in the *SpecialNotes* field of the ServiceOrderResponse.

d. **[Guidance Note 1]** Where the Recipient is unable to complete the requested work within the Required Timeframe (from the *ScheduledDate*), the Recipient should contact[1] the Initiator as soon as reasonably practicable to negotiate a new date. This situation may arise:

   i. When the Recipient first receives the ServiceOrderRequest and has an issue with the ScheduledDate requested by the Initiator; or

   ii. If unforeseen circumstances arise during the scheduling or completion of the work which may impact on completion of the work within the Required Timeframe of the ScheduledDate.

e. [Guidance Note1] If the Recipient becomes aware of an inability to meet the Required Timeframe then, prior to sending a *BusinessAcceptance/Rejection,* the Recipient should contact the Initiator to negotiate an acceptable date and confirm any arrangements via the *BusinessAcceptance/Rejection*.

[1] The Initiator may choose to use email to confirm telephone arrangements

An example would be where the Recipient needs to make special arrangements for a large or complex Site.

f. If the Recipient becomes aware of an inability to meet the Required Timeframe after sending a BusinessAcceptance/Rejection:

   i. **[Guidance Note 1]** The Recipient should contact the Initiator to negotiate an acceptable date and confirm any arrangements via email; and

   ii. The Initiator will either:

   - Note the change and update their systems accordingly, leaving the ServiceOrderRequest unchanged; or
   - Wait until the Recipient sends a ServiceOrderResponse, then raise a new ServiceOrderRequest if necessary.

   iii. If the *ServiceOrderStatus* is 'Partially Completed' or 'Not Completed', the Initiator may issue a new ServiceOrderRequest with amended details.

g. **[Guidance Note 1]** Where a *CustomerPreferredDateAndTime* has been agreed (with an *AppointmentReference*) and the Appointment cannot be met, the Recipient should contact the Initiator to negotiate an acceptable alternative date (i.e. a new *CustomerPreferredDateAndTime*).

   i. **[Guidance Note 1]** In this instance, if the Initiator does not cancel and re-issue the ServiceOrderRequest, the Initiator must confirm any revised Appointment details with the Recipient by email.

2.8 Delivery priorities

a. High Priority' ServiceOrderRequests are defined as same day or next day Re-energisations or cancellations of same day Re-energisations or De-energisations.

2.9 Raising a ServiceOrderResponse

a. The Recipient must send a ServiceOrderResponse to the Initiator with details of the status of the work specified in the ServiceOrderRequest using *ServiceOrderStatus* and *ExceptionCode*.

b. The Initiator must acknowledge receipt of the ServiceOrderResponse using a *BusinessReceipt* transaction. This acknowledges that the ServiceOrderResponse has been received.

c. The Initiator must send a *BusinessAcceptance/Rejection* acknowledging whether the ServiceOrderResponse has been validated and is understood and accepted by the Initiator.

2.10 Use of status, exception and product codes in ServiceOrderResponses

a. The *ServiceOrderStatus* reflects whether the work requested in a ServiceOrderRequest was:

   i. **Completed** - If all aspects of the work requested are completed by the Recipient, the Recipient must use the Code of "Completed" in the *ServiceOrderStatus.* In this case, an *ExceptionCode* is not required.

ii. **Partially Completed** - If the Recipient has completed the primary work (described by the *ServiceOrderType*) but was unable to complete other associated activity, for example; obtain an *Actual meter Reading*, the Recipient must complete the *ServiceOrderStatus* as “Partially Completed”. The Recipient must use an *ExceptionCode* to indicate the reason the work could not be completed.

iii. **Not Completed** - If the primary work requested could not be completed, the Recipient must complete the *ServiceOrderStatus* as “Not Completed” and the reason for the work being incomplete must be indicated using an *ExceptionCode*.

b. The Recipient identifies any chargeable work by using one or more applicable *ProductCodes*.

c. Specific requirements apply to the use of the “Cost TBA” code as follows:

i. The *ProductCode* “Cost TBA” must not be used for Re-energisation, De-energisation and Special Read ServiceOrderRequests; and

ii. The *ProductCode* “Cost TBA” must only be used when the Service Order Recipient needs to do further investigation to determine what work was attempted or completed at the Site. This *ProductCode* must not be used as a default.

d. Where the work done by the Recipient does not match what was requested in the ServiceOrderRequest, the *ProductCode* must correspond to the actual work done, not what was requested. An example of this situation is where the Recipient reconciles concurrent Requests for the same *NMI* (refer (a)).

2.11 Closing the service order process

a. The Service Order process ends when:

i. The Initiator has confirmed acceptance of the ServiceOrderResponse with a *BusinessAcceptance/Rejection* indicating acceptance; or

ii. The Initiator has rejected the ServiceOrderResponse (with a negative *BusinessAcceptance/Rejection*).

2.12 Cancelling a ServiceOrderRequest

a. The Initiator cannot cancel a ServiceOrderRequest after a ServiceOrderResponse has been received.

b. To cancel a ServiceOrderRequest, the Initiator must send a ServiceOrderRequest with the *ActionType* set to “Cancel” and must quote the *ServiceOrderID* of the ServiceOrderRequest to be cancelled.

c. If the Initiator needs to cancel a Service Order urgently, this must be communicated to the Recipient as soon as practicable. The Initiator must also send a "Cancel" ServiceOrderRequest on the same business day, unless otherwise agreed with the Recipient. On receipt of a “Cancel” ServiceOrderRequest:

i. if the original ServiceOrderRequest has been delivered and a *BusinessAcceptance/Rejection* has not been sent by the Recipient, the Recipient will:

- accept both ServiceOrderRequests; and
- send a ServiceOrderResponse to the original ServiceOrderRequest with a status of "Not Completed" and an *ExceptionCode* of "Initiator Cancellation";

ii. if the original ServiceOrderRequest has been received **and accepted** by the Recipient:

- If the ServiceOrderRequest has been completed or the Recipient is unable to cancel the field work, the Recipient will reject the "Cancel" ServiceOrderRequest with an *EventCode* indicating "Unable to Cancel ServiceOrderRequest. Requested work has commenced or is completed"; or
- If the ServiceOrderRequest has already been cancelled or the Recipient can cancel the field work, the Recipient will accept the "Cancel" ServiceOrderRequest.
- Guidance Note 1] If the original ServiceOrderRequest has not been received as agreed between parties by the Recipient, the Recipient must wait for 30 minutes (to allow time for the associated "New" (or "Replace") ServiceOrderRequest to arrive).
  - If the "New" (or "Replace") ServiceOrderRequest arrives:
    - Accept the "New" (or "Replace") ServiceOrderRequest.
    - Accept the "Cancel" ServiceOrderRequest.
    - Provide a ServiceOrderResponse to the Service Order.
  - If the "New" (or "Replace") ServiceOrderRequest has not arrived:
    - Reject the "Cancel" ServiceOrderRequest with an *EventCode* indicating "Unable to Cancel, Original Request Not Received".

iii. If the original ("New" or "Replace") ServiceOrderRequest subsequently arrives, the Recipient will reject the Request using an *EventCode* indicating "Previous Cancellation Already Processed".

2.13 Updating a ServiceOrderRequest

a. To change a ServiceOrderRequest, the Initiator cancels the original ServiceOrderRequest and issues a new one.

2.14 Service paperwork

a. This Procedure does not remove the need for related paperwork for individual Service Order processes (such as electrical work request or a notice of work request)2.

b. Where an individual Service Order process requires Service Paperwork, the following Service Order Transaction fields must be completed depending upon jurisdictional requirements:

   i. FormReference

   ii. FormNumber

   iii. SafetyCertificate

   iv. SafetyCertificateMethodSent

   v. MeteringSafetyCertificateID

   vi. MeteringSafetyCertificateMethodSent

c. Where Service Paperwork is required, the Initiator must ensure that:

[2] Refer to Section 6.1.8.2 of the B2B Guide for additional information on common industry practices.

i. If providing the Service Paperwork, the Service Paperwork number must be included in the FormNumber or the SafetyCertificateId field of the Service Order, as appropriate;

ii. If the Service Paperwork is being sent separately, the ServiceOrderID must be clearly displayed on the Service Paperwork;

iii. If Service Paperwork is to be provided directly to the Recipient by someone other than the Initiator, the Service Paperwork number is not required in the ServiceOrderRequest; or

iv. When Service Paperwork is left on Site:

- The Initiator must include information on an alternative, agreed, method to provide the Service Paperwork; and
- ServiceOrderID is not required on the Service Paperwork,

d. Where the Service Order is 'Rejected' or 'Not Completed' for reasons other than 'Missing Paperwork', the Initiator raises a subsequent ServiceOrderRequest:

i. is not required to resend the Service Paperwork (e.g. the Recipient already has this paperwork); and

ii. must populate the ServiceOrderID value of the rejected or not completed Service Order in the SpecialInstructions field of the replacement Service Order. (This will be used to cross reference with the Service Paperwork already provided).

e. Upon receipt of the BusinessAcceptance/Rejection of 'Accept' with a Business Event of "Documentation Required", the Initiator must provide the missing documentation to the Recipient as agreed.

f. After providing the BusinessAcceptance/Rejection of 'Accept' with a Business Event of "Documentation Required", if the Recipient has not received the required documentation within an agreed timeframe, the Recipient must send a ServiceOrderResponse with ServiceOrderStatus of 'Not Completed' and an ExceptionCode of 'Documentation Not Provided'.

g. Figure 2 illustrates the Timing Points for managing Service Orders requiring Service Paperwork and Table 4 defines the Timing Points:

Figure 2 Service Paperwork Timing Points

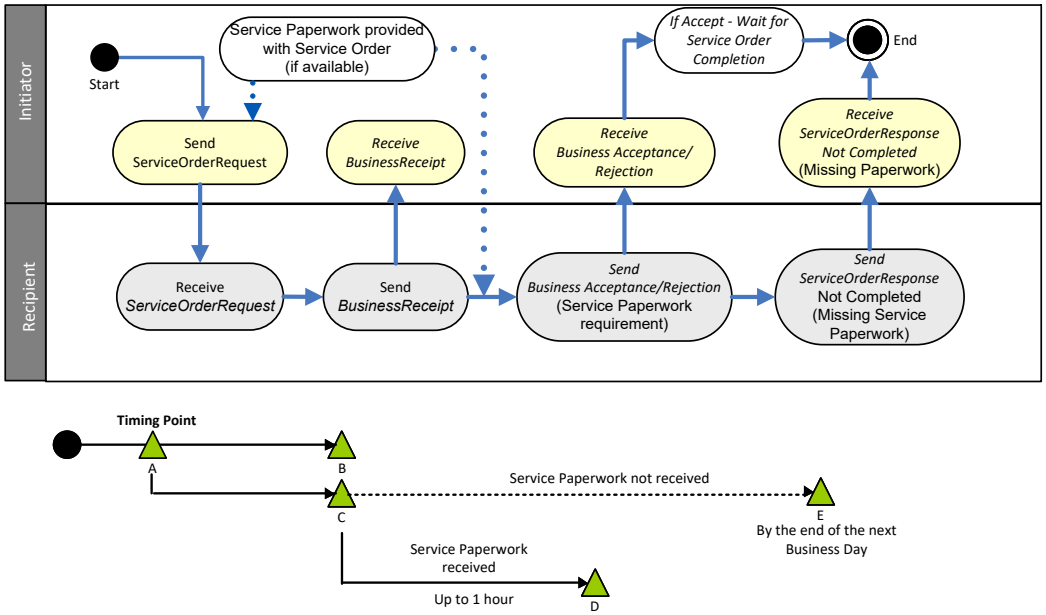


Table 4 Timing Point Definitions

Timing Point	Definition
A	This is the timing point where the Initiator issues a ServiceOrderRequest to the Recipient.
B	This is the timing point where the Recipient sends a *BusinessReceipt* for the Service Order.
C	This is the timing point where the Recipient commences the required waiting period for Service Paperwork. Note: The Recipient can send a *BusinessAcceptance/Rejection* at any time within the hour when the paperwork is received (and reconciled to the Service Order) or is not required.
D	The timing point where the Initiator receives the *BusinessAcceptance/Rejection* of 'Accept'. Where the Service Paperwork is missing, this 'Accept' shall include a warning – Missing Paperwork. Following a *BusinessAcceptance/Rejection* of Warning, this timing point commences the agreed period in which the Initiator must provide the Recipient the necessary Service Paperwork.
E	The timing point where, the Recipient has still not received the necessary Service Paperwork. The Recipient must provide a ServiceOrderResponse with *ServiceOrderStatus* of 'Not Completed' and an *ExceptionCode* of "Documentation Not Provided".

2.15 Explanation of use of *ExceptionCodes*

ExceptionCodes must conform with the rules in Table 5 below.

Value	Definition	Used with ServiceOrderStatus
Appointment Required	Customer has requested for an appointment to be made.	Not Completed.
Comms Refused	Customer refuses installation of a smart meter with active comms.	Not Completed.

Value	Definition	Used with ServiceOrderStatus
Coordination Failure	Another required party did not attend or cancelled	Not Completed
Customer On-Site	There is a Customer at Site resulting in the work requested not being completed.	Not Completed. Not allowed for De-energisation ServiceOrderRequests with *ServiceOrderSubType* of "Remove Fuse" or "Pillar-Box, Pit, or Pole-Top" and De-energisation Reason "Non-Payment (DNP)".
Customer Prevented	Customer has prevented the work from being undertaken	Not Completed. Where customer's objection relates to the use of comms, use 'Comms Refused'.
De-energisation Not Completed Due To A Re-energisation	De-energisation not completed due to a re-energisation for the same period.	Limited to a De-energisation ServiceOrderRequests with the status of 'Not Completed'.
Defect	A defect has been identified preventing the requested work from being completed.	Not Completed.
Demolished	For use when the Premises or metering installation has been demolished.	Not Completed.
Device Not Supported	The recipient does not support this device.	Not Completed
Documentation Not Provided	Documentation required for the completion of the requested work has not been provided. Details must be provided in *SpecialNotes*.	Not Completed.
Dog	An unrestrained dog was on the property.	Not Completed.
Inadequate infrastructure	Where significant work is required to provide supply work to the customer and no customer contact has been made to the Distributor.	Not Completed.
Incorrect Service Order	ServiceOrderRequest raised is not applicable for the work requested.	Not Completed.
Initiator Cancellation	Initiator cancellation (any charges for work partially completed should be indicated in *ProductCodes*).	Not Completed.
Life Support	Life Support Customer. Requested work not completed.	Not Completed
Meter Not Retrieved	Used in conjunction with a response to a Service Order Abolishment by a DNSP.	Limited to a Service Order Abolishment with the status of Partially Completed to indicate *Supply* was abolished, but the *meter* was unable to be recovered.
Meter Reading Only Undertaken Due To Prior Re-energisation	A Meter Reading only was taken, rather than the requested de-energisation, due to a prior re-energisation.	Completed.

Value	Definition	Used with ServiceOrderStatus
Metering not compatible with proposed Tariff Change	The Recipient is not able to complete the request due to the *meter* not being compatible proposed tariff.	Not Completed.
Metering Problem	*Metering* problem preventing completion of *Meter Reading*.	Partially Completed.
Mismatch with Standing Data	Standing Data in MSATS does not align with assets found at site.	Not Completed.
MSATS Exception	The requested change to MSATS Standing Data could not be completed. Note: The MSATS error code should be included in the SpecialNotes field	Not Completed
Natural Event	An event such as bushfire, flood or storm has restricted access to the site and / or prevented the requested work from being completed.	Not Completed.
New Customer On-Site	Customer at Site who claims to be a new customer.	Limited to De-energisation ServiceOrderRequests only with a status of 'Not Completed'.
No Access – Network Support Required	Network access issue - network is required to provide access – e.g network lock or network substation area.	Not Completed.
No Adult Present	An unaccompanied minor on site prevented the requested work from being completed.	Not Completed.
No Comms	Recipient unable to contact a remotely controlled device.	Not Completed.
No Supply	*Supply* not available.	Not Completed.
Not FRMP	Change in FRMP after ServiceOrderRequest has been raised.	Not Completed.
Obstruction	A structure, vegetation and/or other material is impeding safe access preventing the requested work from being completed.	Not Completed.
Other	Other reasons. Details must be provided in *SpecialNotes*.	Not Completed, Partially Completed.
Reading Problem	Reading problem preventing completion of Meter Reading.	Partially Completed.
Recipient Cancellation	Recipient cancellation. Details must be provided in *SpecialNotes*.	Not Completed.
Request Submitted By Another Initiator	Alternative Request received from another Participant.	Not Completed.
Sensitive Load	Sensitive load. Requested work not completed	Not Completed
Service Not Supported	The recipient does not support the service requested.	Not Completed.

Value	Definition	Used with ServiceOrderStatus
Shared Fuse - Scoping Required	Unable to perform the requested work because the isolation point is common with other customers and the Shared Fusing Meter Replacement Procedure is applicable.	Not Completed
Shared Supply Point	Unable to perform the requested work because the isolation point is common with other customers and the Shared Fusing Meter Replacement Procedure is not applicable.	Not Completed.
Site Already Energised	Customer Site is energised at the time of the ServiceOrderRequest.	Not Completed.
Site Not Ready	Site not ready for work requested.	Not Completed.
Tariff Change Not Approved	Request for a tariff change is not approved.	Not Completed.
Unable To Access	Customer is required to provide access – e.g indoors, locked environment, etc	Not Completed.
Unable to Commission Meter	The customer's metering device cannot be commissioned at this time. Further action required.	Not Completed.
Unable To Isolate	Unable to isolate supply to enable the requested work to be completed and the isolation point is not common with other customers.	Not Completed. For missing or defective customer equipment, use 'Defect'.
Unable To Locate Site	Unable to locate the site or metering installation.	Not Completed.
Unknown Connection Status	Recipient unable to determine connection status of a remotely controlled device.	Not Completed.
Unknown Load	The site draws a significant load when attempting re-energisation and was left deenergised for safety reasons.	Not Completed.
Unsafe	Unsafe to complete work.	Not Completed.

2.16 Specific service order requirements

2.16.1 Allocate NMI

a. This Service Order sub type must be used for a Site where the Retailer wants the Site registered in MSATS with them at the time of *NMI* creation.

b. By submitting the ServiceOrderRequest, the Retailer confirms they expect to be the Customer's Retailer as at the time of energisation.

c. On receipt of an Allocate NMI ServiceOrderRequest, the DNSP must allocate a *NMI* and issue it to the Retailer using a ServiceOrderResponse.

d. **[Guidance Note 1]** The DNSP must populate the Retailer who has issued the Allocate NMI ServiceOrderRequest as the FRMP in MSATS. The Retailer must not object to being allocated as the FRMP where they have lodged the ServiceOrderRequest.

e. Where a DNSP receives an Allocate NMI ServiceOrderRequest for a Site that a Connection point *NMI* has already been allocated, the DNSP must send a *BusinessAcceptance/Rejection* with a rejection message of "*NMI* already allocated for this address".

f. **[Guidance Note 1]** In those Jurisdictions where Paperwork is required, the Retailer and DNSP or NMI Sevice Provider must ensure that all necessary paperwork is available and completed in order to progress and complete the Allocate NMI. The ServiceOrderRequest does not replace the need for paperwork.

g. Not used in the NT Procedures

h. Not used in the NT Procedures

2.16.2 Re-energisation

a. The Retailer must:

   i. raise a ServiceOrderRequest to the appropriate party and use the *ServiceOrderSubType* to indicate the type of Re-energisation required; and

b. The Recipient must not reject a Re-energisation ServiceOrderRequest if the Site is already energised. The Recipient must return the appropriate ServiceOrderResponse and where possible provide a *Meter Reading*.

c. Where a Retailer raises a ServiceOrderRequest to a DNSP, the following provisions apply;

   i. **[Guidance Note 1]** For Type 6 metered sites, if there is no requirement to visit the Site to perform the Re-energisation (e.g. Customer removes sticker and switches the main switch on), the DNSP may use the last actual read if it is less than 6 weeks prior to the move-in date, or such other period as otherwise permitted by jurisdictional regulations. This read must be provided to the Retailer and MSATS as if an actual read occurred on the move-in date.

   ii. **[Guidance Note 1]** In order to avoid delay in Customer re-energisations, DNSPs should re-energise

   iii. For after-hours Re-energisations,

   - The Retailer must specify a *ServiceTime* of "Non-Business Hours" and must ensure the information in the *SpecialInstructions* field provides additional and specific information regarding the detail and reason for the "Non-Business Hours" request.
   - **[Guidance Note 1]** The DNSP must take into account the value in the *ServiceTime* field when scheduling the ServiceOrderRequest.
   - Indicates that the Retailer will accept any "Non-Business Hours" charges.
   - Where the Retailer does not wish to pay an after-hours fee a *ServiceTime* of "Business Hours" should be used. This indicates that the Retailer will not accept after-hours charges and will accept a delay in service completion (within the bounds of agreed service levels) in preference to undertaking the work after-hours.

- Where the Retailer prefers the work to be undertaken within business hours but is willing to pay the after-hours fee where necessary in order to speed up completion, a *ServiceTime* of "Any Time" should be used. This indicates that the Retailer will accept after-hours charges if the work needs to be undertaken outside business hours.
- **[Guidance Note 1]** DNSPs may refuse to complete a Re-energisation where there is no access to the main switch, Retailers should provide suitable advice to the Customer regarding turning off the main switch(es) to ensure safety of the premises when re- energised.

iv. Not used in the NT procedures

v. Not used in the NT Procedures.

2.16.3 De-energisation

a. The Retailer must:

i. issue a ServiceOrderRequest to the appropriate party and use the ServiceOrderSubType to indicate the type of De-energisation required; and

b. Where a Retailer issues the ServiceOrderRequest to the DNSP, the following provisions apply:

i. **[Guidance Note 1]** When the DNSP has access to perform the De-energisation but reasonably believes that there is a valid reason the De-energisation should not take place, the DNSP may contact the Retailer by phone and (within reason) act upon the instructions provided by the Retailer.

ii. Where payment is received by the Retailer before the ServiceOrderResponse is received, the Retailer must raise a cancellation ServiceOrderRequest, where the *ScheduledDate* is in the future. If urgent, the Retailer must communicate this to the DNSP immediately (e.g. by phone).

iii. **[Guidance Note 1]** The DNSP must not accept payment of any kind on behalf of the current Retailer. If payment is offered or discussion/dispute eventuates the DNSP's Disconnecting Officer may contact the Current Retailer for direction whilst at the premises. The Officer, not the Customer, should make this call.

iv. This Service Order type has Service Paperwork requirements in some Jurisdictions. See clause 2.14 for details regarding Service Paperwork processes.

2.16.4 De-energisation service orders and notifications for re-energisation

a. The obligations under this clause applies to:

i. *metering installations* that are COMMS4, COMMS4D, MRAM; and

ii. In jurisdictions where the DNSP and contestable MC are permitted to perform Re-energisation and De-energisation services; and

iii. Not used in the NT procedures.

b. The De-energisation Service Orders and Notifications for Re-energisation rules apply to any incomplete[3] De-energisation ServiceOrderRequests with *ScheduledDates* within a 5 business day period.

c. The key principles for the management of De-energisation Service Orders and Notifications for Re-energisation situations are:

   i. The Customer's interests take priority (i.e. minimising the risk of power being disrupted).

   ii. Each Initiator must use reasonable endeavours to minimise sending multiple conflicting ServiceOrderRequests for a single *NMI*.

d. Not used in the NT Procedures.

e. If the Recipient has cancelled the De-energisation ServiceOrderRequest they must send a corresponding ServiceOrderResponse transaction with a ServiceOrderStatus of 'Not Complete' and the ExceptionCode of "De-energisation Not Completed Due To A Re-energisation".

f. Not used in the NT Procedures.

2.16.5 Special read

a. **[Guidance Note 1]** Where necessary, prospective Retailers must initiate the transfer into MSATS within 2 business days of (or as required by the CATS Procedure or jurisdiction regulations) the date a Special Read ServiceOrderRequest is sent (that is related to a transfer). Where a Special Read has already occurred, the prospective Retailer must still initiate a transfer request in MSATS within 2 business days.

b. A Recipient must ensure that a ServiceOrderResponse to a Special Read ServiceOrderRequest does not have a *ServiceOrderStatus* of "Partially Complete".

2.16.6 Supply abolishment

a. **[Guidance Note 1]** The ServiceOrderRequest does not replace the need for the paperwork associated with a Supply Abolishment. This Service Order type has Service Paperwork requirements in some jurisdictions. See clause 2.14 for details regarding Service Paperwork processes.

b. Not used in the NT procedures

c. Not used in the NT procedures

2.16.7 Install meter, exchange meter, commission meter and install meter isolation device

a. When a participant raises a Metering Service Works ServiceOrderRequest, with a ServiceOrder*SubType* of 'Install Meter' or 'Exchange Meter', 'commission meter' the *RegClassification* is mandatory and must be populated as follows:

   i. **[Guidance Note 1]** 'Customer Initiated' value is to be populated when the ServiceOrderRequest relates to a customer initiated request.

   ii. **[Guidance Note 1]** 'Family Failure' value is to be populated when the ServiceOrderRequest relates to a notified family failure replacement.

iii. **[Guidance Note 1]** 'LMRP' value is to be populated when the ServiceOrderRequest relates to a Legacy Meter Replacement Plan.

iv. **[Guidance Note 1]** 'Malfunction' value is to be populated when the ServiceOrderRequest relates to an individual meter malfunction or failure.

v. **[Guidance Note 1]** 'New Meter Deployment' value is to be populated when the ServiceOrderRequest relates to a Retailer-Led deployment.

vi. **[Guidance Note 1]** 'One In All In' value is to be populated when the ServiceOrderRequest relates to an exchange after a MFIN received advising One In All In.

vii. **[Guidance Note 1]** 'Other' value is to be populated when the ServiceOrderRequest relates to a reason not listed. SpecialInstructions are Mandatory when used.

viii. **[Guidance Note 1]** 'Shared Fuse' value is to be populated when the ServiceOrderRequest relates to an exchange that is not One In All In, and the shared fuse is unable to be isolated at the meter.

b. Not used in the NT Procedures

c. Not used in the NT Procedures

2.16.8 Meter Exchange after being advised of defect resolution

a. Where an Initiator has been informed that an identified defect preventing a meter exchange has been resolved and wishes to arrange for a meter exchange, the Initiator must:

i. Raise a Metering Service Works ServiceOrderRequest with a ServiceOrderSubType of 'Exchange Meter' containing all mandatory and required fields

ii. **[Guidance Note 1]** Populate the *RegClassification* field with a value of 'Customer Initiated'.

iii. **[Guidance Note 1]** Populate the *PurposeOfRequest* field with 'Remediation Advised'.

2.16.9 DNSP coordinated temporary isolation

a. Where an Initiator requires an outage coordinated by the DNSP, they should raise a ServiceOrderRequest with a *ServiceOrderSubType* with one of the following: 'Temporary Isolation', 'Temporary Isolation-Group Supply', 'Temporary Isolation-Scoping Request' or 'Temporary Isolation-One In All In'.

i. **[Guidance Note 1]** Temporary Isolation must only be used to coordinate a planned outage where there is no shared supply point.

ii. **[Guidance Note 4]** Temporary Isolation-Group Supply must only be used where a planned outage is required at a site with a shared isolation point and the outage will affect multiple customers and the Shared Fusing Meter Replacement Procedure is **not** applicable.

iii. **[Guidance Note 4]** Temporary Isolation-Scoping Request must only be used where a planned outage is required at a site with a shared isolation point, the outage will affect multiple customers and the Shared Fusing Meter Replacement Procedure is applicable.

iv. **[Guidance Note 1]** Not used in the NT Procedures.

b. **[Guidance Note 1]** Where an Initiator raises a 'Temporary Isolation Scoping Request' they must populate the CoordinatingContactName field with the Original MC.

c. **[Guidance Note 1]** Not used in the NT Procedures.

d. Where the DNSP needs to reschedule a One In All In planned outage, the DNSP must provide a ServiceOrderResponse of 'Not Complete' for each affected 'Temporary Isolation-One In All In' ServiceOrderRequest, with an *ExceptionCode* of 'Recipient Cancellation' and a message advising a reschedule is to occur in *SpecialNotes*.

e. When the retailer receives the 'Not Complete' ServiceOrderResponse, in accordance with clause 2.16.9(d), they must cancel any associated Metering Service Works ServiceOrderRequest.

f. **[Guidance Note 1]** When the DNSP becomes aware that a retailer churn has occurred, the DNSP must send a ServiceOrderResponse of 'Not Complete' with an *ExceptionCode* of 'Not FRMP' for any Supply Service Works 'Temporary Isolation-One In All In' ServiceOrderRequest received from a retailer who is no longer the FRMP.

2.16.10 Update standing data

Not used in the NT procedures

2.17 Multiple service orders

a. The obligations under this clause apply to regulated businesses.

b. This section provides the business rules for the management of situations where multiple ServiceOrderRequests apply to a Site at, or close to, a point in time. The business rules are presented in a series of scenarios.

c. The multiple Service Order rules apply to any incomplete[3] ServiceOrderRequests with *ScheduledDates* within a 5 business day period.

d. The key principles for the management of multiple Service Order situations are:

i. The Customer's interests take priority (i.e. ensuring power is turned on in a timely manner/ not disrupted).

ii. Each Initiator must use reasonable endeavours to minimise sending multiple conflicting ServiceOrderRequests for a single *NMI*.

[3] Incomplete' means a ServiceOrderResponse has not been sent or the Recipient is unaware of the status of work that is currently in progress.

e. Where there is a physical Re-energisation and De-energisation received for the same *NMI*, the Recipient has the discretion to undertake a single *meter* reading. Scenarios 1-6, detailed in section 2.17.1.1, allow for this practice.

f. The scenarios, detailed in section 2.17.1.1, assume that the De-energisation ServiceOrderRequest has a *ConfirmedDe-energisation* value of "No".

   i. Where the *ConfirmedDe-energisation* value is "Yes" in the De-energisation ServiceOrderRequest, the situation will be treated by the Recipient as an exception to the rules in this section; and

   ii. **[Guidance Note1]** The Recipient must contact the Prospective Retailer (Initiator), who has raised a Re-energisation Request to assist in the resolution of the situation.

2.17.1 Multiple service orders for multiple initiators

a. In these scenarios, other Service Order Types that can be raised by a prospective Retailer (Initiator) and Re-energisations Service Orders are interchangeable. Where the multiple ServiceOrderRequests involve these other Service Order Types, the processes are the same as for Re-energisations and De-energisations.

Table 6 Multiple Service Order Scenarios

Scenario	1st Request Received	2nd Request Received	Description
1	De-energisation	Re-energisation	Re-energisation before De-energisation.
2	De-energisation	Re-energisation	Re-energisation date equals De-energisation date.
3	De-energisation	Re-energisation	Re-energisation after De-energisation.
4	Re-energisation	De-energisation	De-energisation before Re-energisation.
5	Re-energisation	De-energisation	De-energisation date equals Re-energisation date.
6	Re-energisation	De-energisation	De-energisation after Re-energisation.
7	Various (as per Table 7)	Various (as per Table 7)	Where two Service Orders are received and clarification is required from both parties.
8	Any Service Order	Matching Service Order	Multiple Service Orders of the same type in a 5business day window.
9	Any Service Order	Any Service Order	Any other multiple ServiceOrderRequest situations not covered by Scenario's 1-8 above.

b. The following Table 7 summarises the scenarios that apply to specific combinations of ServiceOrderRequests raised by current and prospective Retailers (Initiator). The numbers in each cell indicate which scenario applies to the specific combination. An "x" means the Recipient will reject the ServiceOrderRequest from the prospective Retailer, irrespective of whether it is received first or second.

c. Table 7 applies specifically to the services performed by DNSP's or DNSP's in their role as Initial MC.

d. This table describes how a DNSP/Initial MC should treat consecutive Service Orders received from prospective Retailers and current Retailers that are scheduled for action within 5 business days.

e. The transactions marked as "NA" are not applicable transactions for a DNSP following Metering Competition (they should be rejected).

Table 7 Summary of the management of multiple Service Order and multiple Retailer situations

Current Retailer			New Service Order	Transaction Type	Supply Service Works	Supply Service Works	Supply Service Works	Supply Service Works	Supply Service Works	Supply Service Works	Supply Service Works	Metering Service Works	Metering Service Works	Metering Service Works	Metering Service Works	Metering Service Works	Metering Service Works	Metering Service Works	Metering Service Works	Metering Service Works	Metering Service Works	Metering Service Works	Update Standing Data	Re-energisation	De-energisation	Special Read	Miscellaneous Services
		Subtype	Allocate NMI	Establish (Permanent/Temporary, etc.)	Supply Abolishment	Supply Alteration	Temporary Isolation - All	Tariff Change	Install Controlled Load	Change Timeswitch Settings	Commission Meter	Install Meter	Install Meter Isolation Device	Exchange Meter	Move Meter	Remove Meter	Meter Reconfiguration	Meter Investigation (Inspect or Test)	Reseal Device	All Subtypes	All Subtypes	All Subtypes	All Subtypes	All Subtypes	NO SUBTYPE - ignore if populated
Transaction Type	**Subtype**																									
Supply Service Works	Allocate NMI		8	X	N/A	X	X	X	X	X	X	X	X	X	X	X	X	N/A	X	X	X	N/A	X	N/A	N/A
Supply Service Works	Establish (Permanent/Temporary, etc.)		X	8	N/A	7	7	7	7	7	7	7	7	7	7	7	7	N/A	7	N/A	X	N/A	X	N/A	N/A
Supply Service Works	Supply Abolishment		X	X	N/A	7	7	7	7	7	7	7	7	7	7	7	7	N/A	7	N/A	7	N/A	8	N/A	N/A
Supply Service Works	Supply Alteration		X	X	N/A	7	7	7	7	7	7	7	7	7	7	7	7	N/A	7	N/A	9	N/A	9	N/A	N/A
Supply Service Works	Temporary Isolation - All		X	X	N/A	7	7	7	7	7	7	7	7	7	7	7	7	N/A	7	N/A	9	N/A	9	N/A	N/A
Supply Service Works	Tariff Change		X	X	N/A	7	7	7	7	7	7	7	7	7	7	7	7	N/A	7	N/A	9	N/A	9	N/A	N/A
Metering Service Works	Install Controlled Load		X	X	N/A	7	7	7	7	7	7	7	7	7	7	7	7	N/A	7	N/A	9	N/A	9	N/A	N/A
Metering Service Works	Change Timeswitch Settings		X	X	N/A	7	7	7	7	7	7	7	7	7	7	7	7	N/A	7	N/A	9	N/A	9	N/A	N/A
Metering Service Works	Commission Meter		N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Metering Service Works	Install Meter		N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Metering Service Works	Install Meter Isolation Device		N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Metering Service Works	Exchange Meter		N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Metering Service Works	Move Meter		X	X	N/A	7	7	7	7	7	7	7	7	7	7	7	7	N/A	7	N/A	9	N/A	9	N/A	N/A
Metering Service Works	Remove Meter		X	X	N/A	7	7	7	7	7	7	7	7	7	7	7	7	N/A	7	N/A	9	N/A	9	N/A	N/A
Metering Service Works	Meter Reconfiguration		X	X	N/A	7	7	7	7	7	7	7	7	7	7	7	7	N/A	7	N/A	9	N/A	9	N/A	N/A
Metering Service Works	Meter Investigation (Inspect or Test)		X	X	N/A	7	7	7	7	7	7	7	7	7	7	7	7	N/A	7	N/A	9	N/A	9	N/A	N/A
Metering Service Works	Reseal Device		X	X	N/A	7	7	7	7	7	7	7	7	7	7	7	7	N/A	7	N/A	9	N/A	9	N/A	N/A
Update Standing Data	All Subtypes		N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Re-energisation	All Subtypes		X	X	N/A	7	7	7	7	7	7	7	7	7	7	7	7	N/A	7	N/A	8	N/A	9	N/A	N/A
De-energisation	All Subtypes		X	X	N/A	7	7	7	7	7	7	7	7	7	7	7	7	N/A	7	N/A	1-6	N/A	9	N/A	N/A
Special Read	All Subtypes		X	X	N/A	7	7	7	7	7	7	7	7	7	7	7	7	N/A	7	N/A	9	N/A	9	N/A	N/A
Miscellaneous Services	NO SUBTYPE - ignore if populated		X	X	N/A	7	7	7	7	7	7	7	7	7	7	7	7	N/A	7	N/A	9	N/A	9	N/A	N/A

NTESMO

2.17.1.1 Scenario process description - Scenarios 1 – 6

a. Upon receipt of a Re-energisation Request and a De-energisation Request, the Recipient will:

   i. Accept the Re-energisation Request (having already accepted the De-energisation Request).

   ii. If the Recipient can cancel the de-energisation fieldwork, the Recipient will send a "Not Completed" ServiceOrderResponse to the De-energisation Request with an *ExceptionCode* indicating “De-energisation Not Completed Due To A Re-energisation".

   - If the Re-energisation field work associated with the Re-energisation Request is successful, the Recipient will

     > Send a "Completed" ServiceOrderResponse to the Re-energisation Request with a *meter* reading *ProductCode*.

   - If the Re-energisation field work associated with the Re-energisation Request is not successful:

     > Send a "Not Completed" ServiceOrderResponse to the Re-energisation Request with an *ExceptionCode* indicating the reason.

   iii. If the de-energisation fieldwork cannot be rationalised by the Recipient, the Recipient will:

   - Undertake the necessary field work to ensure that the final status of the Site is energised;

   - Send a ServiceOrderResponse to both ServiceOrderRequests to indicate the respective outcome of the fieldwork using the relevant *ExceptionCodes* and applicable *ProductCodes*.

b. If the Initiator who requested the De-energisation still requires the Site to be de-energised (having received a Response with an *ExceptionCode* indicating “De-energisation Not Completed Due To A Re-energisation”), the Initiator may raise a new ServiceOrderRequest with a *ConfirmedDe-energisation* value of “Yes”.

2.17.1.2 Scenario process description - Scenario 7

a. Upon receipt of ServiceOrderRequests from different Initiators, the Recipient will contact both parties to confirm/clarify the Requests.

2.17.1.3 Scenario process description - Scenario 8

a. This scenario covers situations of multiple ServiceOrderRequests of the same type. (These are usually Re-energisations).

b. If the new ServiceOrderRequest has a *ScheduledDate* greater than or equal to the existing ServiceOrderRequest.

   i. Reject the new ServiceOrderRequest with an *EventCode* indicating “Request submitted by another Retailer”.

   ii. Undertake the existing ServiceOrderRequest as scheduled.

c. If the new ServiceOrderRequest has an earlier *ScheduledDate* than the existing ServiceOrderRequest.

   i. Accept the new ServiceOrderRequest and schedule the work.

ii. Send a “Not Completed” ServiceOrderResponse to the first ServiceOrderRequest with an

ExceptionCode indicating “Request Submitted By Another Retailer.”

2.17.1.4 Scenario process description - Scenario 9

a. This scenario covers the remaining multiple ServiceOrderRequest situations not covered in the earlier scenarios.

b. Upon receipt of these ServiceOrderRequests, the Recipient will process each of the Requests.

2.17.2 Multiple service orders from same initiator

a. The following Table 8 New Service Order, Same Initiator summarises the specific combinations of ServiceOrderRequests that could potentially be raised by the same Initiator.

b. This table applies specifically to the services performed by DNSP's or DNSP's in their role as Initial MC. Upon receipt of a combination of multiple ServiceOrderRequests that are deemed valid per Table 8 New Service Order, Same Initiator (shown by a “✓” in the relevant cell), the Recipient will process both ServiceOrderRequests.

c. This table describes whether a DSNP/Initial MC should process a New Service Order for a given *NMI* when there is an Existing Service order scheduled for action within 5 business days. Upon receipt of a combination of multiple ServiceOrderRequests that are deemed invalid per the above table (shown by an “**x**” in the relevant cell), the Recipient will reject the new ServiceOrderRequest with an *EventCode* indicating “Invalid Multiple Service Order Combination”.

d. The transactions marked as "NA" are not applicable transactions for a DNSP (they should be rejected).

Table 8 New Service Order same Initiator

Current Retailer																									
Transaction Type	**Subtype**		Allocate NMI	Establish (Permanent/Temporary, etc.)	Supply Abolishment	Supply Alteration	Temporary Isolation - All	Tariff Change	Install Controlled Load	Change Timeswitch Settings	Commission Meter	Install Meter	Install Meter Isolation Device	Exchange Meter	Move Meter	Remove Meter	Meter Reconfiguration	Meter Investigation (Inspect or Test)	Reseal Device	All Subtypes	All Subtypes	All Subtypes	All Subtypes	NO SUBTYPE - ignore if populated
Supply Service Works	Allocate NMI		8	X	N/A	X	X	X	X	X	X	X	X	X	X	X	X	N/A	X	X	X	N/A	X	N/A
Supply Service Works	Establish (Permanent/Temporary, etc.)		X	8	N/A	7	7	7	7	7	7	7	7	7	7	7	7	N/A	7	N/A	X	N/A	X	N/A
Supply Service Works	Supply Abolishment		X	X	N/A	7	7	7	7	7	7	7	7	7	7	7	7	N/A	7	N/A	7	N/A	8	N/A
Supply Service Works	Supply Alteration		X	X	N/A	7	7	7	7	7	7	7	7	7	7	7	7	N/A	7	N/A	9	N/A	9	N/A
Supply Service Works	Temporary Isolation - All		X	X	N/A	7	7	7	7	7	7	7	7	7	7	7	7	N/A	7	N/A	9	N/A	9	N/A
Supply Service Works	Tariff Change		X	X	N/A	7	7	7	7	7	7	7	7	7	7	7	7	N/A	7	N/A	9	N/A	9	N/A
Metering Service Works	Install Controlled Load		X	X	N/A	7	7	7	7	7	7	7	7	7	7	7	7	N/A	7	N/A	9	N/A	9	N/A
Metering Service Works	Change Timeswitch Settings		X	X	N/A	7	7	7	7	7	7	7	7	7	7	7	7	N/A	7	N/A	9	N/A	9	N/A
Metering Service Works	Commission Meter		N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Metering Service Works	Install Meter		N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Metering Service Works	Install Meter Isolation Device		N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Metering Service Works	Exchange Meter		N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Metering Service Works	Move Meter		X	X	N/A	7	7	7	7	7	7	7	7	7	7	7	7	N/A	7	N/A	9	N/A	9	N/A
Metering Service Works	Remove Meter		X	X	N/A	7	7	7	7	7	7	7	7	7	7	7	7	N/A	7	N/A	9	N/A	9	N/A
Metering Service Works	Meter Reconfiguration		X	X	N/A	7	7	7	7	7	7	7	7	7	7	7	7	N/A	7	N/A	9	N/A	9	N/A
Metering Service Works	Meter Investigation (Inspect or Test)		X	X	N/A	7	7	7	7	7	7	7	7	7	7	7	7	N/A	7	N/A	9	N/A	9	N/A
Metering Service Works	Reseal Device		X	X	N/A	7	7	7	7	7	7	7	7	7	7	7	7	N/A	7	N/A	9	N/A	9	N/A
Update Standing Data	All Subtypes		N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Re-energisation	All Subtypes		X	X	N/A	7	7	7	7	7	7	7	7	7	7	7	7	N/A	7	N/A	8	N/A	9	N/A
De-energisation	All Subtypes		X	X	N/A	7	7	7	7	7	7	7	7	7	7	7	7	N/A	7	N/A	1-6	N/A	9	N/A
Special Read	All Subtypes		X	X	N/A	7	7	7	7	7	7	7	7	7	7	7	7	N/A	7	N/A	9	N/A	9	N/A
Miscellaneous Services	NO SUBTYPE - ignore if populated		X	X	N/A	7	7	7	7	7	7	7	7	7	7	7	7	N/A	7	N/A	9	N/A	9	N/A

2.18 Multiple service orders sent to the metering provider

a. The obligations under this clause apply to non-regulated businesses.

b. These multiple Service Order rules apply to any new or incomplete[4] ServiceOrderRequests with *ScheduledDates* within a 5 business day period.

c. The key principles for management of multiple Service Order situations are:

   i. The Customer's interests take priority (i.e. ensuring power is not disrupted).

   ii. Each Initiator must use reasonable endeavours to minimise sending multiple conflicting ServiceOrderRequests for a single *NMI*.

3 Timing requirements

3.1 Overview of timing requirements

a. The Timing Requirements ensure that works are completed and provide a reasonable opportunity for Participants to process and respond to transactions that require manual intervention (where requests have *SpecialInstructions,* for example).

b. The Timing Requirements do not take precedence over Jurisdictional requirements and any contract service levels agreed between Participants.

c. Figures 3 and 4 illustrate the relevant Timing Requirements.

[4] Incomplete' means a ServiceOrderResponse has not been sent or the Recipient is unaware of the status of work that is currently in progress.

Figure 3 Timing Overview


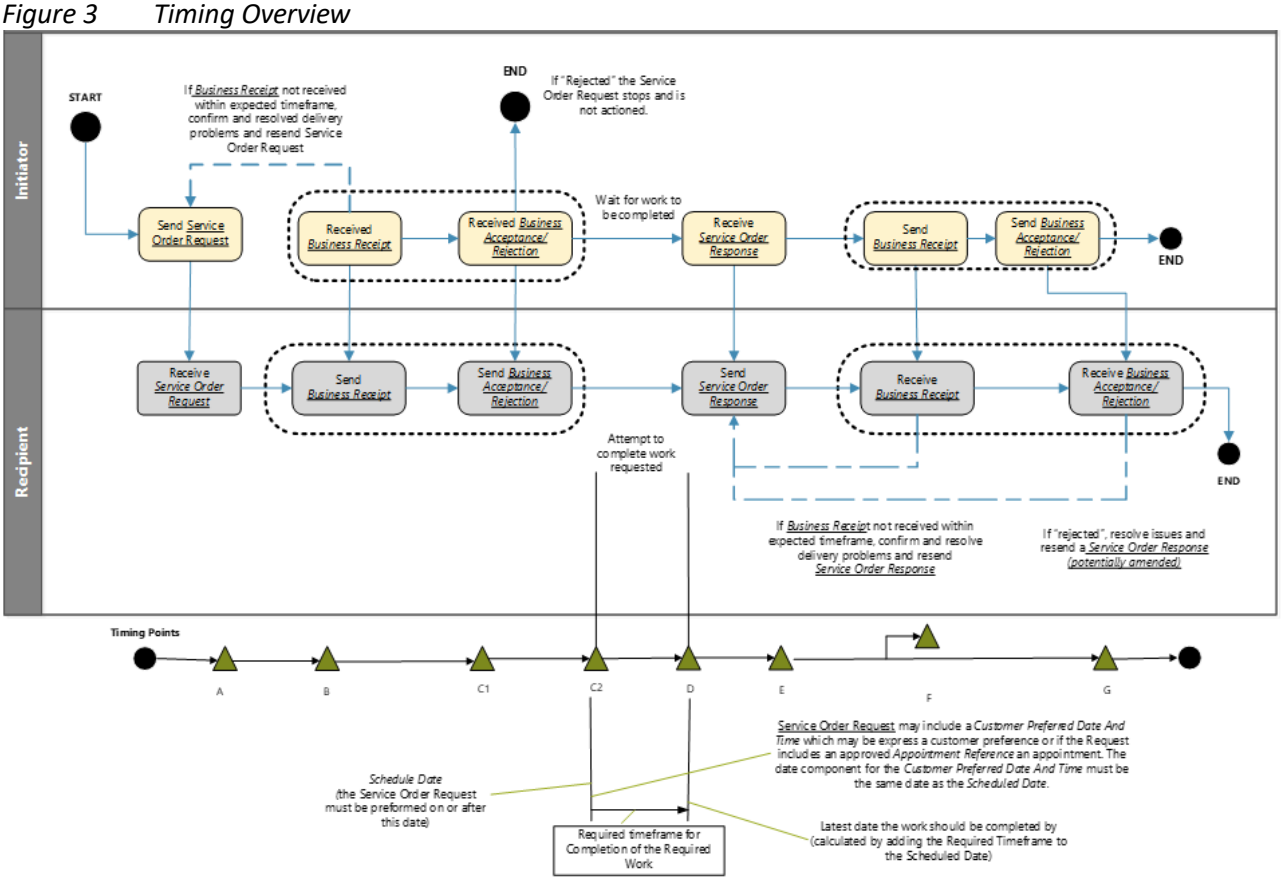


Figure 4 Timing for completion of work

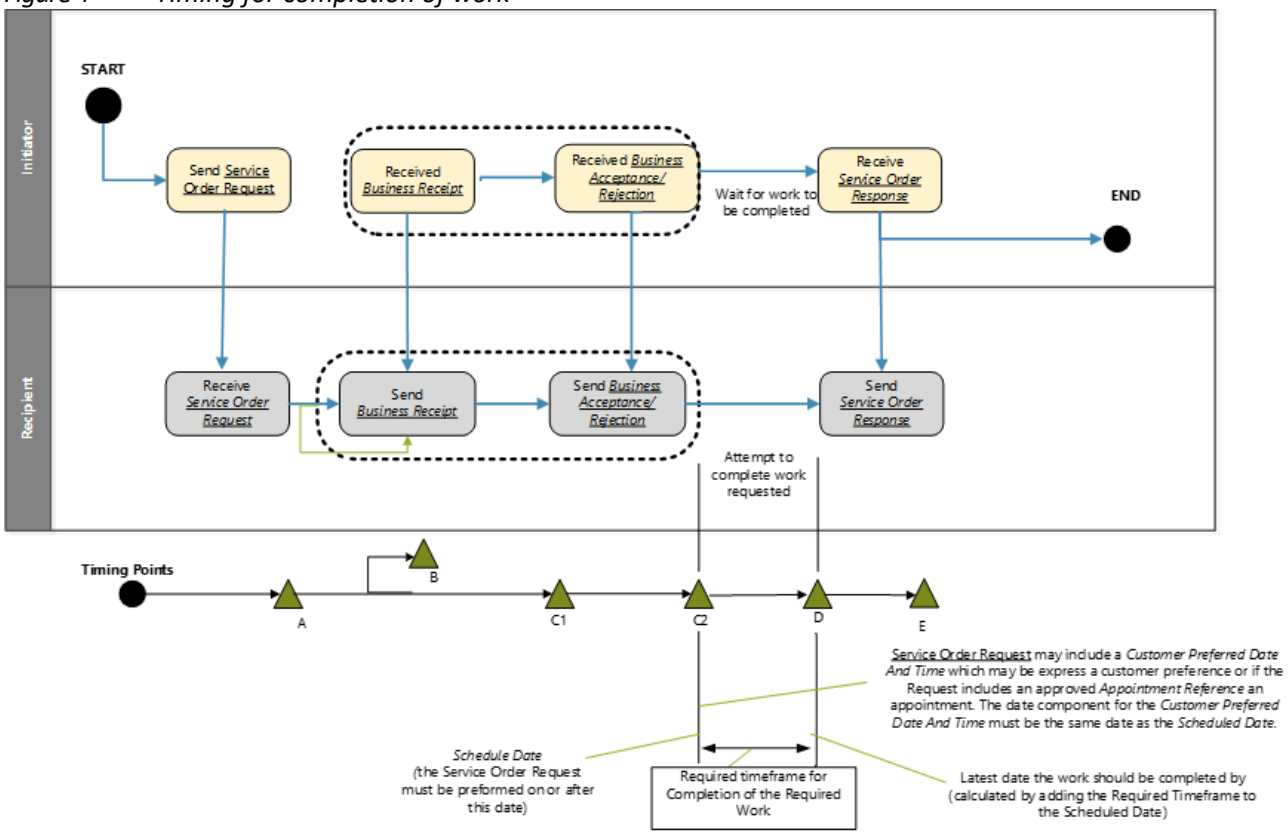

3.2 Definition of timing points and timing periods

3.2.1 Timing points

a. The definitions in Table 9 Timing Point Definitions below apply:

Table 9 Timing Point Definitions

Timing Point	Definition
A	When the Initiator issues a ServiceOrderRequest.
B	When the Initiator receives a *BusinessReceipt* for a ServiceOrderRequest from the Recipient.
C1	When the Initiator receives a *BusinessAcceptance/Rejection* for a ServiceOrderRequest from the Recipient.
C2	This point is the *ScheduledDate* in the ServiceOrderRequest.
D	This timing point is when the work requested has been completed, or has been attempted. This point is the *ActualDateAndTime* in the ServiceOrderResponse.
E	This timing point is when the Recipient sends a ServiceOrderResponse following the completion of the work requested. The work request can be completed, partially completed or not completed.
F	When the Recipient receives a *BusinessReceipt* for a ServiceOrderResponse from the Initiator.
G	When the Recipient receives a *BusinessAcceptance/Rejection* for the ServiceOrderResponse from the Initiator.

3.2.2 Use of timing periods

a. The definitions in Table 10 Timing Period Definitions below apply:

Table 10 Timing Period Definitions

Timing Period	Definition	Usage
Initiation Period	This is from the Customer's request to the Initiator to the sending of the ServiceOrderRequest by the Initiator. Timing Point A is the end of this period.	Monitored by the Initiator to ensure that regulated or bi-laterally agreed requirements are being achieved.
Notice Period	This is from the sending of the ServiceOrderRequest by the Initiator to the *ScheduledDate* in the ServiceOrderRequest. Commences at Timing Point A and ends at Timing Point B.	Monitored to ensure that any regulated or bi- laterally agreed requirements are being achieved.
***BusinessReceipts* for Requests**	This is the period from the sending of the ServiceOrderRequest by the Initiator to the receipt of the *BusinessReceipt* for the ServiceOrderRequest from the Recipient. Timing Points A and B define this period.	Used by the Initiator to determine whether a ServiceOrderRequest has been received and can be read. Where the *BusinessReceipt* has not been received before the expiry of this period, the Initiator may escalate non-receipt.
***BusinessAcceptance/Rejection* for Requests**	This is the period from the sending of the ServiceOrderRequest by the Initiator to the receipt of the *BusinessAcceptance/Rejection* for the ServiceOrderRequest from the Recipient. This must be on or before the *ScheduledDate* in the ServiceOrderRequest. Commences at Timing Point A and ends at Timing Point C1.	Used by the Initiator to determine whether a ServiceOrderRequest has been accepted. If the *BusinessAcceptance/Rejection* has not been received before the expiry of this period, the Initiator may escalate the non- acceptance/rejection.
Completion of the Requested Work	This is from the *ScheduledDate* in the ServiceOrderRequest to the completion of the requested work (or attempted completion) by the Recipient (the *ActualDateAndTime* in the ServiceOrderResponse). Commences at Timing Point C2 and ends at Timing Point D.	This period represents the timeframe for the performance of the work requested (either where a regulatory or bi-laterally agreed timeframe exists). Used by the Initiator and Recipient to monitor achievement of Timing Requirements.
Issuing a ServiceOrderResponse	This is from completion of the requested work (or attempted completion) (the *ActualDateAndTime* in the ServiceOrderResponse) and the sending of the ServiceOrderResponse by the Recipient. Commences at Timing Point D and ends at Timing Point E.	If the ServiceOrderResponse has not been received before the expiry of this period, the Initiator may escalate the non-receipt.
***BusinessReceipts* for Responses**	This is the period from the sending of the ServiceOrderResponse by the Recipient to the receipt of a *BusinessReceipt* for the ServiceOrderResponse from the Initiator. Timing Points E and F define this period.	Used by the Recipient to determine whether a ServiceOrderResponse has been received and can be read. If the *BusinessReceipt* has not been received before the expiry of this period,

Timing Period	Definition	Usage
		the Recipient may escalate non-receipt.
BusinessAcceptance/Rejection **for Responses**	This is the period from the sending of the ServiceOrderResponse by the Recipient to the receipt of a *BusinessAcceptance/Rejection* for the ServiceOrderResponse from the Initiator. Commences at Timing Point F and ends at Timing Point G.	Used by the Recipient to determine whether a service response has been accepted by the Initiator and can be "closed". If the *BusinessAcceptance/Rejection* has not been received before the expiry of this period, the Recipient may escalate the non-receipt.

3.3 Specific timing requirements

a. The information in this section summarises the Timing Requirements for various regulated activities provided by the DNSP only. Users of this document should refer to the relevant jurisdictional regulatory documents for details of the exact requirements.

Table 11 Notice Period Table

Service Request	Notice Period
Supply Service Works	No specific requirement.
Re-energisation	The DNSP must receive a valid Request for a same business day Re-energisation by: a) by 3:00pm in Northern Territory For same business day, **after hours** Re-energisations, the DNSP must receive a valid Request: a) by 5:30pm in Northern Territory For **next business day** Re-energisations, the DNSP must receive a valid Request on a business day: a) by 5:00pm in Northern Territory,
De-energisation	To carry out the work in the required timeframe from the day of the receipt of the request the DNSP must receive a valid Request by: a) In NT, if logged by 3:00pm the day prior to the scheduled date The DNSP will not disconnect the premises during the following times ('the protected period'): I. on a business day before 8.00am or after 3.00pm; or II. if you are being disconnected for a failure to pay on a Friday or the day

Service Request	Notice Period
	before a public holiday; or III. on a weekend or a public holiday; or IV. if you are being disconnected for a failure to pay on the days between 20 December and 1 January (both inclusive) in any year; or V. if you are being disconnected for a failure to pay, during an extreme weather event.
Special Read	a) In the NT: The Notice Period is 3 days if lodged by 3pm.
Metering Service Works	There is no notice period.
Meter Reconfiguration	There is no notice period.
Meter Investigation	There is no notice period.
Supply Abolishment	There is no notice period.
Miscellaneous	There is no notice period.

3.3.1 Timing requirement for *BusinessReceipts* for requests

a. The Timing Requirement for the *BusinessReceipt* is set out in the NTESMO B2B Procedure Technical Delivery Specification.

3.3.2 Timing requirement for *BusinessAcceptance/Rejection* for requests

a. The Timing Requirement for the *BusinessAcceptance/Rejection* is set out in the NTESMO B2B Procedure Technical Delivery Specification.

3.3.3 Timing requirement for completion of the requested work

a. Table 12 summarises the Required Timeframe within which DNSPs must use reasonable endeavours to complete each type of ServiceOrderRequest.

b. The commencement of this Timing Requirement is once the associated Service Paperwork has been received by the DNSP and/or all preconditions have been met (not when the ServiceOrderRequest is received).

c. The Required Timeframes for Completion of the Requested Work:

   i. These apply to regulated businesses.

   ii. Do not apply to *NMI*s with a *NMI* Classification code in MSATS of “Large”.

Table 12 Timing Period for completion of work

Service Request	Required timeframe
Allocate NMI	Allocation of a NMI is to occur within twobusiness days of receiving a request.
Supply Service Works	The following timeframes apply for establishing a new *supply* connection (Establish Temporary, Establish Temporary In Permanent & Establish Permanent): New connection of a premises in a Central Business District area or urban area (excluding connection requiring network extension or augmentation) – within five business days of receipt of a valid electrical certificate of compliance from the Retailer/Customer, or as otherwise agreed with the Retailer/Customer. New connection of a premises in a Rural area (excluding connection requiring network extension or augmentation) – within 10 business days of receipt of a valid electrical certificate of compliance from the Retailer/Customer, or as otherwise agreed with the Retailer/Customer. The Network Service Provider must give the Retailer three business day's notice of when the Network Service Provider expects the connection will be completed.
Re-energisation	Re-energisation of existing premises – within one business day of receipt by the Network Service Provider of a valid ServiceOrderRequest from the Retailer.
De-energisation	De-energisation of existing premises – within one business day of receipt by the Network Service Provider of a valid ServiceOrderRequest from the Retailer.
Special Read	**[Guidance Note 1]** Use reasonable endeavours to obtain a Meter Read within the three business day's timeframe which applies for Special Reads or within such other time period as specified in the relevant transfer rules or jurisdictional regulatory instruments.
Metering Service Works	No timeframes, or as agreed with the contractor.
Meter Reconfiguration	The following timeframe applies for Meter Reconfigurations: a) **[Guidance Note 1]** All jurisdictions 20 Business Days
Miscellaneous	The timeframe depends on the work requested and may be subject to commercial negotiation between parties.

3.3.4 Timing requirement for issuing a ServiceOrderResponse

a. The DNSP must send a ServiceOrderResponse to an Allocate NMI ServiceOrderRequest within two business days of receiving the ServiceOrderRequest.

b. For all other ServiceOrderRequests, the Recipient must send a ServiceOrderResponse within five business days of completing the work requested.

3.3.5 Timing requirement for *BusinessReceipts* for responses

a. The Timing Requirement for the *BusinessReceipts* is set out in the NTESMO B2B Procedure Technical Delivery Specification.

3.3.6 Timing requirement for *BusinessAcceptance/Rejection* for responses

a. The Timing Requirement for the *BusinessAcceptance/Rejection* is set out in the NTESMO B2B Procedure: Technical Delivery Specification.

4 Transactions

a. Participants must ensure that each Transaction complies with the usage, definitional and format rules detailed in the Table 13, Table 14, Table 15 and Table 16 below.

b. A participant cannot reject a Service Order Request or Response simply because the Initiator populates a field that is non-mandatory or not required denominated by “N” in the following tables:

4.1 ServiceOrderRequest transaction data

Table 13 Service Order Request Field Description and Format

Field	Format	Definition	Required for a “Cancel” ServiceOrderRequest
ActionType	VARCHAR(7)	A code used to indicate the Service Order action: New = new ServiceOrderRequest. Cancel = cancel a previously raised ServiceOrderRequest. Replace = replacement. ServiceOrderRequest for an incorrectly rejected ServiceOrderRequest.	-
ServiceOrderID	VARCHAR(15)	Initiator defined, used for tracking. Must be a previously sent number if the *ActionType* = “Cancel”. Otherwise (*ActionType* = “New” or “Replace”) must be a new (unused) number, unique for the Initiator/Recipient combination.	Yes
InitiatorID	VARCHAR(10)	Initiator’s Participant ID.	Yes
RecipientID	VARCHAR(10)	Recipient’s Participant ID.	Yes
NotifiedPartyID	VARCHAR(10)	Not used in the NT Procedures	-

Table 13a Work Request Information

Field	Format	Definition	Required for a "Cancel" ServiceOrderRequest
ServiceOrderType	VARCHAR(22)	Code indicating type of ServiceOrderRequest: Supply Service Works; Re-energisation; De-energisation Special Read; Metering Service Works; Miscellaneous Update Standing Data	No
ServiceOrderSubType	VARCHAR(40)	Supply Service Works allowable values: Allocate NMI; Supply Abolishment; Supply Alteration Tariff Change; Establish Temporary Supply; Establish Temporary In Permanent Establish Permanent Supply; Temporary Isolation–Scoping Request; Temporary Isolation Temporary Isolation–Group Supply; Temporary Isolation–One In All In Re-Energisation allowable values: After Disconnection For Non-Payment; Remote; Retrospective Move-in New Reading Required; Physical Visit; Move-in Recipient Discretion De-Energisation allowable values Remove Fuse; Remote; Local Meter Disconnection Recipient Discretion; Disconnect at Pillar-Box Pit Or Pole-Top Metering Service Works allowable values: Install Controlled Load; Move Meter; Install Meter Install Meter Isolation Device; Remove Meter; Exchange Meter Meter Reconfiguration; Meter Investigation-Inspect; Meter Investigation-Test Change Timeswitch Settings; Reseal Device; Commission Meter Special Read allowable values:	No

Field	Format	Definition	Required for a "Cancel" ServiceOrderRequest
		Check Read Final Read	
Escalation	VARCHAR(40)	Used to indicate the Service Order is to be prioritised over other ServiceOrderRequests. Initiator and Recipient must agree the circumstances and indicator to be used. Allowable values are: Complaint Ombudsman VIP No Supply Other Where "Other" is used, *Specialinstruction* should contain a code that is agreed between the Initiator and Recipient e.g. [PRIORITY=abc] If the field is unpopulated, it should be assumed that the escalation level of the transaction is 'Normal'. Not Required when a Distributor is the Recipient of a ServiceOrderRequest. If 'Other' is selected, it is Mandatory to provide details in *SpecialInstructions*.	
ExemptionCode	VARCHAR(40)	AEMO assigned malfunction exemption code. Used to communicate the exemption code that the MC has been allocated to the MP. Not Required when a Distributor is the Recipient of a ServiceOrderRequest.	No
De-EnergisationReason	VARCHAR(40)	Allowed values indicating the reason for De-Energisation: Customer Requested Move Out Defect Non-Payment (DNP) Unauthorised Usage (DNI) Breach of Contract Illegal Usage No Access Site Works Safety Other If 'Other' is selected, it is Mandatory to provide details in *SpecialInstructions*.	No
ConfirmedDe-energisation	YESNO	Allowed values are: "No" = Default value. The normal business rules regarding De-energisation apply. "Yes" = Used only where the Retailer has confirmed with the Customer that the Customer details in the ServiceOrderRequest are accurate.	No

Field	Format	Definition	Required for a "Cancel" ServiceOrderRequest
		The value of "Yes" can only be used by the Retailer where the earlier De-energisation Request was not performed by the Recipient due to a Re-energisation Request from another Retailer.	
MeterSerialNumber	VARCHAR(12)	A Meter Serial ID. Not required where requested work affects all *meters* (refer to the B2B Guide for further details). This field repeats to allow provision of details for multiple meters.	
NMI	CHAR(10)	NMI. Not Mandatory where ServiceOrder*SubType* is 'Allocate NMI'.	-
NMIChecksum	CHAR(1)	NMI Checksum.	-
PurposeOfRequest	VARCHAR(40)	Use to clearly indicate the purpose of the request – allowable values: Additional Meter / Bidirectional flows at premises / Bypassed Customer Communications Install / Communications Remove / Fault New Connection / None / Other Part of BTS Temp to Perm / Part of supply alteration / Remediation Advised Retailer Led / Revenue Protection / Site Abolishment Customer Requested / Service Not Required Not Required when a Distributor is the Recipient of a ServiceOrderRequest. 'Remediation Advised' must be populated and used to inform the Recipient that the customer has advised the defect has been remediated. If 'Other' is selected, it is Mandatory to provide details in SpecialInstructions.	No
RegClassification	VARCHAR(40)	Use to indicate whether it is customer Initiated and regulatory timeframes apply, or not. Customer Initiated / Family Failure / LMRP / Malfunction New Meter Deployment / One In All In / Other / Shared Fuse Mandatory for Metering Service Works *SubTypes* - Install Meter, Exchange Meter, Commission Meter and Install Meter Isolation Device.	-

Field	Format	Definition	Required for a "Cancel" ServiceOrderRequest
		Not Required when a Distributor is the Recipient of a ServiceOrderRequest. If 'Other' is selected, it is Mandatory to provide details in SpecialInstructions.	
SpecialInstructions	VARCHAR(240)	Any special instructions the Initiator wishes to convey to the Recipient. Mandatory where: • A value of 'Yes' is used in *CustomerConsultationRequired*. • A value of "Other Multi-phase" is used in *SupplyPhases*. • A value of "Other" is used in *MeteringRequired*. • If *ActionType* = "Replace". • Necessary to support exceptional arrangements for urgent (high priority) ServiceOrderRequests. • *ServiceOrderType* = "Supply Service Works "and any tariff or metering requirements are not already provided. • *ServiceOrderType* = "Metering Service Works" and any tariff, metering requirements or any other special requirements need to be advised. • *Not used in the NT Procedures* • ServiceOrderType = "Metering Service Works" and *RegClassification* = 'One In All In' and must, as the first characters of this field, be populated with the OIAI Duration with an end delimiter of # • *ServiceTime* = "Non-Business Hours". This information does not replace information previously provided in a SiteAccessNotification.	-

Table 13b Site Information

Field	Format	Definition	Required for a "Cancel" ServiceOrderRequest
AccessDetails	VARCHAR(160)	Where the Customer has supplied special access details, the Retailer must provide these, describing fully the access details, without using abbreviations. Standard values • "Customer Reports No Access Requirements" • "Not Known To Initiator" • <Description of access requirement> Refer B2B Procedure: Customer and Site Details Notification for more information. This information does not replace information previously provided in a SiteAccessNotification.	No
AverageDailyLoad	NUMBER(10)	Estimated load value in kWh.	No
ChangeRequestFieldName	VARCHAR2(64)	Used to indicate which MSATS Standing Data field the Initiator is requesting to be updated. Refer to 'MSATS Principles and obligations for all connection points' for enumerations	No
ChangeRequestValueRequired	VARCHAR2(240)	Used to indicate the value or status of the MSATS Standing Data field that the Initiator is requesting be updated. This should be a valid value or status of the Standing Data element.	No
EffectiveDate	DATE	Used to indicate the date that the change in Standing Data is required to be effective in MSATS	No
EmbeddedNetworkParentName	VARCHAR(10)	Valid MSATS Parent identifier.	No
Not used in the NT Procedures			
Not used in the NT Procedures			
HazardDescription	VARCHAR(100)	Description of any hazards associated with the Site. This field repeats to allow the reporting of multiple hazards. Refer B2B Procedure: Customer and Site Details Notification for the list of codes.	No

Field	Format	Definition	Required for a "Cancel" ServiceOrderRequest
		This information does not replace information previously provided in a SiteAccessNotification.	
Not used in the NT Procedures			
Not used in the NT Procedures			
Not used in the NT Procedures			
ServiceOrderAddress	ADDRESS (Structured)	Site address where the requested work is to be done and must be in the structured format. This field is Mandatory for an Allocate NMI.	No

Table 13c Schedule Information

Field	Format	Definition	Required for a "Cancel" ServiceOrderRequest
AppointmentReference	VARCHAR(15)	Where an Appointment has been agreed between all parties, for example; the Initiator, Customer and Recipient.	No
CustomerAgreedStartDate	DATE	The earliest date for the provision of the service as agreed between the Initiator and customer. Not Required when a Distributor is the Recipient of a ServiceOrderRequest.	No
CustomerAgreedEndDate	DATE	The last date for the provision of the service as agreed between the Initiator and customer. Not Required when a Distributor is the Recipient of a ServiceOrderRequest.	No
ScheduledDate	DATE	The work requested must be performed on or after this date.	No

Field	Format	Definition	Required for a "Cancel" ServiceOrderRequest
ServiceTime	VARCHAR(40)	*Indicates the time the work is to be performed. Allowed values:* *Any Time* *Business Hours* *Non-Business Hours*	No
Co-ordinatingContactName	PERSONNAME	It is mandatory to populate this field with the *Original MC* when: • ServiceOrderSubType is Temporary Isolation-Scoping Request; or • Service order type is Metering Service Works and *RegClassification* is One In All In; • and the MC Participant ID must be provided in the *PersonNameFamily* element	No
Co-ordinatingContact TelephoneNumber	TELEPHONE	Contact telephone number of co-ordinating party. A maximum of three telephone numbers may be provided. Mandatory where *ServiceOrderCo-ordinationRequired* is YES.	No
CustomerConsultationRequired	YESNO	Yes = Where the Recipient is requested to consult with the Customer arrangements for the completion of the work requested. Where 'Yes' is used, the reason for the need to consult must be provided in *SpecialInstructions*. "No" = where no such consultation arrangements are required.	No
CustomersPreferredDateAndTime	DATETIME	Preferred date and time for the work to be undertaken. This is the Appointment time if an *AppointmentReference* is provided. Mandatory for 1. Re-energisation ServiceOrderRequests if the *ServiceOrderSubType* is *Retrospective Move-In*; and 2. Metering Service Works with *RegClassification* 'One In All In'; and 3. Supply Service Works with *ServiceOrderSubType* 'Temporary Isolation-One In All In'	No
InitiatorContactName	PERSONNAME	Contact name for Initiator.	No
InitiatorContactTelephoneNumber	TELEPHONE	Contact telephone number of Initiator contact. A maximum of three telephone numbers may be provided.Only mandatory where *InitiatorContactName* is populated.	No

Field	Format	Definition	Required for a "Cancel" ServiceOrderRequest
InstallationType	VARCHAR(30)	Code indicating the type of installation required: Underground Overhead Underground To Overhead Mains Overhead To Underground Mains Transformer Overhead Transformer Ground Level	No

Table 13d Meter Installation Information

Field	Format	Definition	Required for a "Cancel" ServiceOrderRequest
MaximumDemand	NUMBER(4)	Maximum demand (in kW) in accordance with *Australian Standard* AS3000 (calculated at 230 V).	No
NMIStatusCode	CHAR(1)	Status Code that the NMI is to become after completion of the Service Order. Allowed values defined in MSATS CATS Procedures Principles and Obligations.	No
MeteringRequired	VARCHAR(240)	New type of metering required, for example: HV Metering Export only LV CT Metering Export only Three Phase Whole Current Export only Single Phase Export only Single Phase Multi Element Export only HV Metering Export & Import LV CT Metering Export & Import Three Phase Whole Current Export & Import	No

Field	Format	Definition	Required for a "Cancel" ServiceOrderRequest
		Single Phase Export & Import Single Phase Multi Element Export & Import See Note 1 Other Note 1: Not used in the NT procedures If 'Other' is selected, it is Mandatory to provide details in *SpecialInstructions*.	
MeterInstallCode	CHAR(8)	This value must correspond to a valid Meter Installation Type Code as referenced in MSATS Procedures: Principles and Obligations for all Connection Points Mandatory for COMMS9 and COMMS9CM	No
REC-AttendanceRequired	YESNO	Does Electrical Contractor need to be present when the Recipient performs the field work? "Yes" means REC is required to be present. "No" means REC is not required to be present	No
REC-BusinessName	BUSINESSNAME	Registered Electrical Contractor's business name	No
REC-ID	VARCHAR(20)	Registered Electrical contractor's ID/licence number.	No
REC-Name	PERSONNAME	Registered electrical contractor's name.	No
REC-Telephone	TELEPHONE	Registered Electrical contractor's telephone number. A maximum of three telephone numbers may be provided.	No
OffPeakRequirements	VARCHAR(240)	Details of any off-peak requirements, For Example: Space heating Climate saver Hot water Pool Pump	No

Field	Format	Definition	Required for a "Cancel" ServiceOrderRequest
ProposedTariff	VARCHAR(10)	The new Network Tariff required by the Initiator. Allowed values are the Network's Tariff Code as approved by the Regulator and recorded in MSATS at the Meter register ID level. The field can be repeated as necessary where multiple tariffs are required.	No
ServiceOrderCo-ordinationRequired	YES/NO	Yes = Where the Initiator has made arrangements regarding co-ordination for the completion of the work requested. "No" = where no such arrangements have been made. Not Required for a "Cancel" ServiceOrderRequest unless *SpecialInstructions* provided.	-
SupplyPhases	VARCHAR(20)	Code indicating number of phases supply is to support: 1-phase 2-phase 3-phase Other Multi-phase Unknown If "Other Multi-phase" used, further details must be provided as *SpecialInstructions*.	No
SwitchingServiceRequired	VARCHAR(8)	*Recipient* expected to provide and install a switching service (e.g. timeswitch or ripple controller) For Example: In the meter External to the meter	No

Table 13e Customer Information

Field	Format	Definition	Required for a "Cancel" ServiceOrderRequest
CustomerContactName	PERSONNAME	Contact name of Customer or their agent, where Recipient may need to contact that person. Mandatory where *CustomerConsultationRequired* is YES	No
CustomerContactTelephoneNumber	TELEPHONE	Contact telephone number of Customer/agent. A maximum of three telephone numbers may be provided. Mandatory where *CustomerConsultationRequired* is YES	No
CustomerNotificationAddress	ADDRESS	Customer postal address used for the purposes of a *retailer planned interruption* notice when the *CustomerNotificationMethod* is 'Post' Not Required when a Distributor is the Recipient of a ServiceOrderRequest.	No
CustomerNotificationEmail	VARCHAR(100)	Customer email address used for the purposes of a *retailer planned interruption* notice when the *CustomerNotificationMethod* is 'E-Mail' Not Required when a Distributor is the Recipient of a ServiceOrderRequest.	No
CustomerNotificationMethod	VARCHAR(40)	This is the method by which the notice of interruption to the customer is to be delivered. This is used when the Recipient is to issue the notice on behalf of the Initiator. Allowable values are: Post Phone Waiver SMS Email Not Required when a DNSP is the Recipient of a ServiceOrderRequest. If 'E-mail' is selected, it is Mandatory to provide details in *CustomerNotificationEmail*. If 'Post' is selected, it is Mandatory to provide details in *CustomerNotificationAddress*. If 'Phone' or 'SMS' are selected, it is Mandatory to provide details in *CustomerContactTelephoneNumber.*	No -

Field	Format	Definition	Required for a "Cancel" ServiceOrderRequest
		If 'Waiver' is selected, it is Mandatory to populate *CustomerAgreedStartDate* & *CustomerAgreedEndDate* or *CustomerPreferredDate*	
CustomerType	VARCHAR(60)	Code indicating Customer type. Allowed values: Industrial Commercial Residential Farm Lighting NCONUML	No
LifeSupport	YESNO	This value applies where a customer relies on life support equipment. This field indicates whether or not there are potential health or safety issues with loss of supply of the *Connection Point*. This information does not replace information provided in a CustomerDetailsNotification.	No

Table 13f Paperwork

Field	Format	Definition	Required for a "Cancel" ServiceOrderRequest
FormNumber	VARCHAR(20)	In NSW and ACT, the Section Number is required for the Allocate NMI of a Premise Connection Point. In all other jurisdictions, where the form listed in *FormReference* is numbered, this field is populated with the number on the form. Must be populated for the *ServiceOrderSubType* of 'Temporary Isolation-One In All In' with the *Coordinated Interruption ID.* Must be populated for *ServiceOrderType* of 'Metering Service Works' with *RegClassification* of 'One In All In' with the *Coordinated Interruption ID* and number of *NMIs Impacted* separated by # as the delimiter.	No

Field	Format	Definition	Required for a "Cancel" ServiceOrderRequest
FormReference	VARCHAR(20)	In all other jurisdictions, reference to the forms associated with Supply Works Request and Meter Service Works. Refer to the Service Paperwork reference table in the B2B Guide.	No
MeteringSafetyCertificateID	VARCHAR(15)	Reference to the safety certificate number. Not Required for a "Cancel" ServiceOrderRequest.	No
MeteringSafetyCertificateMethodSent	VARCHAR(6)	Code indicating how the safety certificate has been provided: "Faxed" = Faxed to Recipient "Online" = Available to Recipient from an internet Site "Email" = Emailed to Recipient "OnSite" = Left on Site or already provided by metering party	No
SafetyCertificateId	VARCHAR(15)	Reference to the safety certificate number.	No
SafetyCertificateMethodSent	VARCHAR(6)	Code indicating how the safety certificate has been provided: "Faxed" = Faxed to Recipient "Email" = Emailed to Recipient "Online" = Available to Recipient from an internet Site "OnSite" = Left on Site or already provided by Customer/agent (e.g. REC)	No

Table 13g Roles

Field	Format	Definition	Required for a "Cancel" ServiceOrderRequest
RP	VARCHAR(10)	MC's Participant ID. Mandatory for Supply Service Works ServiceOrderRequest with a *ServiceOrderSubType* of Allocate NMI	No
MDP	VARCHAR(10)	MDP's Participant ID. Mandatory for Supply Service Works ServiceOrderRequest with a *ServiceOrderSubType* of Allocate NMI	No
MPB	VARCHAR(10)	MPB's Participant ID. Mandatory for Supply Service Works ServiceOrderRequest with a *ServiceOrderSubType* of Allocate NMI	No
MPC	VARCHAR(10)	MPC's Participant ID. Mandatory for Supply Service Works ServiceOrderRequest with a *ServiceOrderSubType* of Allocate NMI	No

4.2 ServiceOrderRequest transaction data

Key

M	=	Mandatory (must be provided in all situations).
R	=	Required (must be provided if this information is available or has changed).
O	=	Optional (may be provided and should be used by the Recipient if provided, as per bilateral agreements).
N	=	Not required (not required and may be ignored by the Recipient if provided).

Table 14 A ServiceOrderRequest Field Usage

	Supply Service Works Allocate NMI	Supply Service Works Establish T/TP/P	Supply Service Works Supply Alteration	Supply Service Works Temporary Isolation - All	Supply Service Works Supply Abolishment	Supply Service Works Tariff Change	Update Standing Data	Re-energisation	De-energisation	Special Read	Metering Service Works Install Meter	Metering Service Works Install Meter Isolation Device	Metering Service Works Move Meter	Metering Service Works Exchange Meter	Metering Service Works Remove Meter	Metering Service Works Install Controlled Load	Metering Service Works Meter Reconfiguration	Metering Service Works Meter Investigation – All AND Reseal Device and ChangeTimeSwitch	Metering Service Works Commission Meter	Miscellaneous
ActionType	M	M	M	M	M	M	M	M	M	M	M	M	M	M	M	M	M	M	M	M
ServiceOrderID	M	M	M	M	M	M	M	M	M	M	M	M	M	M	M	M	M	M	M	M
InitiatorID	M	M	M	M	M	M	M	M	M	M	M	M	M	M	M	M	M	M	M	M
RecipientID	M	M	M	M	M	M	M	M	M	M	M	M	M	M	M	M	M	M	M	M
NotifiedPartyID	N	O/N	O/N	O/N	O/N	N	O/N	M/N	M/N	O/N	O/N	O/N	O/N	O/N	O/N	O/N	N	N	O/N	O/N

NTESMO

	Supply Service Works Allocate NMI	Supply Service Works Establish T/TP/P	Supply Service Works Supply Alteration	Supply Service Works Temporary Isolation - All	Supply Service Works Supply Abolishment	Supply Service Works Tariff Change	Update Standing Data	Re-energisation	De-energisation	Special Read	Metering Service Works Install Meter	Metering Service Works Install Meter Isolation Device	Metering Service Works Move Meter	Metering Service Works Exchange Meter	Metering Service Works Remove Meter	Metering Service Works Install Controlled Load	Metering Service Works Meter Reconfiguration	Metering Service Works Meter Investigation – All AND Reseal Device and ChangeTimeSwitch	Metering Service Works Commission Meter	Miscellaneous
ServiceOrderType	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N
ServiceOrderSubType	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	R/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	N
AccessDetails	N	M/N	M/N	M/N	M/N	N	N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	R/N
AppointmentReference	N	R/N	R/N	R/N	R/N	N	N	R/N	R/N	R/N	R/N	R/N	R/N	R/N	R/N	R/N	R/N	R/N	R/N	R/N
AverageDailyLoad	M/N	M/N	M/N	N	N	N	N	N	N	N	M/N	N	N	N	N	N	N	N	N	O
ChangeRequestFieldName	N	N	N	N	N	N	M	N	N	N	N	N	N	N	N	N	N	N	N	N
ChangeRequestValueRequired	N	N	N	N	N	N	M	N	N	N	N	N	N	N	N	N	N	N	N	N
ConfirmedDe-energisation	N	N	N	N	N	N	N	N	M/N	N	N	N	N	N	N	N	N	N	N	N
Co-ordinatingContactName	N	M/N	M/N	M/N	M/N	N	N	N	N	N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	N
Co-ordinatingContactTelephoneNumber	N	M/N	M/N	M/N	M/N	N	N	N	N	N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	N
CustomerAgreedEndDate	N	N	N	N	N	N	N	N	N	N	O/N	O/N	O/N	O/N	O/N	O/N	O/N	O/N	O/N	N
CustomerAgreedStartDate	N	N	N	N	N	N	N	N	N	N	O/N	O/N	O/N	O/N	O/N	O/N	O/N	O/N	O/N	N

	Supply Service Works Allocate NMI	Supply Service Works Establish T/TP/P	Supply Service Works Supply Alteration	Supply Service Works Temporary Isolation - All	Supply Service Works Supply Abolishment	Supply Service Works Tariff Change	Update Standing Data	Re-energisation	De-energisation	Special Read	Metering Service Works Install Meter	Metering Service Works Install Meter Isolation Device	Metering Service Works Move Meter	Metering Service Works Exchange Meter	Metering Service Works Remove Meter	Metering Service Works Install Controlled Load	Metering Service Works Meter Reconfiguration	Metering Service Works Meter Investigation – All AND Reseal Device and ChangeTimeSwitch	Metering Service Works Commission Meter	Miscellaneous
CustomerConsultationRequired	N	M/N	M/N	M/N	M/N	N	N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N
CustomerContactName	N	M/N	M/N	M/N	M/N	N	N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N
CustomerContactTelephoneNumber	N	M/N	M/N	M/N	M/N	N	N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N
CustomerNotificationAddress	N	N	N	N	N	N	N	N	N	N	O/N	O/N	O/N	O/N	O/N	O/N	O/N	O/N	O/N	N
CustomerNotificationEmail	N	N	N	N	N	N	N	N	N	N	O/N	O/N	O/N	O/N	O/N	O/N	O/N	O/N	O/N	N
CustomerNotificationMethod	N	N	N	N	N	N	N	N	N	N	O/N	O/N	O/N	O/N	O/N	O/N	O/N	O/N	O/N	N
CustomersPreferredDateAndTime	N	O/N	O/N	O/N	O/N	N	N	O/N /M	O/N	O/N	O/N	O/N	O/N	O/N	O/N	O/N	O/N	O/N	O/N	O/N
CustomerType	M/N	M/N	M/N	N	N	N	N	N	N	N	R/N	N	N	N	N	N	N	N	R/N	O
De-EnergisationReason	N	N	N	N	N	N	N	N	M	N	N	N	N	N	N	N	N	N	N	N
Effective Date	N	N	N	N	N	N	M	N	N	N	N	N	N	N	N	N	N	N	N	N
Not used in the NT Procedures	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Escalation	N	N	N	N	N	N	N	N	N	N	O/N	O/N	O/N	O/N	O/N	O/N	O/N	O/N	O/N	N
ExemptionCode	N	N	N	N	N	N	N	N	N	N	N	N	O/N	O/N	N	N	N	N	N	N
FormNumber	R/N	R/N	R/N	M/R/N	R/N	N	N	R/N	N	N	M/R/N	M/R/N	R/N	M/R/N	R/N	R/N	R/N	R/N	R/N	O

	Supply Service Works Allocate NMI	Supply Service Works Establish T/TP/P	Supply Service Works Supply Alteration	Supply Service Works Temporary Isolation - All	Supply Service Works Supply Abolishment	Supply Service Works Tariff Change	Update Standing Data	Re-energisation	De-energisation	Special Read	Metering Service Works Install Meter	Metering Service Works Install Meter Isolation Device	Metering Service Works Move Meter	Metering Service Works Exchange Meter	Metering Service Works Remove Meter	Metering Service Works Install Controlled Load	Metering Service Works Meter Reconfiguration	Metering Service Works Meter Investigation – All AND Reseal Device and ChangeTimeSwitch	Metering Service Works Commission Meter	Miscellaneous
FormReference	R/N	R/N	R/N	R/N	R/N	N	N	R/N	N	N	R/N	R/N	R/N	R/N	R/N	R/N	R/N	R/N	R/N	O
Not used in the NT Procedures	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Not used in the NT Procedures	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
HazardDescription	N	R/N	R/N	R/N	R/N	N	N	R/N	R/N	R/N	R/N	R/N	R/N	R/N	R/N	R/N	R/N	R/N	R/N	R/N
InitiatorContactName	O/N	O/N	O/N	O/N	O/N	N	N	O/N	O/N	O/N	O/N	O/N	O/N	O/N	O/N	O/N	O/N	O/N	O/N	O/N
InitiatorContactTelephoneNumber	M/N	M/N	M/N	M/N	M/N	N	N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N
InstallationType	R/N	M/N	M/N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	O
LifeSupport	M/N	M/N	M/N	M/N	M/N	M/N	N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N
MaximumDemand	R/N	R/N	R/N	N	N	R/N	N	N	N	N	R/N	N	N	N	N	N	N	N	R/N	O
MDP	M	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N
MeteringRequired	N	N	N	N	N	N	N	N	N	N	M/N	M/N	N	M/N	N	R/N	N	N	M/N	O
MeteringSafetyCertificateID	N	R/N	R/N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	O
MeteringSafetyCertificateMethodSent	N	R/N	R/N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	O

	Supply Service Works Allocate NMI	Supply Service Works Establish T/TP/P	Supply Service Works Supply Alteration	Supply Service Works Temporary Isolation - All	Supply Service Works Supply Abolishment	Supply Service Works Tariff Change	Update Standing Data	Re-energisation	De-energisation	Special Read	Metering Service Works Install Meter	Metering Service Works Install Meter Isolation Device	Metering Service Works Move Meter	Metering Service Works Exchange Meter	Metering Service Works Remove Meter	Metering Service Works Install Controlled Load	Metering Service Works Meter Reconfiguration	Metering Service Works Meter Investigation – All AND Reseal Device and ChangeTimeSwitch	Metering Service Works Commission Meter	Miscellaneous
MeterInstallCode	N	N	N	N	N	R/N	N	N	N	N	M/R/N	R/N	N	R/N	N	N	N	N	M/R/N	O
MeterSerialNumber	N	N	N	N	N	M/N	N	N	N	N	N	N	M/N	M/N	M/N	R/N	M/N	M/N	N	R/N
MPB	M	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N
MPC	M	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N
NMI	N	M	M	M	M	M	M	M	M	M	M	M	M	M	M	M	M	M	M	M
NMIChecksum	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O
NMIClassificationRequired	M/N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N
NMIStatusCode	N	M/N	M/N	N	N	N	O/N	N	N	N	N	N	N	N	N	N	N	N	N	O
OffPeakRequirements	R/N	R/N	R/N	N	N	R/N	N	N	N	N	R/N	R/N	N	R/N	N	N	N	N	N	O
PremisesNMI	M/N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N
PremisesNMICheckSum	O	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N
ProposedTariff	N	N	N	N	N	M/N	N	N	N	N	M/N	M/N	N	M/N	N	N	R/N	N	N	O/N
PurposeOfRequest	N	N	N	N	N	N	M	N	N	N	O/N	O/N	O/N	O/N	N	O/N	O/N	O/N	O/N	N

	Supply Service Works Allocate NMI	Supply Service Works Establish T/TP/P	Supply Service Works Supply Alteration	Supply Service Works Temporary Isolation - All	Supply Service Works Supply Abolishment	Supply Service Works Tariff Change	Update Standing Data	Re-energisation	De-energisation	Special Read	Metering Service Works Install Meter	Metering Service Works Install Meter Isolation Device	Metering Service Works Move Meter	Metering Service Works Exchange Meter	Metering Service Works Remove Meter	Metering Service Works Install Controlled Load	Metering Service Works Meter Reconfiguration	Metering Service Works Meter Investigation – All AND Reseal Device and ChangeTimeSwitch	Metering Service Works Commission Meter	Miscellaneous
REC-AttendanceRequired	R/N	M/N	M/N	N	N	N	N	N	N	N	M/N	N	N	N	N	N	N	N	M/N	O
REC-BusinessName	R/N	M/N	M/N	N	N	N	N	N	N	N	M/N	N	N	N	N	N	N	N	M/N	O
REC-ID	R/N	M/N	M/N	N	N	N	N	N	N	N	M/N	N	N	N	N	N	N	N	M/N	O
REC-Name	R/N	M/N	M/N	N	N	N	N	N	N	N	M/N	N	N	N	N	N	N	N	M/N	O
REC-Telephone	R/N	M/N	M/N	N	N	N	N	N	N	N	M/N	N	N	N	N	N	N	N	M/N	O
RegClassification	N	N	N	N	N	N	N	N	N	N	M	M	N	M	N	N	N	N	M	N
RP	M	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N
SafetyCertificateId	R/N	R/N	R/N	N	N	N	N	R/N	N	N	R/N	R/N	R/N	R/N	R/N	R/N	R/N	R/N	R/N	O
SafetyCertificateMethodSent	R/N	R/N	R/N	N	N	N	N	R/N	N	N	R/N	R/N	R/N	R/N	R/N	R/N	R/N	R/N	R/N	O
ScheduledDate	N	M/N	M/N	M/N	M/N	M/N	N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N
ServiceOrderAddress	M	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N
ServiceOrderCo-ordinationRequired	N	M/N	M/N	M/N	M/N	N	N	N	N	N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	N
ServiceTime	N	M/N	M/N	M/N	M/N	M/N	N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N	M/N

	Supply Service Works Allocate NMI	Supply Service Works Establish T/TP/P	Supply Service Works Supply Alteration	Supply Service Works Temporary Isolation - All	Supply Service Works Supply Abolishment	Supply Service Works Tariff Change	Update Standing Data	Re-energisation	De-energisation	Special Read	Metering Service Works Install Meter	Metering Service Works Install Meter Isolation Device	Metering Service Works Move Meter	Metering Service Works Exchange Meter	Metering Service Works Remove Meter	Metering Service Works Install Controlled Load	Metering Service Works Meter Reconfiguration	Metering Service Works Meter Investigation – All AND Reseal Device and ChangeTimeSwitch	Metering Service Works Commission Meter	Miscellaneous
SpecialInstructions	O/M	O/M	O/M	O/M	O/M	O/M	O/M	O/M	O/M	O/M	O/M	O/M	O/M	O/M	O/M	O/M	O/M	O/M	O/M	O/M
SupplyPhases	M/N	M/N	M/N	N	N	N	N	N	N	N	M/N	M/N	N	M/N	N	N	N	N	N	O
SwitchingServiceRequired	N	R/N	R/N	N	N	N	N	N	N	N	R/N	N	N	N	N	R/N	N	N	N	O

4.3 ServiceOrderResponse transaction data

Key

M	=	Mandatory (must be provided in all situations).
R	=	Required (must be provided if this information is available or has changed).
O	=	Optional (may beprovided).
N	=	Not required (not to be provided).

Table 15 Service Order Transaction

Field	Format	Definition	All Responses
ResponseType	VARCHAR(15)	A code used to indicate Closure = closing out a Service Order.	M
ServiceOrderID	VARCHAR(15)	Initiator defined reference, used for reference and tracking. This is the same field as the one provided in the Initiator's ServiceOrderRequest. The Format must match exactly that used in the ServiceOrderRequest (including leading or trailing zeros and spaces). This is the same field as the one in the MDFF file. Format must exactly match that used in the ServiceOrderRequest (including leading or trailing zeros and spaces).	M
InitiatorID	VARCHAR(10)	The Participant ID of the Initiator of the ServiceOrderRequest to which this response is related.	M
RecipientID	VARCHAR(10)	This is the Participant ID of the Recipient. This is the party providing the Service Order response.	M
NMI	CHAR(10)	*NMI* (as used by MSATS). This field is Mandatory for all Responses except Responses Service Work ServiceOrderRequest with a sub type of Allocate *NMI* Requests with a *ServiceOrderStatus* of "Not Completed".	M/N
NMIChecksum	CHAR(1)	*NMI* Checksum (as used by MSATS).	O
ServiceOrderAddress	ADDRESS (Structured)	Site/Service Point address in a structured format. For details of the ADDRESS structure, refer B2B Procedure Technical Specification. This field is Mandatory if the *NMI* is not provided in the Response.	M/N
ServiceOrderStatus	VARCHAR(20)	Indicates status of Service Order. Completed = Completed. Partially Completed =Partially Completed (primary work done, but not all aspects of the request were completed – see relevant *ExceptionCodes*). Not Completed =Not completed (primary work not done - see relevant *ExceptionCodes*). Note: "Primary work" means the activity described by the *ServiceOrderType* field.	M

Field	Format	Definition	All Responses
		The *SpecialNotes* field must be used if a *ServiceOrderStatus* of "Partially Completed" or "Not Completed" is used.	
ExceptionCode	VARCHAR(80)	Note: this field is Mandatory if *ServiceOrderStatus* is "Not Completed" or "Partially Completed" (refer 2.10.a). Refer to section 2.15, Table 5, for the use of exception codes.	M/R
ActualDateAndTime	DATETIME	Actual date and time work was attempted or completed. Where the ServiceOrderRequest is not attempted (for example when it is cancelled), this field must be populated with the date and time of the cancellation in the Recipient's system.	
SpecialNotes	VARCHAR(240)	Any special notes related to the Request and fieldwork that the Recipient wishes to make the Initiator aware of. Mandatory where *ExceptionCode* value of "Other", "Recipient Cancellation", or "Documentation Not Provided" is provided, or a *ServiceOrderStatus* of "Partially Completed" or "Not Completed" is used.	M/O
RecipientContactName	PERSONNAME	Contact name of Recipient, to be provided where Initiator may need to contact the Recipient.	O
RecipientContactTelephon eNumber	TELEPHONE	Contact telephone number of Recipient. This is mandatory where the *RecipientContactName* is populated. A maximum of three telephone numbers must be provided.	O
RecipientReference	VARCHAR(15)	Recipient defined reference, used for reference and tracking. Not necessarily unique. This field is for information only and must not be used for validation of the Response. Where the *ExceptionCode* of "Defect" is used, this field must be populated with the allowable values of the as published in the AEMO Standing Data for MSATS document.	R
ProductCode	VARCHAR(10)	Standard Codes are: "No Charge" = means there is no fee for the service provided. "Cost TBA" = meansthe Recipient needs to do further investigation to determine what work was attempted or completed at the Site. Refer section 2.10.c. "As Quoted" = means the parties have previously agreed the price for the work. At least one *ProductCode* must be provided. This field repeats to allow provision of details for multiple *Product Codes.*	M

4.4 BusinessAcceptance/Rejection transaction data

Key

M	=	Mandatory (must be provided in all situations).
R	=	Required (must be provided if this information is available or has changed).
O	=	Optional (may beprovided).
N	=	Not required (not to be provided).

Table 16 Business Acceptance Rejection data

Field	Format	Definition	All ServiceOrderTypes
EventCode	NUMERIC(4)	A code to indicate acceptance or the reason for the rejection.	M
KeyInfo	VARCHAR(15)	The Service Order of the transaction being accepted or rejected.	M
Context	EVENT CONTEXT	The Data Element in the received Business Document (e.g. RequiredDate) that causes the Event.	O
Explanation	UNLIMITED VARCHAR	An explanation of the event. Must be provided where the Business Event requires an Explanation.	M/O

4.4.1 Applicable events and their EventCodes

a. Participants must use the most relevant Business Event(s). Where multiple *EventCode(s)* are applicable these may be provided.

b. Below is the reference table for Business Events that can apply to this process and the relevant Business Signals.

Table 17 Business Event Codes

Business Document	Business Signal	Business Event	Explanation Required	Severity	EventCode	Relevant Procedure clause or Reference Notes
ServiceOrderRequest	*BusinessAcceptance/Rejection*	*ServiceOrderSubType* does not match *ServiceOrderType.*	No	Error	1910	
ServiceOrderRequest	*BusinessAcceptance/Rejection*	Unable to perform the work within the Required Timeframe, alternative date provided in *Explanation*.	Yes	Warning	1912	
ServiceOrderRequest	*BusinessAcceptance/Rejection*	Unable to perform the work within the Required Timeframe, alternative date provided in *Explanation*.	Yes	Error	2000	
ServiceOrderRequest	*BusinessAcceptance/Rejection*	New Request with previously used *ServiceOrderID*.	No	Error	1914	
ServiceOrderRequest	*BusinessAcceptance/Rejection*	Recipient does not support this	No	Error	1915	

Business Document	Business Signal	Business Event	Explanation Required	Severity	EventCode	Relevant Procedure clause or Reference Notes
		ServiceOrderType or *ServiceOrderSubType.*				
ServiceOrderRequest	*BusinessAcceptance/Rejection*	The Request falls outside the Recipient's regulatory obligations.	Yes	Error	1957	
ServiceOrderRequest	*BusinessAcceptance/Rejection*	Invalid *AppointmentReference*.	No	Error	1916	
ServiceOrderRequest	*BusinessAcceptance/Rejection*	Unable to cancel ServiceOrderRequest. Requested work has commenced or is completed.	No	Error	1917	2.8
ServiceOrderRequest	*BusinessAcceptance/Rejection*	*NMI* already allocated for this address.	No	Error	1918	
ServiceOrderRequest	*BusinessAcceptance/Rejection*	Requested *metering* configuration is incorrect.	Yes	Error	1919	
ServiceOrderRequest	*BusinessAcceptance/Rejection*	No Meter At Site.	No	Error	1941	When a ServiceOrderRequest requires a *meter* to be present at the Site but there is no *meter* installed at the Site.
ServiceOrderRequest	*BusinessAcceptance/Rejection*	Unable To Cancel, Original Request Not Received.	No	Error	1937	2.8. – Used where a "Cancel" ServiceOrderRequest is received without a matching "New" ServiceOrderRequest.
ServiceOrderRequest	*BusinessAcceptance/Rejection*	Previous Cancellation Already Processed.	No	Error	1938	2.8.– Used where a "New" ServiceOrderRequest is received after "Cancel"

Business Document	Business Signal	Business Event	Explanation Required	Severity	EventCode	Relevant Procedure clause or Reference Notes
						version of the same Request has been rejected.
ServiceOrderRequest	*BusinessAcceptance/Rejection*	Initiator Is Not Permitted To Raise This Service Order Type.	No	Error	1945	
ServiceOrderRequest	*BusinessAcceptance/Rejection*	Rejection – Site already de-energised.	No	Error	1944	
ServiceOrderRequest	*BusinessAcceptance/Rejection*	Request submitted by another Initiator.	No	Error	1956	
ServiceOrderRequest	*BusinessAcceptance/Rejection*	*ServiceOrderID* value of the original Request that was rejected is not in *SpecialInstructions*.	No	Error	1955	
ServiceOrderRequest	*BusinessAcceptance/Rejection*	*ScheduledDate* greater than 100 calendar days in the future.	No	Error	1954	
ServiceOrderRequest	*BusinessAcceptance/Rejection*	Documentation required.	No	Warning	1953	
ServiceOrderRequest	*BusinessAcceptance/Rejection*	"Replace" ServiceOrderRequest sent without the prior agreement of the Recipient.	No	Error	1967	
ServiceOrderRequest	*BusinessAcceptance/Rejection*	Unable To Cancel, Original Request Rejected.	No	Error	1964	
ServiceOrderRequest	*BusinessAcceptance/Rejection*	Invalid Multiple Service Order Combination.	Yes	Error	1952	
ServiceOrderRequest	*BusinessAcceptance/Rejection*	Unable to perform the work due to	Yes	Error	2002	

Business Document	Business Signal	Business Event	Explanation Required	Severity	EventCode	Relevant Procedure clause or Reference Notes
		unacceptable notice period provided, alternative time provided in Explanation.				
ServiceOrderRequest	*BusinessAcceptance/Rejection*	Unable to perform Service Order due to communications disabled.	Yes	Error	2004	
ServiceOrderRequest	*BusinessAcceptance/Rejection*	Unable to perform Service Order as communications does not exist.	Yes	Error	2005	
ServiceOrderRequest	*BusinessAcceptance/Rejection*	Service Not Provided.	No	Error	2006	
ServiceOrderRequest	*BusinessAcceptance/Rejection*	No Contract for service.	No	Error	2007	
ServiceOrderRequest	*BusinessAcceptance/Rejection*	No Comms.	No	Error	2009	
ServiceOrderRequest	*BusinessAcceptance/Rejection*	Unknown Connection Status.	Yes	Error	2010	
ServiceOrderRequest	*BusinessAcceptance/Rejection*	Meter Not Retrieved.	No	Warning	2011	
ServiceOrderRequest	*BusinessAcceptance/Rejection*	Site Already Energised.	No	Warning	2012	Used for Service Order sub types other than 're-energisation' Cl 2.16.2
ServiceOrderRequest	*BusinessAcceptance/Rejection*	Shared Supply Point.	Yes	Error	2013	
ServiceOrderRequest	*BusinessAcceptance/Rejection*	Tariff Change Not Approved.	Yes	Error	2014	
ServiceOrderRequest	*BusinessAcceptance/Rejection*	Defect registered against NMI in MSATS	Yes	Error	2015	Used to indicate when a ServiceOrderRequest is

Business Document	Business Signal	Business Event	Explanation Required	Severity	EventCode	Relevant Procedure clause or Reference Notes
						received to exchange a meter at a defective metering installation *without* clearly indicating that the defect has been remediated.
ServiceOrderResponse	*BusinessAcceptance/Rejection*	*ActualDateAndTime* is after the date and time the ServiceOrderResponse was sent.	No	Error	1921	
ServiceOrderResponse	*BusinessAcceptance/Rejection*	Product Code does not match requested work.	No	Warning	1951	
ServiceOrderAppointmentNotification	*BusinessAcceptance/Rejection*	Appointment Notification does not match a ServiceOrderRequest.	No	Error	1922	
All	*All*	Accept.	No	Information	0	
All	*All*	Data missing. Details provided in *Explanation.*	Yes	Error	201	Used where data with a usage of Required in the Procedure is missing.
All	*All*	Invalid data. Details provided in *Explanation.*	Yes	Error	202	Covers situations where the data in individual or combinations of fields is invalid.

Business Document	Business Signal	Business Event	Explanation Required	Severity	EventCode	Relevant Procedure clause or Reference Notes
All	*All*	Mandatory field not populated. Missing field(s) listed in *Explanation*.	Yes	Error	1950	Used where a field with a usage of Mandatory in the Procedure is not supplied.
All	*All*	*NMIChecksum* invalid.	No	Error	1924	
All	*All*	Recipient did not initiate Request.	Yes	Error	206	
All	*All*	Recipient is not responsible for the supplied *NMI*.	Yes	Error	1923	

Contact

Power and Water – 1800 245 092 from 8am to 5pm weekdays.
Market Operator – 08 8985 7252
Email: market.operator@powerwater.com.au

NTESMO