



ITEM 5 : ITEM NUMBER 501207
EXIT STRAIGHT AHEAD

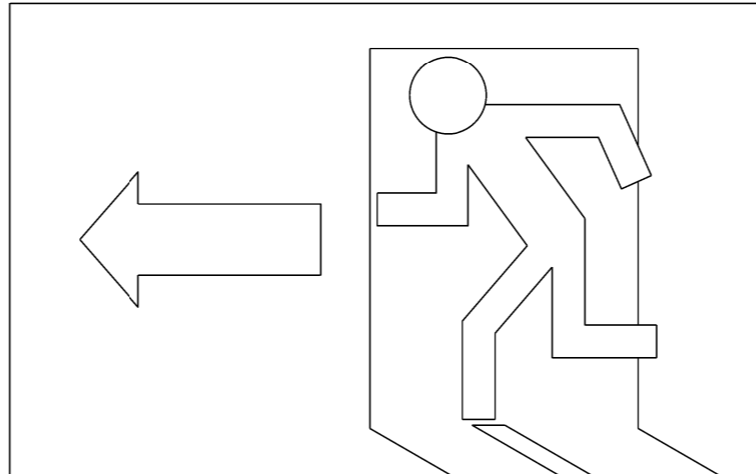

ITEM 6 : ITEM NUMBER 501206
EXIT TO THE LEFT

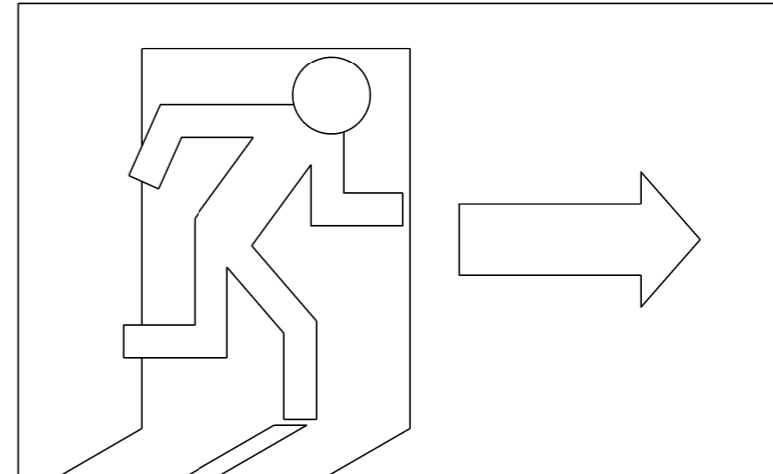

ITEM 7 : ITEM NUMBER 501208
EXIT TO THE RIGHT

NOTES

- 1 MATERIAL TO BE NON-RADIOACTIVE FILM LUMINESCENT OR PHOSPHORESCENT CAPABLE OF STORING AMBIENT LIGHT AND EMITTING LIGHT AS STATED IN NOTE 2 AFTERGLOW.
- 2 AFTERGLOW (EMISSION) MUST BE PERCEPTABLE TO DARK ADAPTED EYE FOR 10 HOURS AS FOLLOWS:
PHASE ONE -FIRST 30 MINUTES - BRIGHTNESS DECREASES BY APPROXIMATELY 80%
PHASE TWO - 8 HOURS - BRIGHTNESS DECREASES GRADUALLY AT A RATE EQUIVALENT TO THE PERCEPTION OF A DARK ADAPTING HUMAN EYE.
- 3 MATERIAL MUST RECHARGE IN APPROX 4 MINUTES WHEN EXPOSED TO NORMAL OFFICE LIGHTING.
- 4 MUST BE WASHABLE AND HAVE A MINIMUM 20 YEAR LIFE UNDER INDOOR CONDITIONS.
- 5 BACKING TO BE SUITABLY ROBUST MATERIAL COMPATIBLE WITH LUMINESCENT FILM.
- 6 COLOURS:
 LUMINOUS GREEN (BACKGROUND)
 LUMINOUS YELLOW (SYMBOLS)

5	TITLEBLOCK & DRAWING NUMBER FORMATTED	K.T.	FEB'19	C.C.	C.C.
4	ITEMS 1, 2, 3 AND 4 REMOVED STOCK CODES AND NOTES UPDATED REDRAWN IN CAD	C.C.	MAY'13	A.T.	B.C.
NO	DESCRIPTION	DRN	DATE	CKD	APPD
AMENDMENTS					



DES	A.TAYLOR	POWER STANDARD DRAWING			
DRN	C.COPPINS	SIGNS EMERGENCY EXIT LUMINOUS			
CKD	A.TAYLOR				
APPD	A.TAYLOR				
SCALE	N.T.S.				
ISSUED	NOV'10	A3	DRAWING NUMBER	S02-01-08-09	
ALL DIM.	IN mm				
DRAFTING STANDARD TO A.S.1100			CAD PRODUCT - DO NOT AMEND MANUALLY		AMDT